


Precision Thin Film Chip Resistors

PFC Series

- Standard 60/40 Sn/Pb and Pb-free (RoHS compliant) terminations available
- Available in 0402, 0603, 0805 and 1206
- Tested for COTS applications
- Absolute TCR to $\pm 10\text{ppm}/^\circ\text{C}$
- MIL screening available
- Superior anti-sulfuration characteristics

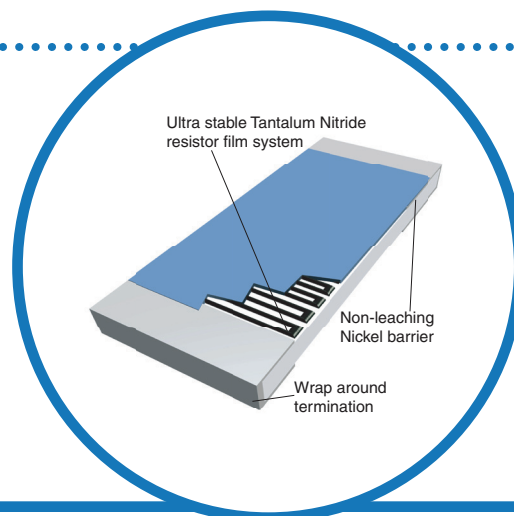

The IRC TaNFilm® PFC chip resistor series provides the high precision and ultra stable performance of our Tantalum Nitride resistive film system in 0402, 0603, 0805 and 1206 sizes. The unique characteristics of the passivated Tantalum Nitride film ensure long term life stability and reliability in most environments. Qualified for resistance to sulfur bearing gases, the PFC series is an excellent solution for automotive and heavy equipment applications where precision, exceptional reliability with anti-sulfuration characteristics is imperative.

Using the same manufacturing line as the PFC Military Series, IRC's precision chips maintain the same superior environmental performance. Specially selected materials and processes insure initial precision is maintained in the harshest surface mount soldering environment. Wrap-around terminations with leach-resistant nickel barriers insure high integrity solder connections.

Electrical Data

Model	Power Rating (70°C)	Max Voltage Rating ($\leq \sqrt{P \times R}$)	Temperature Range	ESD Sensitivity	Noise	Termination	Substrate
W0402	50mW	75V	-65°C to +150°C	2KV to 4KV (HBM)	<-25dB	100% matte tin (RoHS compliant) plated over nickel barrier	99.5% Alumina
W0603	100mW	75V					
W0805	250mW	100V					
W1206	333mW	200V					

Environmental Data

Environmental Test	Test Method	Performance	
		Typical	Maximum
Sulfuration Test	ASTM B-809 (Modified) 105°C Dry, 1000 Hours	$\pm 0.02\%$	$\pm 0.05\%$
Thermal Shock	MIL-PRF-55342	$\pm 0.02\%$	$\pm 0.10\%$
Low Temperature Operation	MIL-PRF-55342	$\pm 0.01\%$	$\pm 0.05\%$
Short Time Overload	MIL-PRF-55342	$\pm 0.01\%$	$\pm 0.05\%$
High Temperature Exposure	MIL-PRF-55342	$\pm 0.03\%$	$\pm 0.10\%$
Effects of Solder	MIL-PRF-55342	$\pm 0.01\%$	$\pm 0.10\%$
Moisture Resistance	MIL-PRF-55342	$\pm 0.03\%$	$\pm 0.10\%$
Life	MIL-PRF-55342	$\pm 0.03\%$	$\pm 0.10\%$

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Manufacturing Capabilities Data

									Tolerance	
									±5%, ±2%, ±1%, ±0.5%, ±0.1%, ±0.05%, ±0.02%	
									±5%, ±2%, ±1%, ±0.5%, ±0.1%, ±0.05%	
									±5%, ±2%, ±1%, ±0.5%, ±0.1%	
W0402	7.5Ω	10Ω	50Ω	100Ω		16KΩ	24KΩ	30KΩ	Resistance Range	
W0603	5 Ω	10Ω	50Ω	100Ω		50KΩ	75KΩ	100KΩ		
W0805	5 Ω	10Ω	50Ω	100Ω		100KΩ	180KΩ	267KΩ		
W1206	5 Ω	10Ω	50Ω	100Ω		400KΩ	650KΩ	1.0MΩ		
									±50 or ±100 ppm/°C	TCR
									±25 ppm/°C	
									±15 ppm/°C	
									±10 ppm/°C	


General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Environmental Data

Environmental Test MIL-PRF-55342	Maximum ΔR per Characteristic E	Performance	
		Typical	Maximum
Thermal Shock	$\pm 0.10\%$	$\pm 0.02\%$	$\pm 0.10\%$
Low Temperature Operation	$\pm 0.10\%$	$\pm 0.01\%$	$\pm 0.05\%$
Short Time Overload	$\pm 0.10\%$	$\pm 0.01\%$	$\pm 0.05\%$
High Temperature Exposure	$\pm 0.10\%$	$\pm 0.03\%$	$\pm 0.10\%$
Effects of Solder	$\pm 0.20\%$	$\pm 0.01\%$	$\pm 0.10\%$
Moisture Resistance	$\pm 0.20\%$	$\pm 0.03\%$	$\pm 0.10\%$
Life	$\pm 0.50\%$	$\pm 0.03\%$	$\pm 0.10\%$


Power Derating Curve

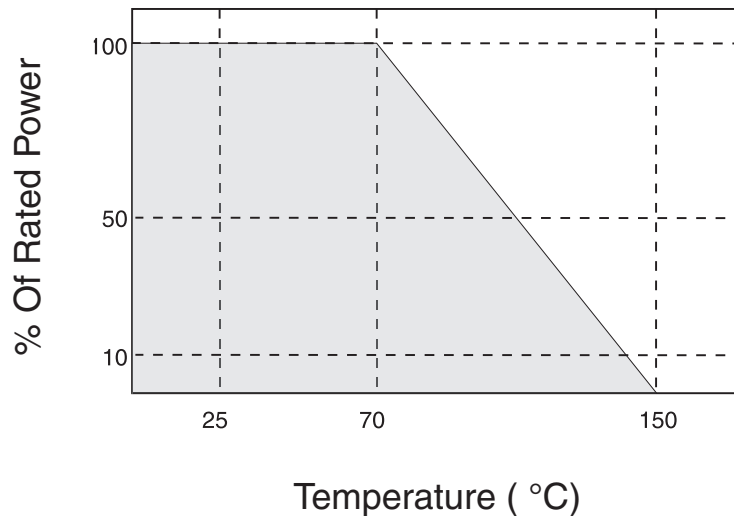

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Physical Data

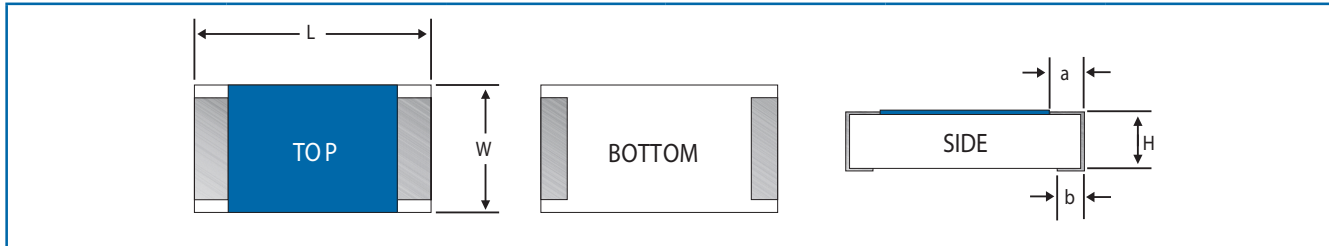


Model	L	W	H	a	b
W0402	0.040" ±0.002	0.021" ±0.002	0.012" ±0.003	0.008" ±0.002	0.010" ±0.002
W0603	0.063" ±0.004	0.031" ±0.004	0.020" ±0.004	0.012" ±0.005	0.015" ±0.005
W0805	0.081" ±0.005	0.050" ±0.005	0.020" ±0.006	0.015" ±0.008	0.016" ±0.008
W1206	0.126" ±0.006	0.063" ±0.005	0.024" ±0.004	0.025" ±0.010	0.025" ±0.010

MIL Screened Precision Chip Resistors

IRC's PFC chip resistors are available with MIL screening. These chips are manufactured on the same production line as our Mil-qualified chip resistors and screened in accordance with MIL-PRF-55342.


These chips are identified with IRC's ordering information and not with MIL marking.

Commercial Ordering Data

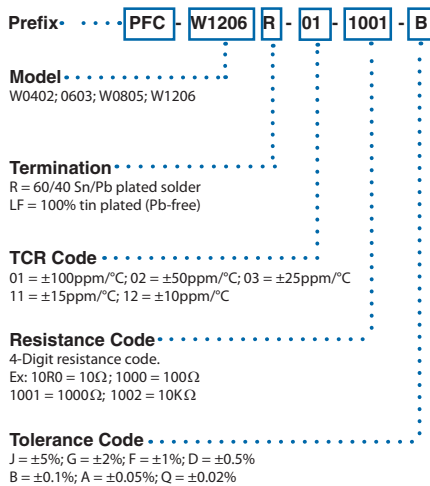


For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

Mil Screened Ordering Data*

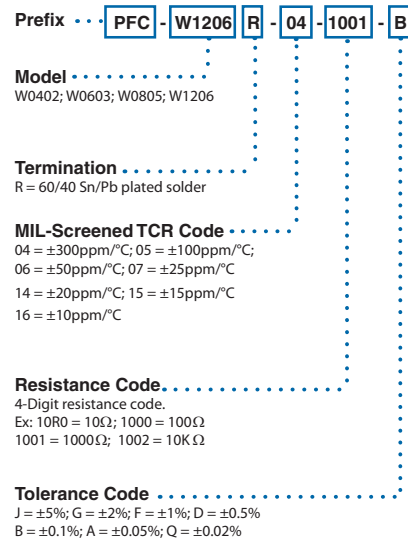

*Please refer to our MIL-Chip Series datasheet to order parts qualified to MIL-PRF-55342.

Anti-Sulfuration Ordering Data

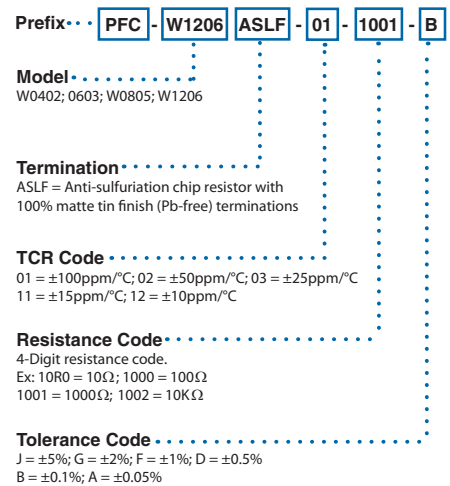

For additional information or to discuss your specific requirements, please contact our Applications Team using the contact details below.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thick Film Resistors - SMD category](#):

Click to view products by [IRC manufacturer](#):

Other Similar products are found below :

[CRCW04028R20JNEE](#) [CRCW06036K80FKEE](#) [CRG1206F1K58](#) [CRL0603-FW-R700ELF](#) [M55342K06B6E19RWL](#) [RC1005F1072CS](#)
[RC1005F471CS](#) [RC1005F4751CS](#) [RCP0603W100RGED](#) [RCWP72251K47FKWB](#) [RLR05C7501GPB14](#) [RLR07C5111FSBSL](#) [ERJ-](#)
[1GMF1R00C](#) [ERJ-1GMF1R20C](#) [ERJ-1GMF2R55C](#) [ERJ-1GMF8R66C](#) [25121WF1003T4E](#) [25.501.3653.0](#) [290-1.0M-RC](#) [292-1.0M-RC](#) [292-](#)
[2.2K-RC](#) [292-4.7K-RC](#) [25121WF4700T4E](#) [292-470K-RC](#) [302-1.0M-RC](#) [CPG1206F10KC](#) [CRCW02011R00FXED](#) [CRCW060315K0FKEE](#)
[CRCW060320K5FKEE](#) [CRG0201F10K](#) [RCG0402150RFKED](#) [RCG04023K92FKED](#) [RCP2512B100RGWB](#) [RCWP110010R0FKS3](#)
[RCWP11002K00FKS3](#) [RCWP12061K00FKS2](#) [3520510RJT](#) [352075KJT](#) [M55342K11B9E53RUL](#) [RMC16-102JT](#) [RMC1JPTE](#) [TR0603MR-](#)
[075K1L](#) [5-2176094-4](#) [35202K7JT](#) [WF06Q1000FTL](#) [ERJ-S03J1R0V](#) [ERJ-S14J4R7U](#) [CHP2512L4R30GNT](#) [CPCC10270R0JE32](#)
[RCWP11001K00FKS3](#)