

CNY17-1X, CNY17-2X, CNY17-3X,
CNY17-4X, CNY17-5X CNY17-1,
CNY17-2, CNY17-3, CNY17-4,



ISOCOM

COMPONENTS

OPTICALLY COUPLED ISOLATOR PHOTOTRANSISTOR OUTPUT



APPROVALS

- UL recognised, File No. E91231
Package System GG
- 'X' SPECIFICATION APPROVALS
 - VDE 0884 in 3 available lead forms: -
 - STD
 - G form
 - SMD approved to CECC 00802
- Certified to EN60950 by

Nemko - Certificate No. P01102464

DESCRIPTION



The CNY17-1, CNY17-2, CNY17-3, CNY17-4, CNY17-5 series of optically coupled isolators consist of an infrared light emitting diode and a NPN silicon photo transistor in a standard 6 pin dual in line plastic package.

FEATURES

- Options :-
 - 10mm lead spread - add G after part no.
 - Surface mount - add SM after part no.
 - Tape&reel - add SMT&R after part no.
- High BV_{CEO} (70V min)
- High Isolation Voltage ($5.3kV_{RMS}$, $7.5kV_{PK}$)
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

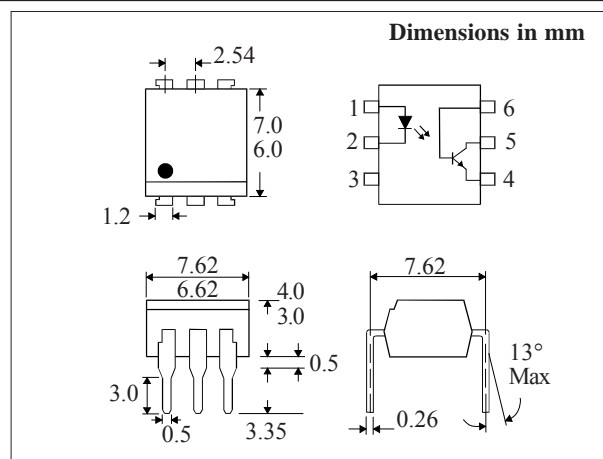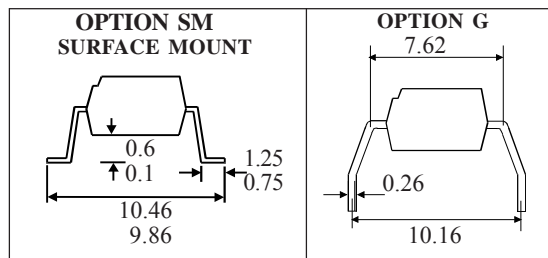

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature _____ -55°C to +150°C
 Operating Temperature _____ -55°C to +100°C
 Lead Soldering Temperature
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

INPUT DIODE

Forward Current _____ 60mA
 Reverse Voltage _____ 6V
 Power Dissipation _____ 105mW

OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO} _____ 70V
 Collector-base Voltage BV_{CBO} _____ 70V
 Emitter-collector Voltage BV_{ECO} _____ 7V
 Collector Current _____ 50mA
 Power Dissipation _____ 160mW

POWER DISSIPATION

Total Power Dissipation _____ 200mW
 (derate linearly 2.67mW/°C above 25°C)

ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West,
 Park View Industrial Estate, Brenda Road
 Hartlepool, TS25 1UD England
 Tel: (01429)863609 Fax: (01429)863581 e-mail
 sales@isocom.co.uk http://www.isocom.com

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

| PARAMETER | | MIN | TYP | MAX | UNITS | TEST CONDITION |
|---|--|-----|-----|-----------|---------------------------------|---------------------------------------|
| Input | Forward Voltage (V_F) | | 1.2 | 1.65 | V | $I_F = 60\text{mA}$ |
| | Reverse Current (I_R) | | | 10 | μA | $V_R = 6\text{V}$ |
| Output | Collector-emitter Breakdown (BV_{CE0}) | 70 | | | V | $I_C = 1\text{mA}$ (Note 2) |
| | Collector-base Breakdown (BV_{CBO}) | 70 | | | V | $I_C = 100\mu\text{A}$ |
| | Emitter-collector Breakdown (BV_{ECO}) | 7 | | | V | $I_E = 100\mu\text{A}$ |
| | Collector-emitter Dark Current (I_{CEO}) | | | 50 | nA | $V_{CE} = 10\text{V}$ |
| Coupled | Current Transfer Ratio (CTR) (Note 2) | | | | | |
| | CNY17-1 | 40 | 80 | | % | $10\text{mA } I_F, 5\text{V } V_{CE}$ |
| | CNY17-2 | 63 | 125 | | % | $10\text{mA } I_F, 5\text{V } V_{CE}$ |
| | CNY17-3 | 100 | 200 | | % | $10\text{mA } I_F, 5\text{V } V_{CE}$ |
| | CNY17-4 | 160 | 320 | | % | $10\text{mA } I_F, 5\text{V } V_{CE}$ |
| | CNY17-5 | 200 | 400 | | % | $10\text{mA } I_F, 5\text{V } V_{CE}$ |
| | Collector-emitter Saturation Voltage $V_{CE(SAT)}$ | | | 0.4 | V | $10\text{mA } I_F, 2.5\text{mA}$ |
| Input to Output Isolation Voltage V_{ISO} | 5300 | | | V_{RMS} | See note 1 | |
| Input-output Isolation Resistance R_{ISO} | 5×10^{10} | | | Ω | $V_{IO} = 500\text{V}$ (note 1) | |

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

TYPICAL SWITCHING CHARACTERISTICS

1. Linear Operation (without saturation) Fig 1.
 $I_F = 10\text{mA}$, $V_{CC} = 5\text{V}$, $R_L = 75\Omega$

| | | | UNITS |
|-------------------|-----------|-----|---------------|
| Turn-on Time | t_{on} | 3.0 | μs |
| Rise Time | t_r | 2.0 | μs |
| Turn-off Time | t_{off} | 2.3 | μs |
| Fall Time | t_f | 2.0 | μs |
| Cut-off Frequency | F_{CO} | 250 | kHz |


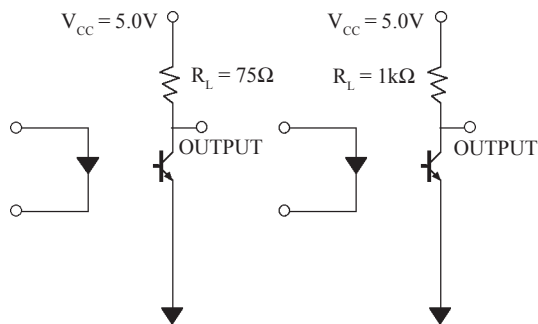


FIG 1


FIG 2

2. Switching Operation (with saturation) Fig 2
 $V_{CC} = 5\text{V}$, $R_L = 1\text{k}\Omega$


| GROUP | -1 ($I_F = 20\text{mA}$) | -2 and -3 ($I_F = 10\text{mA}$) | -4 ($I_F = 5\text{mA}$) | UNITS | |
|---------------|-------------------------------|--------------------------------------|------------------------------|------------|---------------|
| Turn-on Time | t_{on} | 3.0 | 4.2 | 6.0 | μs |
| Rise Time | t_r | 2.0 | 3.0 | 4.6 | μs |
| Turn-off Time | t_{off} | 18 | 23 | 25 | μs |
| Fall Time | t_f | 11 | 14 | 15 | μs |
| V_{CESAT} | | | | ≤ 0.4 | V |

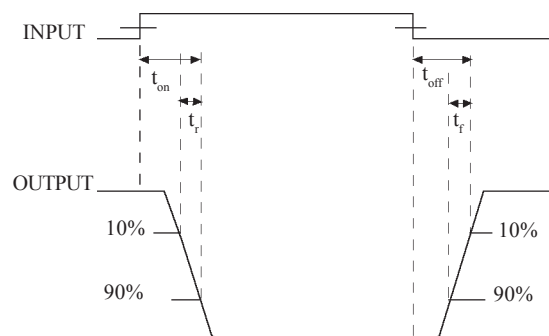


Collector Power Dissipation vs. Ambient Temperature

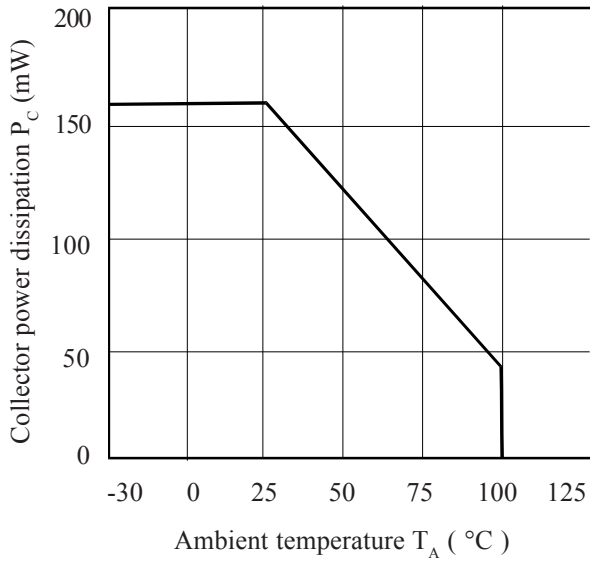


Collector Current vs. Collector-emitter Voltage (normalised to CNY17-3)

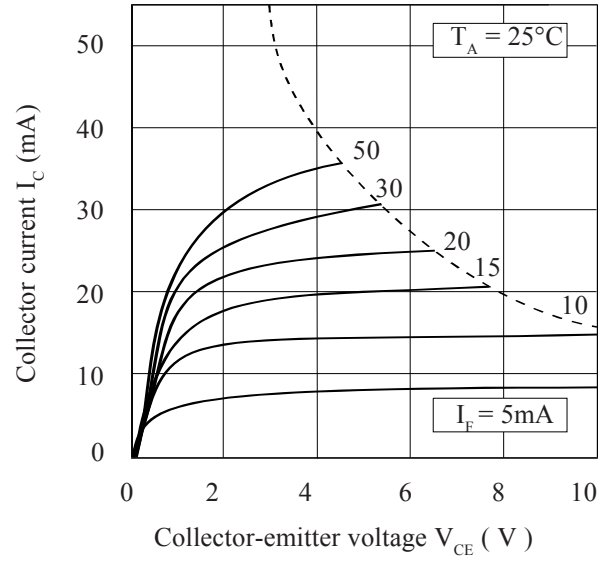


Forward Current vs. Ambient Temperature

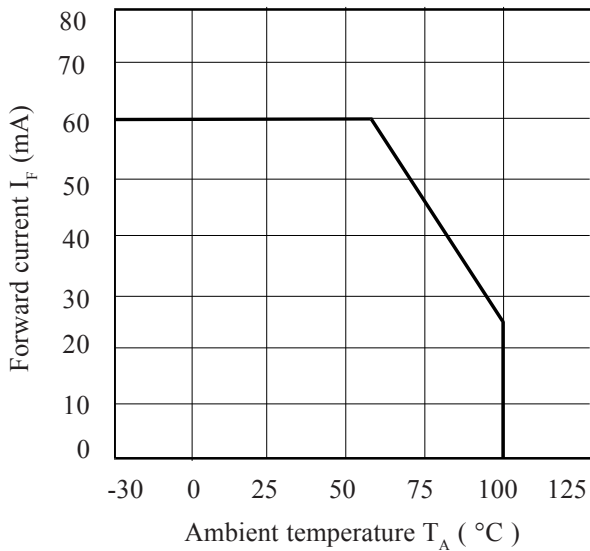


Current Transfer Ratio vs. Forward Current

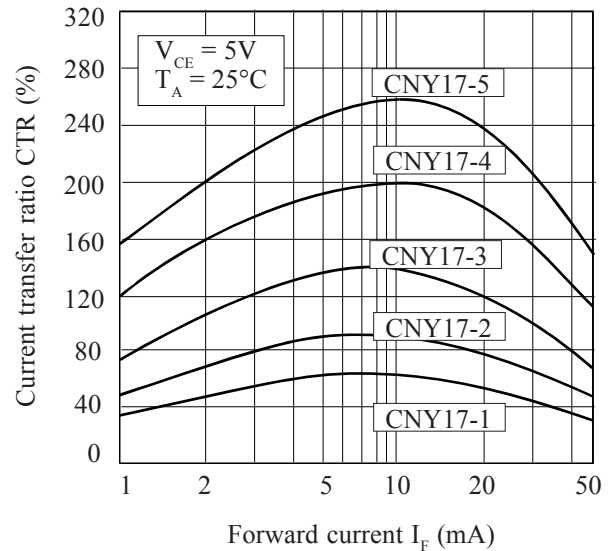

Relative Current Transfer Ratio vs. Ambient Temperature

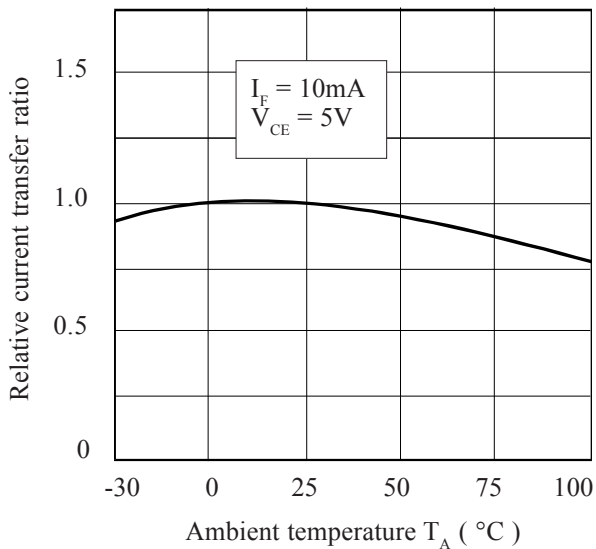

Collector-emitter Saturation Voltage vs. Ambient Temperature

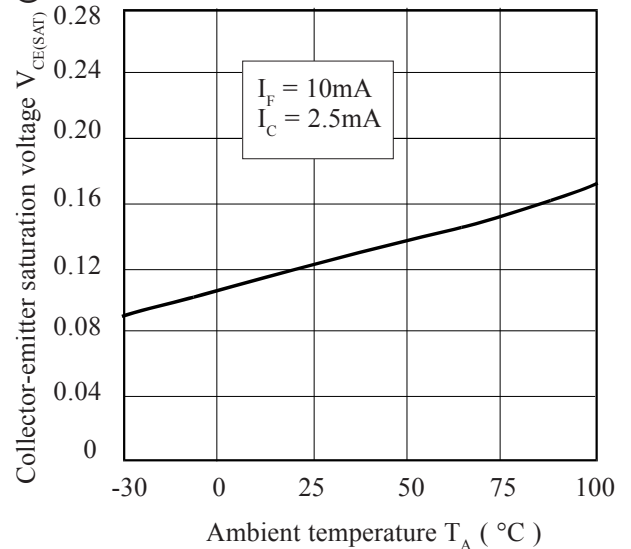

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photodiode Output Optocouplers](#) category:

Click to view products by [Isocom](#) manufacturer:

Other Similar products are found below :

[TLP590B\(C,F\)](#) [TLP7820\(A-LF4.E\(O](#) [LTV-244-GB-G](#) [LTV2301GB-V-G](#) [EL816S1\(C\)\(TU\)](#) [EL817S1\(C\)\(TU\)-VG](#) [GX357NC](#) [PC817B](#)
[PC817C](#) [LTV-341W-TA1-H](#) [LTV-176G](#) [LTV-1003-TP1-G](#) [LTV-247-G-RT](#) [PC817B-MS](#) [FOC-817C-F](#) [CYPS2501-1\(K\)](#)
[CYTLP2362\(TPD2\)](#) [OR-3H7C-TP-G-\(GK\)](#) [ORPC-817MC-F](#) [ORPC-817D-C](#) [ORPC-817SB-TP-F](#) [PS2801C-4-F3-A/M](#) [PC817B](#)
[TLP183\(YH-TPL,E\(T](#) [TLP183\(GRH-TPL,E\(T](#) [TLP183\(TPL,E\(T](#) [TLP184\(V4GBTL,SE\(T](#) [TLP785\(BLL-TP6,F\(C](#) [TLP293\(GRH-TPL,E\(T](#)
[TLP383\(D4GL-TR,E](#) [TLP185\(BLL-TL,SE\(T](#) [TLP2309\(TPL,E\(O](#) [TLP785\(BL-TP6,F\(C](#) [TLP185\(GRL-TL,SE\(T](#) [TLP785\(GR-TP6,F\(C](#)
[TLP183\(BL-TPL,E\(T](#) [TLP2398\(TPL,E\(T](#) [TLP127GB-S](#) [LTV-354T-A\(UMW\)](#) [6N136S\(UMW\)](#) [PC817B-S](#) [FOC-817C](#) [EL1018](#) [LTV-214-](#)
[TP1-AK-G](#) [LTV-316J-TP1](#) [PC817C-MS](#) [CYTLP181\(GR-TP\)](#) [CYPC357\(C-TR\)](#) [CYPC356\(B-TP\)](#) [CYPC357\(B-TP\)](#)