

MCT270, MCT271, MCT272, MCT273,
MCT274, MCT275, MCT276, MCT277



ISOCOM

COMPONENTS



OPTICALLY COUPLED ISOLATOR PHOTOTRANSISTOR OUTPUT

APPROVALS

- UL recognised, File No. E91231

DESCRIPTION


The MCT27_ series of optically coupled isolators consist of an infrared light emitting diode and NPN silicon photo transistor in a standard 6 pin dual in line plastic package.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High Isolation Voltage (5.3kV_{RMS}, 7.5kV_{PK})
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- DC motor controllers
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

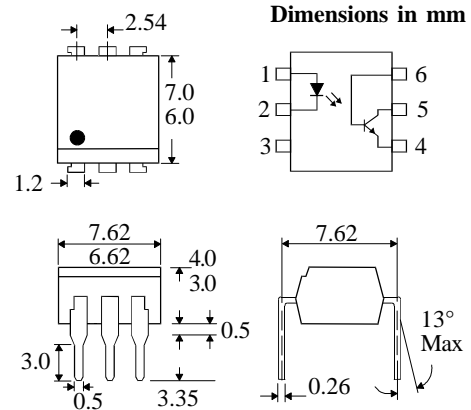

ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature _____ -55°C to + 150°C
 Operating Temperature _____ -55°C to + 100°C
 Lead Soldering Temperature
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

INPUT DIODE

Forward Current _____ 60mA
 Reverse Voltage _____ 6V
 Power Dissipation _____ 105mW


OUTPUT TRANSISTOR

Collector-emitter Voltage BV_{CEO} 30V
 (MCT275 only) BV_{CEO} 80V
 Collector-base Voltage BV_{CBO} 70V
 Emitter-base Voltage BV_{EBO} 5V
 Power Dissipation _____ 160mW


POWER DISSIPATION

Total Power Dissipation _____ 200mW
 (derate linearly 2.67mW/°C above 25°C)

OPTION SM SURFACE MOUNT



OPTION G



ISOCOM COMPONENTS LTD

Unit 25B, Park View Road West,
 Park View Industrial Estate, Brenda Road
 Hartlepool, Cleveland, TS25 1YD
 Tel: (01429) 863609 Fax :(01429) 863581

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

| PARAMETER | | MIN | TYP | MAX | UNITS | TEST CONDITION |
|------------|--|--------------------|-----|---------------|---------------|--|
| Input | Forward Voltage (V_F) | | 1.2 | 1.5 | V | $I_F = 20\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 3\text{V}$ |
| | Reverse Voltage (V_R) | 3 | | | V | |
| | Reverse Current (I_R) | | | 10 | μA | |
| Output | Collector-emitter Breakdown (BV_{CEO}) MCT27x (except MCT275) | 30 | | | V | $I_C = 1\text{mA}$ |
| | MCT275 (note 2) | 80 | | | V | |
| | Collector-base Breakdown (BV_{CBO}) | 70 | | | V | $I_C = 100\mu\text{A}$ |
| | Emitter-base Breakdown (BV_{EBO}) | 5 | | | V | $I_E = 100\mu\text{A}$ |
| | Collector-emitter Dark Current (I_{CEO}) | | | 50 | nA | $V_{CE} = 10\text{V}$ |
| Coupled | Current Transfer Ratio (CTR) | | | | | $10\text{mA } I_F, 10\text{V } V_{CE}$ |
| | MCT270 | 50 | | | % | |
| | MCT271 | 45 | 90 | | % | |
| | MCT272 | 75 | 150 | | % | |
| | MCT273 | 125 | 250 | | % | |
| | MCT274 | 225 | 400 | | % | |
| | MCT275 | 70 | 210 | | % | |
| | MCT276 | 15 | 60 | | % | |
| | MCT277 | 100 | | | % | |
| | Collector-emitter Saturation Voltage $V_{CE(SAT)}$ | | | 0.4 | V | $16\text{mA } I_F, 2\text{mA } I_C$ |
| | Input to Output Isolation Voltage V_{ISO} | 5300 | | | V_{RMS} | See note 1 |
| | | 7500 | | | V_{PK} | See note 1 |
| | Input-output Isolation Resistance R_{ISO} | 5×10^{10} | | | Ω | $V_{IO} = 500\text{V}$ (note 1) |
| | Switching Time t_{ON}, t_{OFF} | | | | | $V_{CC} = 5\text{V}, R_L = 100\Omega,$ $I_C = 2\text{mA}$, (fig 1) |
| | MCT270,272 | | 10 | | μs | |
| | MCT271 | | 7 | | μs | |
| MCT273 | | 20 | | μs | | |
| MCT274 | | 25 | | μs | | |
| MCT275,277 | | 15 | | μs | | |
| MCT276 | | 3.5 | | μs | | |

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.



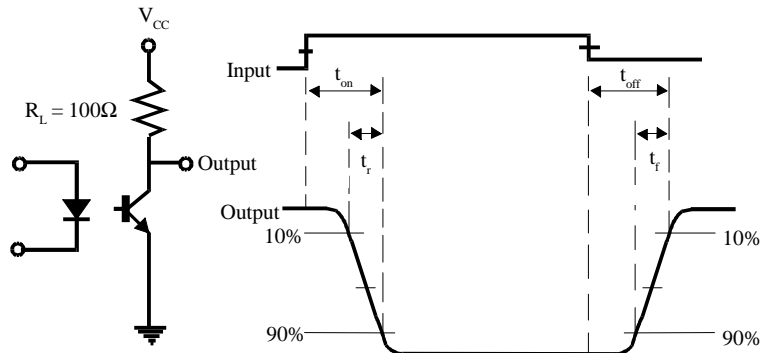


FIG 1


Collector Power Dissipation vs. Ambient Temperature

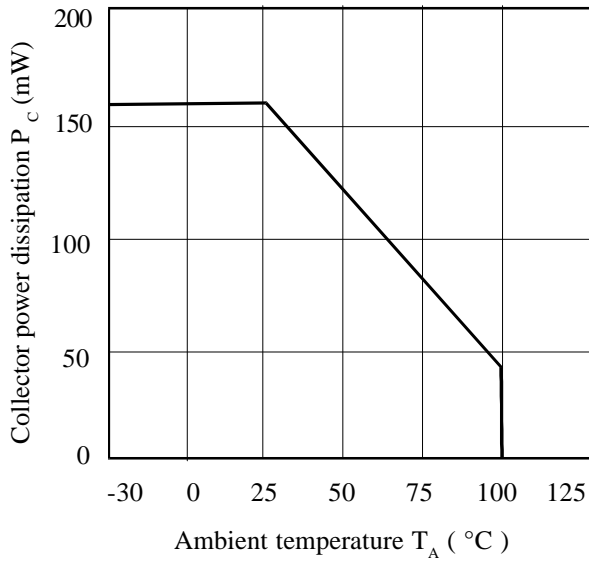


Relative Current Transfer Ratio vs. Ambient Temperature

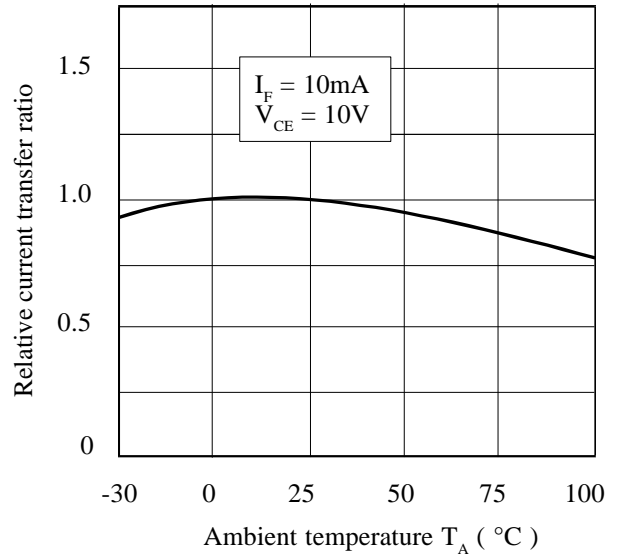


Forward Current vs. Ambient Temperature

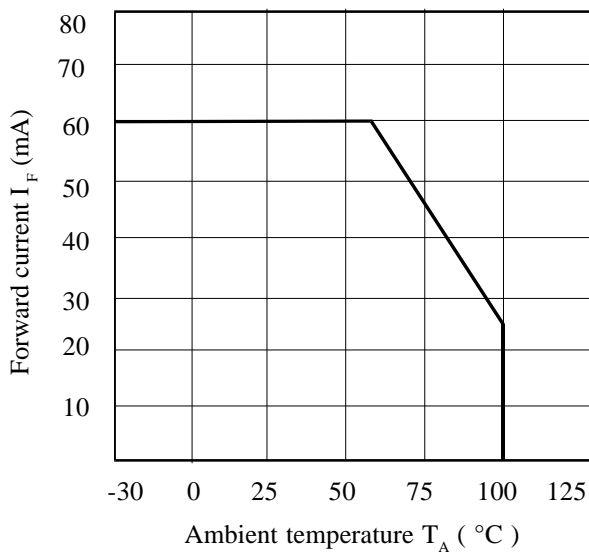


Relative Current Transfer Ratio vs. Forward Current

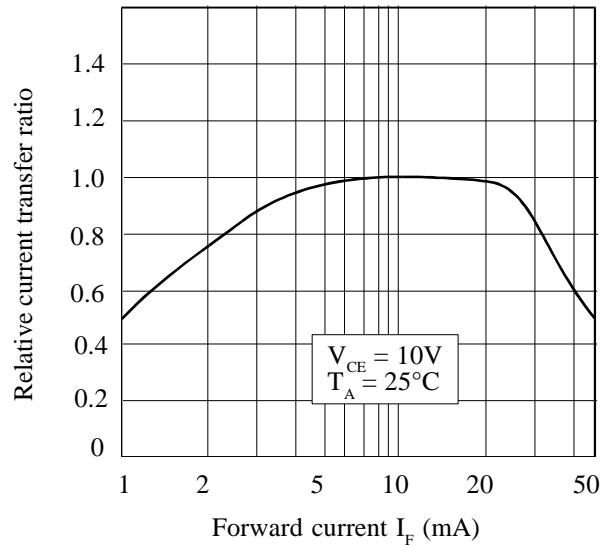

Collector Current vs. Collector-emitter Voltage (Normalised to MCT270,273,275,277)

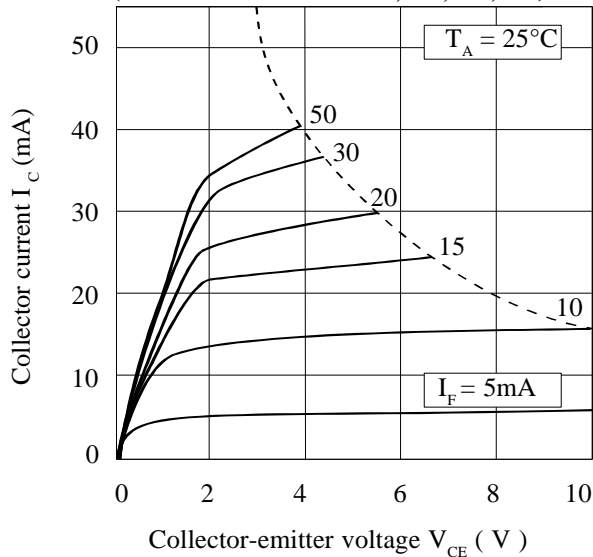

Collector-emitter Saturation Voltage vs. Ambient Temperature

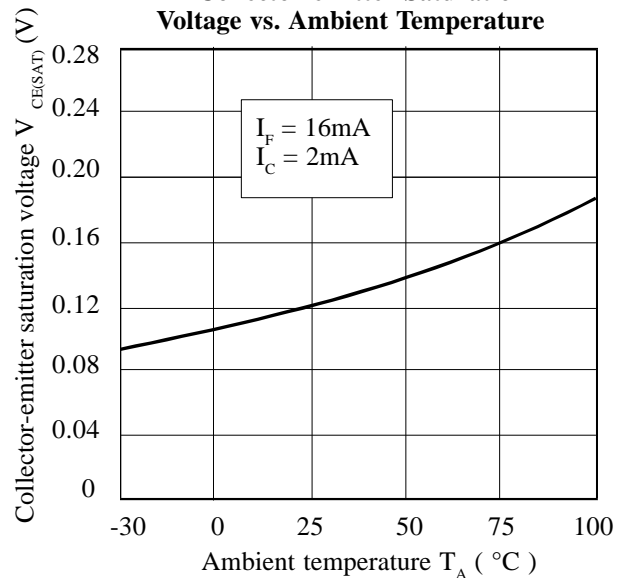

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [High Speed Optocouplers](#) category:

Click to view products by [Isocom](#) manufacturer:

Other Similar products are found below :

[6N136F](#) [PS8502L2-AX](#) [ACNW261L-000E](#) [ACPL-344JT-000E](#) [ACPL-K49T-500E](#) [ACPL-K75T-000E](#) [ACPL-W21L-560E](#) [ACPL-K44T-500E](#) [TLP187\(TPL,E\(T](#) [TLP2601\(TP1,F\)](#) [610737H](#) [6N137A-X001](#) [6N137A-X017T](#) [6N139-X007T](#) [HCPL2630M](#) [HCPL2731SM](#) [TLP555\(F\)](#) [HCPL2630SM](#) [PS2841-4A-F3-AX](#) [PS9817A-1-F3-AX](#) [PS9821-2-F3-AX](#) [ORPC-817D](#) [ORPC-817M/C](#) [ORPC-817M/B](#) [PT17-51C/L129\(BIN2\)](#) [TLP521-4GBSM](#) [UMW817C](#) [6N137S1\(TA\)](#) [TLP521GB](#) [TLP521GB-S](#) [PS2501](#) [PS2501-S](#) [TLP785GB](#) [TLP785GB-S](#) [LTV-214-G](#) [TLP2766A\(E](#) [TLP2766A\(LF4,E](#) [LCR-0202](#) [EL814S1\(TA\)-V](#) [PC817X4NSZ2B](#) [CYPC817](#) [OR-MOC3023](#) [TLP267J\(TPL,E\(T](#) [TLP109\(TPL,E\(O](#) [EL2514S1\(TU\)\(CLW\)-G](#) [EL816S2\(C\)\(TU\)-F](#) [EL814S\(A\)\(TU\)](#) [TLP281-4](#) [MOC3023M](#) [ACPL-K49T-060E](#)