

PS2505-1X, PS2505-2X, PS2505-4X  
 PS2505-1, PS2505-2, PS2505-4



**HIGH DENSITY A.C. INPUT  
 PHOTOTRANSISTOR OPTICALLY  
 COUPLED ISOLATORS**

**APPROVALS**

- UL recognised, File No. E91231  
 Package code "EE "

**'X' SPECIFICATION APPROVALS**

- VDE 0884 in 3 available lead form : -  
 - STD  
 - G form  
 - SMD approved to CECC 00802
- Certified to EN60950 by  
 Nemko - Certificate No. P01102465

**DESCRIPTION**

The PS2505-1, PS2505-2, PS2505-4 series of optically coupled isolators consist of two infrared light emitting diodes connected in inverse parallel and NPN silicon photo transistors in space efficient dual in line plastic packages.


**FEATURES**

- Options :-  
 10mm lead spread - add G after part no.  
 Surface mount - add SM after part no.  
 Tape&reel - add SMT&R after part no.
- High Isolation Voltage ( $5.3kV_{RMS}, 7.5kV_{PK}$ )
- AC or polarity insensitive input
- All electrical parameters 100% tested
- Custom electrical selections available




**APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Telephone sets, Telephone exchangers
- Signal transmission between systems of different potentials and impedances





**PS2505-1X  
 PS2505-1**







**Dimensions in mm**




**PS2505-2X  
 PS2505-2**




**PS2505-4X  
 PS2505-4**

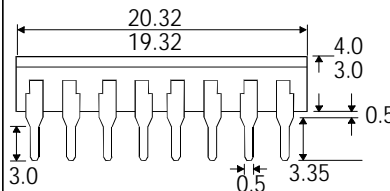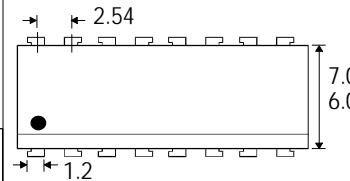

**OPTION SM  
 SURFACE MOUNT**



**OPTION G**



**ISOCOM COMPONENTS LTD**

Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1YD  
 Tel: (01429) 863609 Fax :(01429) 863581

**ABSOLUTE MAXIMUM RATINGS**  
(25°C unless otherwise specified)

Storage Temperature ————— -55°C to +125°C  
 Operating Temperature ————— -30°C to +100°C  
 Lead Soldering Temperature  
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

**INPUT DIODE**

Forward Current ————— ±50mA  
 Power Dissipation ————— 70mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage  $BV_{CEO}$  ——— 80V  
 Emitter-collector Voltage  $BV_{ECO}$  ——— 6V  
 Collector Current ————— 50mA  
 Power Dissipation ————— 150mW

**POWER DISSIPATION**

Total Power Dissipation ————— 200mW  
 (derate linearly 2.67mW/°C above 25°C)

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ )		1.2	1.4	V	$I_F = \pm 10\text{mA}$
Output	Collector-emitter Breakdown ( $BV_{CEO}$ ) ( Note 2 )	80			V	$I_C = 1\text{mA}$
	Emitter-collector Breakdown ( $BV_{ECO}$ )	6			V	$I_E = 100\mu\text{A}$
	Collector-emitter Dark Current ( $I_{CEO}$ )			100	nA	$V_{CE} = 20\text{V}$
Coupled	Current Transfer Ratio (CTR) (Note 2) PS2505-1, PS2505-2, PS2505-4	80		600	%	$\pm 5\text{mA} I_F, 5\text{V } V_{CE}$
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$			0.3	V	$\pm 10\text{mA} I_F, 2\text{mA} I_C$
	Input to Output Isolation Voltage $V_{ISO}$	5300 7500			$V_{RMS}$ $V_{PK}$	See note 1 See note 1
	Input-output Isolation Resistance $R_{ISO}$	$5 \times 10^{10}$			$\Omega$	$V_{IO} = 500\text{V}$ (note 1)
	Output Rise Time $t_r$ Output Fall Time $t_f$		4 3		$\mu\text{s}$ $\mu\text{s}$	$V_{CE} = 2\text{V},$ $I_C = 2\text{mA}, R_L = 100\Omega$


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory


**Collector Power Dissipation vs. Ambient Temperature**




**Collector-emitter Saturation Voltage vs. Forward Current**

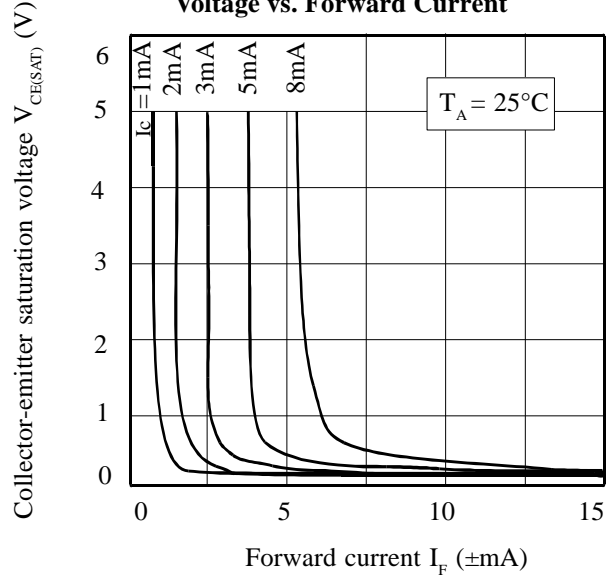


**Forward Current vs. Ambient Temperature**

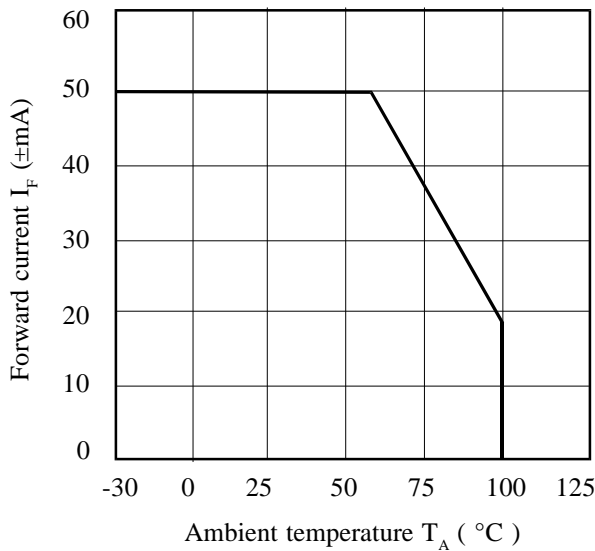


**Collector Current vs. Collector-emitter Voltage**

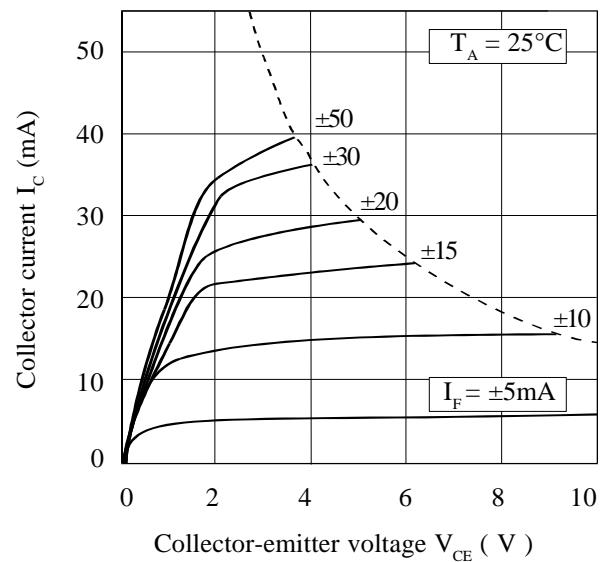

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

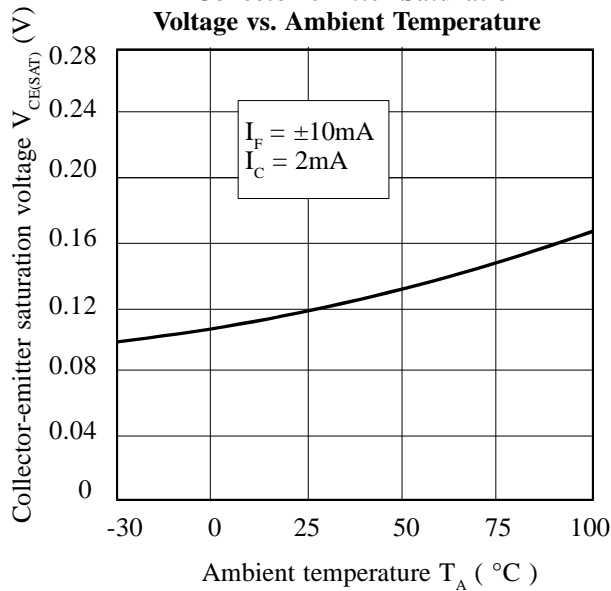

**Current Transfer Ratio vs. Forward Current**

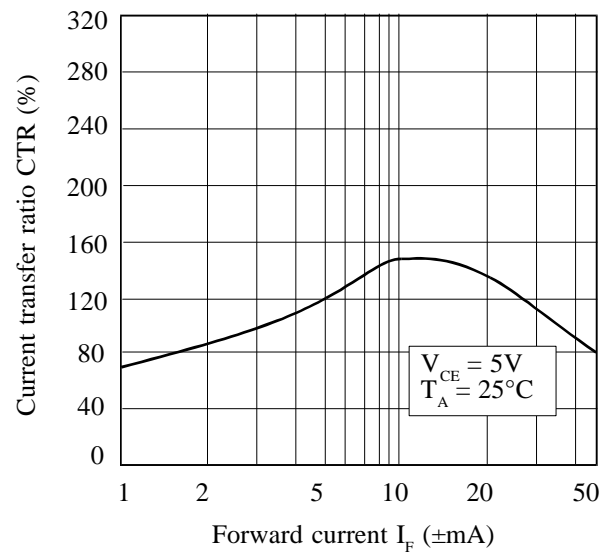

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [isocom](#) manufacturer:*

Other Similar products are found below :

[SFH615A-2SM](#) [H11A1](#) [MOC3021M](#) [ISD74X](#) [IS60SM](#) [ICPL4503SM](#) [PS2505-4](#) [MOCD207](#) [IS60SMT&R](#) [MOC3083](#) [MOC3043X](#)  
[MOC3081M](#) [ICPL2531SM](#) [PS2502-2](#) [IS341W](#) [SFH617A-4X](#) [MOC3043M](#) [PS2502-2SM](#) [ILQ74X](#) [ICPL2601](#) [IS181C](#) [PS2502-4SM](#)  
[ICPL2530SM](#) [MOC3021XSM](#) [MOC3041SM](#) [ISQ74X](#) [CNY17-2XSM](#) [CNY17-1XSM](#) [MOC3023M](#) [H11AA1XSM](#) [ISQ2X](#) [PS2505-4SM](#)  
[TIL199](#) [4N32FSM](#) [MOC3020X](#) [H21A3](#) [IS281C](#) [MOC3061X](#) [ISP817B](#) [MOC3041M](#) [ILQ1XSM](#) [4N25X](#) [MOC3022X](#) [MOC3021X](#) [CNY17-3X](#) [ISP521-1XSM](#) [ISP06SM](#) [PS2805-1](#) [TLP321-4XGB](#) [ICPL2631](#)