

TIL197, TIL198, TIL199  
 TIL197A, TIL198A, TIL199A  
 TIL197B, TIL198B, TIL199B



**ISOCOM**  
 COMPONENTS



**HIGH DENSITY MOUNTING  
 PHOTODARLINGTON OPTICALLY  
 COUPLED ISOLATORS**

**APPROVALS**

- UL recognised, File No. E91231

**'X' SPECIFICATION APPROVALS**

- VDE 0884 approval pending
- Certified to EN60950 by the following Test Bodies :-  
 Nemko - Certificate No. P96102022  
 Fimko - Registration No. 192313-01..25  
 Semko - Reference No. 9639052 01  
 Demko - Reference No. 305969

**DESCRIPTION**

The TIL197, TIL198, TIL199 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photo darlington in space efficient dual in line plastic packages. The standard parts TIL197, TIL198, TIL199 are tested for a CTR of 500% minimum. Parts with the suffix A or B are tested for a CTR of 1000 and 1500% minimum respectively.


**FEATURES**

- Options :-  
 10mm lead spread - add G after part no.  
 Surface mount - add SM after part no.  
 Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio (500%min)
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- All electrical parameters 100% tested
- Custom electrical selections available


**APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances


**OPTION SM  
 SURFACE MOUNT**




**OPTION G**





**TIL197  
 TIL197A  
 TIL197B**











**Dimensions in mm**



**TIL198  
 TIL198A  
 TIL198B**



**TIL199  
 TIL199A  
 TIL199B**

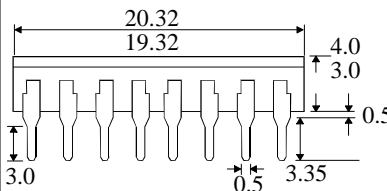

**ISOCOM COMPONENTS LTD**  
 Unit 25B, Park View Road West,  
 Park View Industrial Estate, Brenda Road  
 Hartlepool, Cleveland, TS25 1YD  
 Tel: (01429) 863609 Fax :(01429) 863581

**ABSOLUTE MAXIMUM RATINGS**  
(25°C unless otherwise specified)

Storage Temperature \_\_\_\_\_ -55°C to + 125°C  
 Operating Temperature \_\_\_\_\_ -55°C to + 100°C  
 Lead Soldering Temperature  
 (1/16 inch (1.6mm) from case for 10 secs) 260°C

**INPUT DIODE**

Forward Current \_\_\_\_\_ 50mA  
 Reverse Voltage \_\_\_\_\_ 6V  
 Power Dissipation \_\_\_\_\_ 70mW

**OUTPUT TRANSISTOR**

Collector-emitter Voltage  $BV_{CEO}$  \_\_\_\_\_ 35V  
 Emitter-collector Voltage  $BV_{ECO}$  \_\_\_\_\_ 6V  
 Power Dissipation \_\_\_\_\_ 150mW

**POWER DISSIPATION**

Total Power Dissipation \_\_\_\_\_ 200mW  
 (derate linearly 2.67mW/°C above 25°C)


**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION	
Input	Forward Voltage ( $V_F$ )		1.2	1.4	V	$I_F = 20\text{mA}$ $I_R = 10\mu\text{A}$ $V_R = 5\text{V}$	
	Reverse Voltage ( $V_R$ )	5			V		
	Reverse Current ( $I_R$ )			10	$\mu\text{A}$		
Output	Collector-emitter Breakdown ( $BV_{CEO}$ ) ( Note 2 )	35			V	$I_C = 0.5\text{mA}$ $I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$	
	Emitter-collector Breakdown ( $BV_{ECO}$ )	6			V		
	Collector-emitter Dark Current ( $I_{CEO}$ )			100	nA		
Coupled	Current Transfer Ratio (CTR) (Note 2) TIL197, TIL198, TIL199 TIL197A, TIL198A, TIL199A TIL197B, TIL198B, TIL199B	500 1000 1500		7500 7500 7500		$2\text{mA } I_F, 1\text{V } V_{CE}$ $2\text{mA } I_F, 1\text{V } V_{CE}$ $2\text{mA } I_F, 1\text{V } V_{CE}$	
	Collector-emitter Saturation Voltage $V_{CE(SAT)}$		0.8	1.0	V		
	Input to Output Isolation Voltage $V_{ISO}$	5300 7500			$V_{RMS}$ $V_{PK}$		See note 1 See note 1
	Input-output Isolation Resistance $R_{ISO}$	$5 \times 10^{10}$			$\Omega$		$V_{IO} = 500\text{V}$ (note 1)
	Output Rise Time tr			100	$\mu\text{s}$		$V_{CC} = 10\text{V}$ , $I_C = 10\text{mA}$ , $R_L = 100\Omega$
	Output Fall Time tf			100	$\mu\text{s}$		


Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.


**Collector Power Dissipation vs. Ambient Temperature**

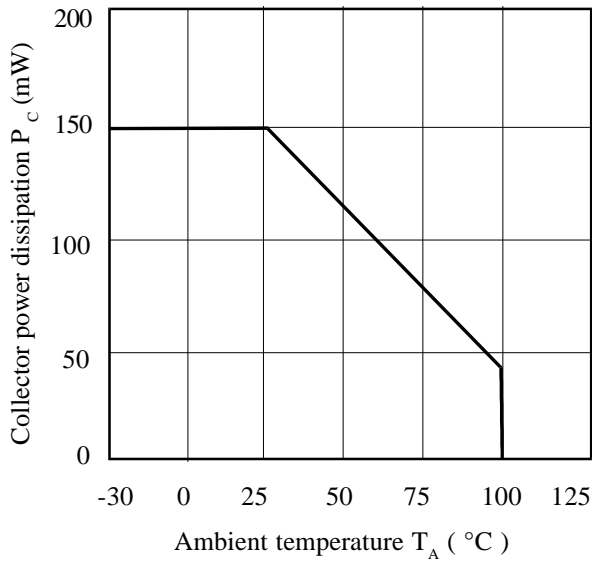


**Collector-emitter Saturation Voltage vs. Forward Current**

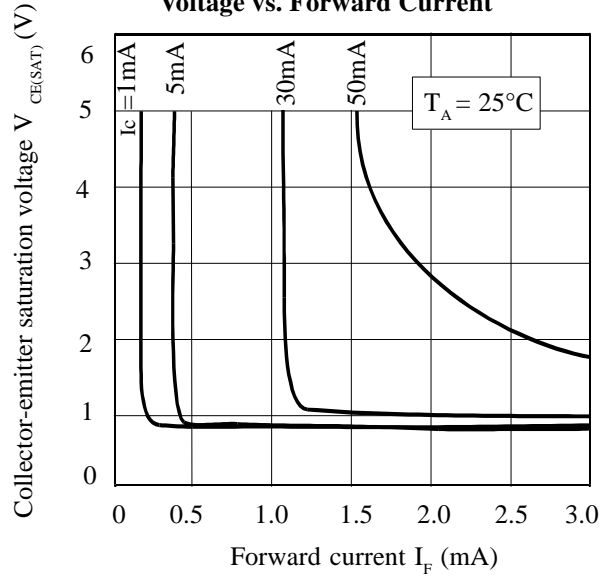


**Forward Current vs. Ambient Temperature**

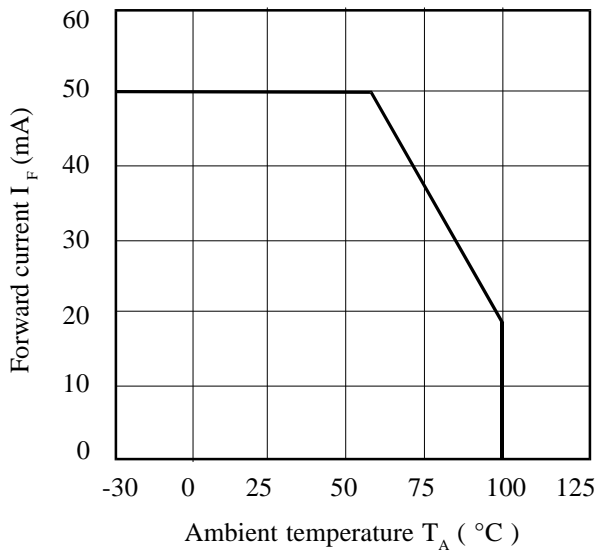


**Collector Current vs. Collector-emitter Voltage**

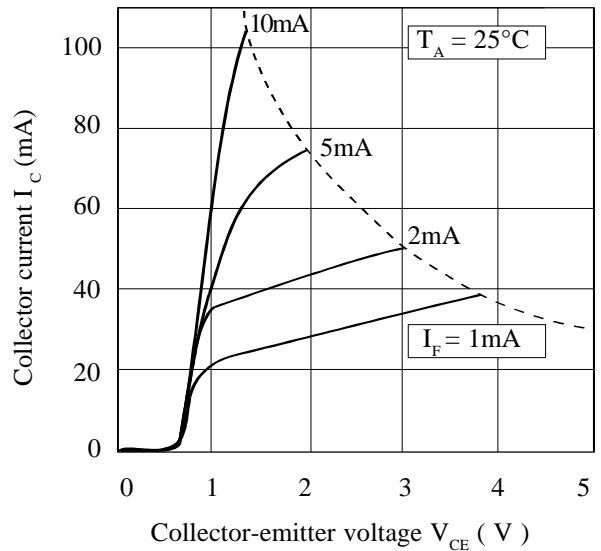

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

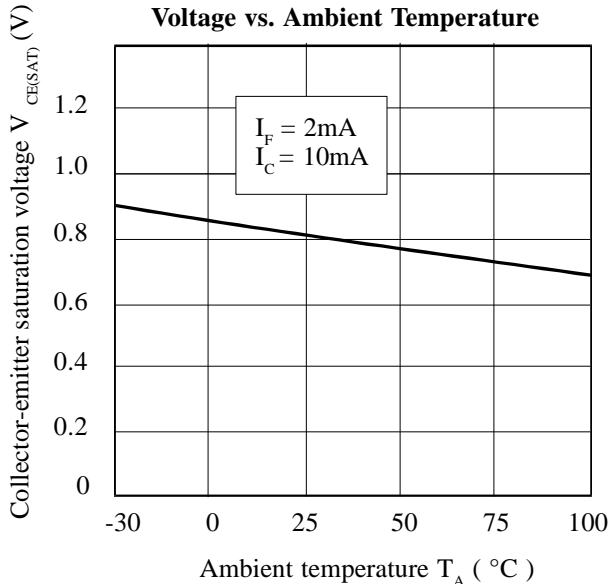

**Relative Current Transfer Ratio vs. Ambient Temperature**

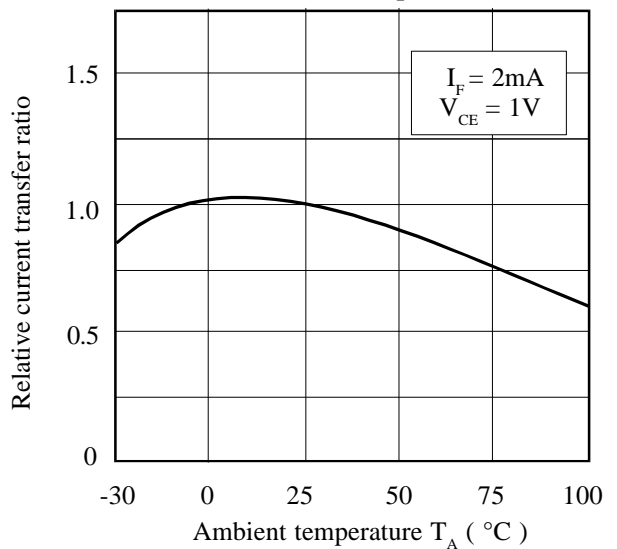

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [High Speed Optocouplers](#) category:*

*Click to view products by [Isocom](#) manufacturer:*

Other Similar products are found below :

[6N136F](#) [PS8502L2-AX](#) [ACNW261L-000E](#) [ACPL-344JT-000E](#) [ACPL-K49T-500E](#) [ACPL-K75T-000E](#) [ACPL-W21L-560E](#) [ACPL-K44T-500E](#) [TLP187\(TPL,E\(T](#) [TLP2601\(TP1,F\)](#) [610737H](#) [6N137A-X001](#) [6N137A-X017T](#) [6N139-X007T](#) [HCPL2630M](#) [HCPL2731SM](#) [TLP555\(F\)](#) [HCPL2630SM](#) [PS2841-4A-F3-AX](#) [PS9817A-1-F3-AX](#) [PS9821-2-F3-AX](#) [ORPC-817D](#) [ORPC-817M/C](#) [ORPC-817M/B](#) [PT17-51C/L129\(BIN2\)](#) [TLP521-4GBSM](#) [UMW817C](#) [6N137S1\(TA\)](#) [TLP521GB](#) [TLP521GB-S](#) [PS2501](#) [PS2501-S](#) [TLP785GB](#) [TLP785GB-S](#) [LTV-214-G](#) [TLP2766A\(E](#) [TLP2766A\(LF4,E](#) [LCR-0202](#) [EL814S1\(TA\)-V](#) [PC817X4NSZ2B](#) [CYPC817](#) [OR-MOC3023](#) [TLP267J\(TPL,E\(T](#) [TLP109\(TPL,E\(O](#) [EL2514S1\(TU\)\(CLW\)-G](#) [EL816S2\(C\)\(TU\)-F](#) [TLP281-4](#) [MOC3023M](#) [ACPL-K49T-060E](#) [ACPL-K75T-500E](#)