

cannon

# CCS 1 and CCS 2 DC Fast Charging Connectors



ITT

# CCS 1 and CCS 2 DC Fast Charging Connectors

ITT Cannon's Fast Charging connector series is a flexible, durable, and high power solution available in fully certified CCS 1 and CCS 2 variants.

This uncooled connector is available with various amperage, and cable length options, ensuring that it is ideal for a wide variety of customer applications. It utilizes the robust and proven handle design of our HPC solution and features our ultra-reliable and fully proven contact system.

With more than a decade of EV experience and a global range of AC and DC charging solutions from 10A up to a continuous 500A, ITT Cannon can support your requirements – whatever the application.



CCS 1



CCS 2

## Key Features:

- Utilizes the common handle design for ITT DC connectors
- Ultra-reliable contact design for the harshest environments
- Various amperage and cable length options
- Complements existing ITT Cannon AC and HPC range to deliver a one-stop-shop

## The ITT Cannon Difference:

- Global capabilities and local support
- Proven EV application expertise
- Over a century of interconnect leadership
- A committed innovator and business partner

## About ITT

ITT is a diversified leading manufacturer of highly engineered critical components and customized technology solutions for the energy, transportation and industrial markets. Building on its heritage of innovation, ITT partners with its customers to deliver enduring solutions to the key industries that underpin our modern way of life. Founded in 1920, ITT is headquartered in White Plains, N.Y., with employees in more than 35 countries and sales in a total of approximately 125 countries. For more information visit [www.itt.com](http://www.itt.com)

# Technical Overview



CCS 1



CCS 2

Environmental	
Ambient temperature (operation)	-35°C to +50°C
Max. altitude	5000m (above sea level)
Degree of protection	3R

Electrical	
Maximum charging power	150kW
Rated current of power contacts	150A
Rated voltage for power contacts	1000V
Material surface of contacts	Ag

Standards/Regulations	
	SAE J1772

Sensors	
Temperature Sensor	One for each power contact
Type of sensor	Pt 1000

Environmental	
Ambient temperature (operation)	-30°C to +50°C
Max. altitude	5000m (above sea level)
Degree of protection	IP 54 mated

Electrical	
Maximum charging power	200kW
Rated current of power contacts	60A, 125A, 200A
Rated voltage for power contacts	1000V
Material surface of contacts	Ag


Standards/Regulations	
	DIN EN 62196-3

Sensors	
Temperature Sensor	One for each power contact
Type of sensor	Pt 1000

The innovative connector design utilizes two canted coil springs for contact redundancy which creates multiple contact zones and requires minimal mating forces.

# CCS 2

## Fast Charging Dimension Drawings

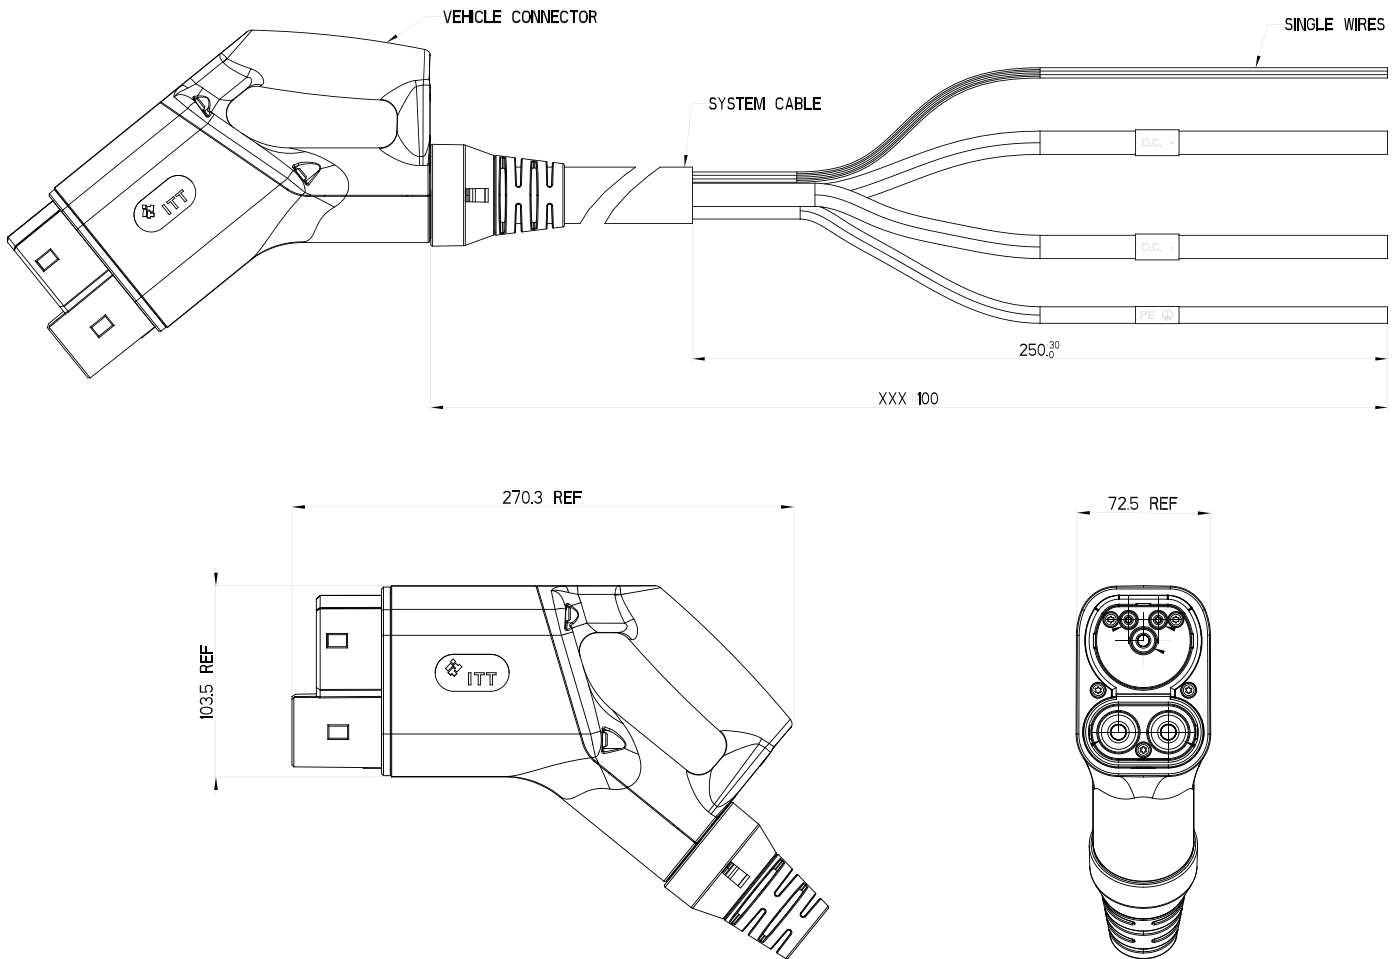

All dimensions in mm

### How to Order



Type

Series

Amperage

System cable length in dm (3 digits)

Modification code\* (only if applicable)

\*Contact factory

#### Example Part number explanation

CCS2-FC-200-050 = CCS2, Fast Charging, 200A, 5.0m system cable

#### Explanation


Type	Series	Amperage	System cable length
CCS2 (EU market)	FC - Fast Charging	60 Amps / 125 Amps / 200 Amps	XXX - Length in decimeters (dm)

Standard cable lengths are 4m, 5m and 6m

Specifications and dimensions subject to change

# CCS 1

## Fast Charging Dimension Drawings

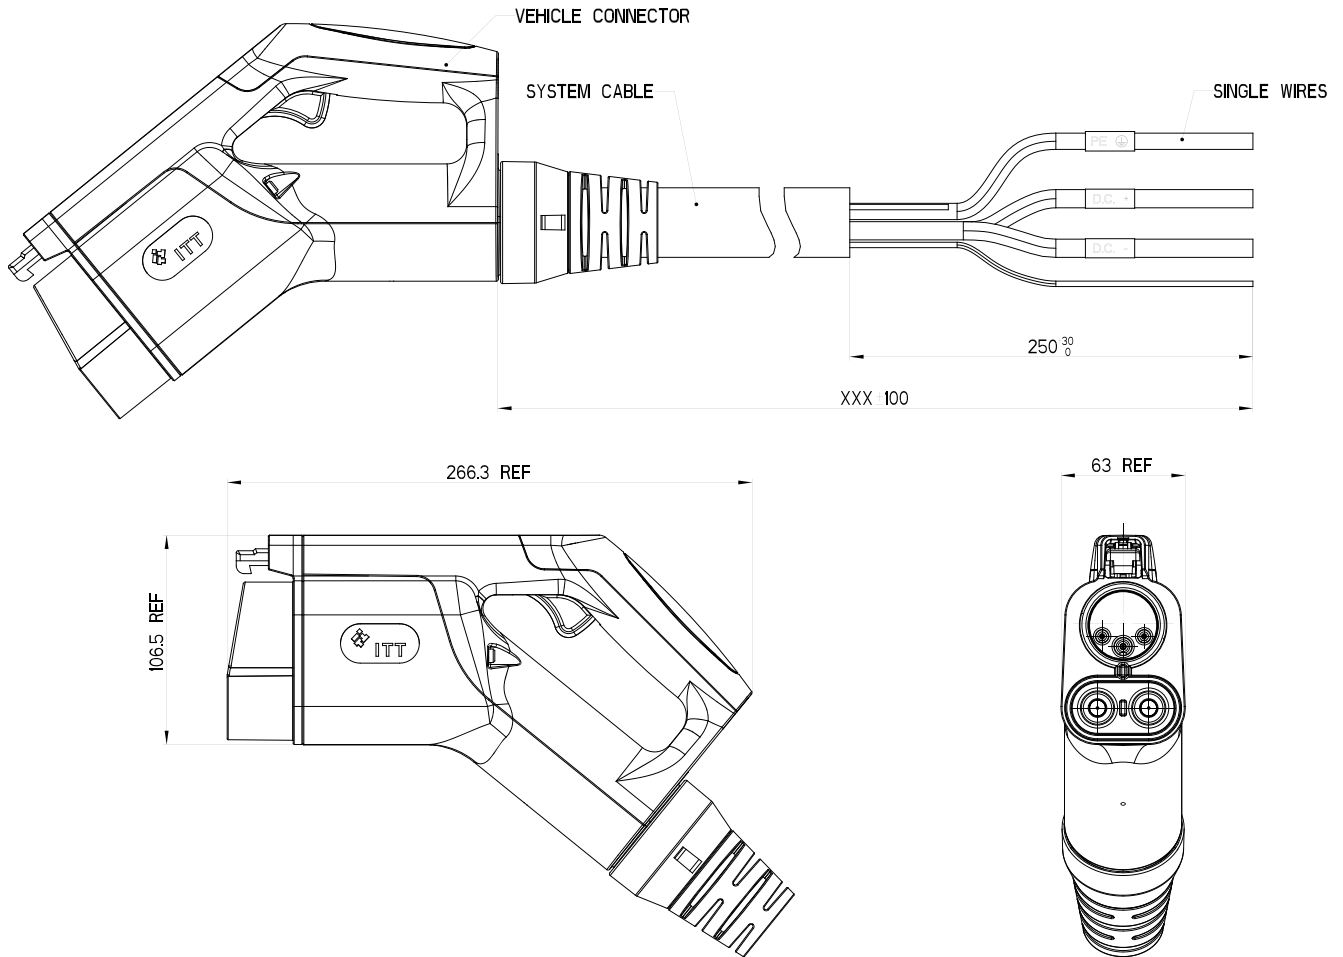

All dimensions in mm

### How to Order

CCS1-

FC-

150-

050

MMM

Type

Series

Amperage

System cable length in dm (3 digits)

Modification code\* (only if applicable)

\*Contact factory

#### Example Part number explanation

CCS1-FC-150-050 = CCS1, Fast Charging, 150A, 5.0m system cable

#### Explanation

Type	Series	Amperage	System cable length
CCS1 (US market)	FC - Fast Charging	150 Amps	XXX - Length in decimeters (dm)

Standard cable lengths are 4m, 5m and 6m

Specifications and dimensions subject to change


Connect with your ITT Cannon representative today  
or visit us at [www.ittcannon.com](http://www.ittcannon.com)

## Connect with the experts

ITT Cannon is a world leader in the design and manufacture of highly engineered solutions for global e-mobility markets.



Connect with your ITT Cannon representative today or visit us at [www.ittcannon.com](http://www.ittcannon.com)

Follow us 

**CHINA—Shenzhen City**  
+86.755.2726.7888

**GERMANY—Weinstadt**  
+49.7151.699.0

**ITALY—Lainate**  
+39.02938721

**MEXICO—Nogales**  
+52.631.311005

**UK—Basingstoke**  
+44.1256.347400

**FRANCE**  
+33.1.60.04.93.93

**HONG KONG**  
+852.2732.2720

**JAPAN—Kanagawa**  
+81.462.57.2010

**SINGAPORE**  
+65 66974205

**USA—Irvine, CA**  
+1.800.854.3028

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EV Charging Cables](#) category:*

*Click to view products by [ITT](#) manufacturer:*

Other Similar products are found below :

[1628379](#) [1627133](#) [1627355](#) [1623508](#) [35054781](#) [35268956](#) [35054784](#) [35054782](#) [35054780](#) [35054788](#) [35058252](#) [73422795060](#)  
[73422795030](#) [ECCV6323-050S0A](#) [ECCV3223-050S0A](#) [ECCV3221-050S0A](#) [J2CE8021-20S0A](#) [J2CE8021-25S0A](#) [J2CE8021-15S0A](#)  
[J2CE3221-25L0A](#) [J2CE4021-25L0A](#) [J2CE4821-15L0A](#) [J2CE4821-20L0A](#) [J2CE4021-15L0A](#) [J2CE4021-20L0A](#) [J2CE3221-20L0A](#)  
[J2CE3221-15L0A](#) [J2CE4821-20L0A-179](#) [J2CE3221-25L0A-179](#) [J2CE4021-20L0A-179](#) [J2CE4021-25L0A-179](#) [J2CE4021-15L0A-179](#)  
[J2CE4821-15L0A-179](#) [J2CE3221-15L0A-179](#) [J2CE3221-20L0A-179](#) [1013994](#) [1018701](#) [1031379](#) [1051695](#) [1085631](#) [1085641](#) [1089931](#)  
[1085642](#) [1085658](#) [1101121](#) [1101122](#) [1085638](#) [1095764](#) [1106966](#) [1107049](#)