



ITT

Interconnect Solutions
Cannon, VEAM, BIW

Assuring **100% reliability**
in over **5,000** missile launches
to our armed forces and global allies



Engineered for life


Micro-D PCB - .050" Contact Spacing MDM-PCB



MDM-PCB connectors are designed for use with flex circuitry, flat cable and printed circuit boards or multi-layer boards. They use the standard MDM metal shell and provide high density and high reliability in board-to-board, board-to-cable and cable-to-cable applications.

MDM-PCB connectors are available in 8 shell sizes with 9 to 100 contacts. Terminations may be straight (BS) or at 90° right angle (BR, CBR) board thickness. Jackpost mounting for use with locking hardware is also available.

How to Order - MDM-PCB Series

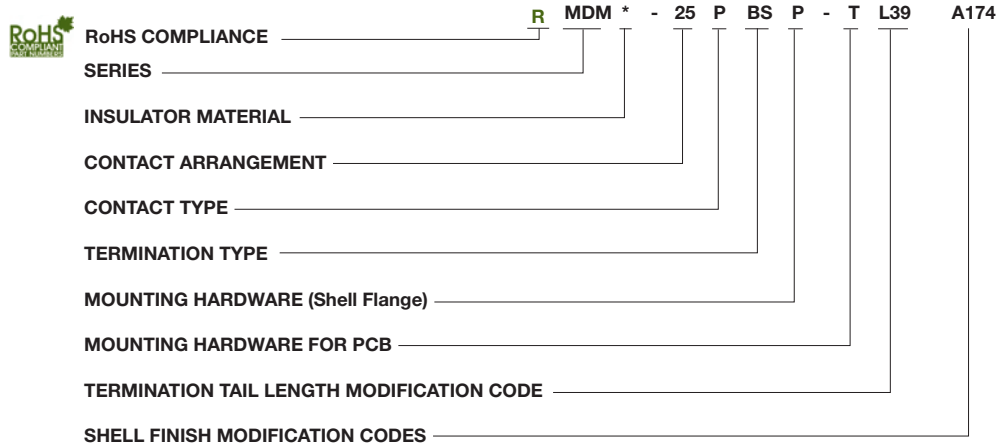

- SERIES**
MDM - Micro "D" Metal Shell
- INSULATOR MATERIAL**
Liquid Crystal Polymer (LCP)
- CONTACT ARRANGEMENT**
9, 15, 21, 25, 31, 37, 51, and 100
- CONTACT TYPE**
P - Pin (Plug)
S - Socket (Receptacle)

- TERMINATION TYPE**
BS - Straight PCB Termination
BR - Right Angle PCB Termination
CBR - Right Angle Narrow Profile PCB Terminations
- MOUNTING HARDWARE (Shell Flange)**
P - Jackposts
M7 - Jackposts
M83513/5-07 (Sizes 9-51)
M17 - Jackposts
M83513/5-17 (Size 100)
No letter - none
- MOUNTING HARDWARE FOR PCB**
T - Threaded Insert
#2-56 Thd for Shell Sizes 9 thru 51
#4-40 Thd for Shell Size 100
No letter - none

- TERMINATION TAIL LENGTH MODIFICATION CODE**
None - .109 (2.77) ±.015 (0.38) Standard
L61 - .125 (3.18)
L56 - .150 (3.81)
L57 - .190 (4.83)
L39 - .250 (6.35)
L58 - .375 (9.52)

- SHELL FINISH MODIFICATION CODES**
None - Yellow Chromate/Cadmium over Nickel
A174 - Electroless Nickel
A172 - Gold over Nickel
A141 - Irridite/Alodine
A30 - Black Anodize

(For special modification codes, consult customer service.)

NOTE: Back molding material – Epoxy Hysol #MG40FS




Microminiature



Dimensions shown in inches (mm)
Specifications and dimensions subject to change

Micro-D PCB - .050" Contact Spacing MDM-PCB


BS (Board Straight) Series

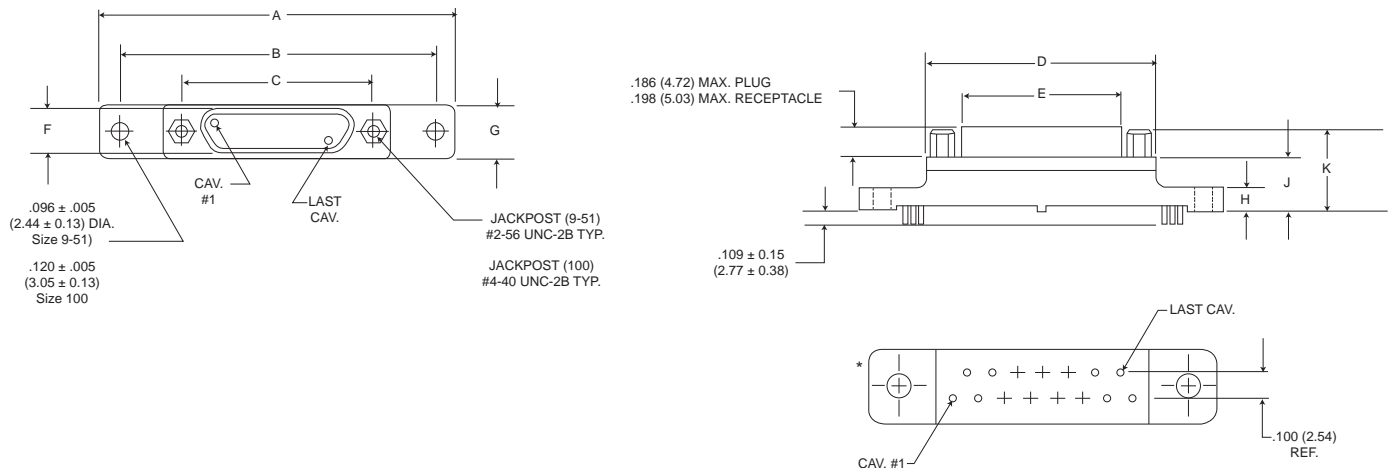

PCB Termination Arrangements* (Viewed from PCB solder side)

Identification number shown for plug connector, use reverse order for socket connector.

NOTE: Dimensions shown are for reference only-consult factory for final design dimensions.

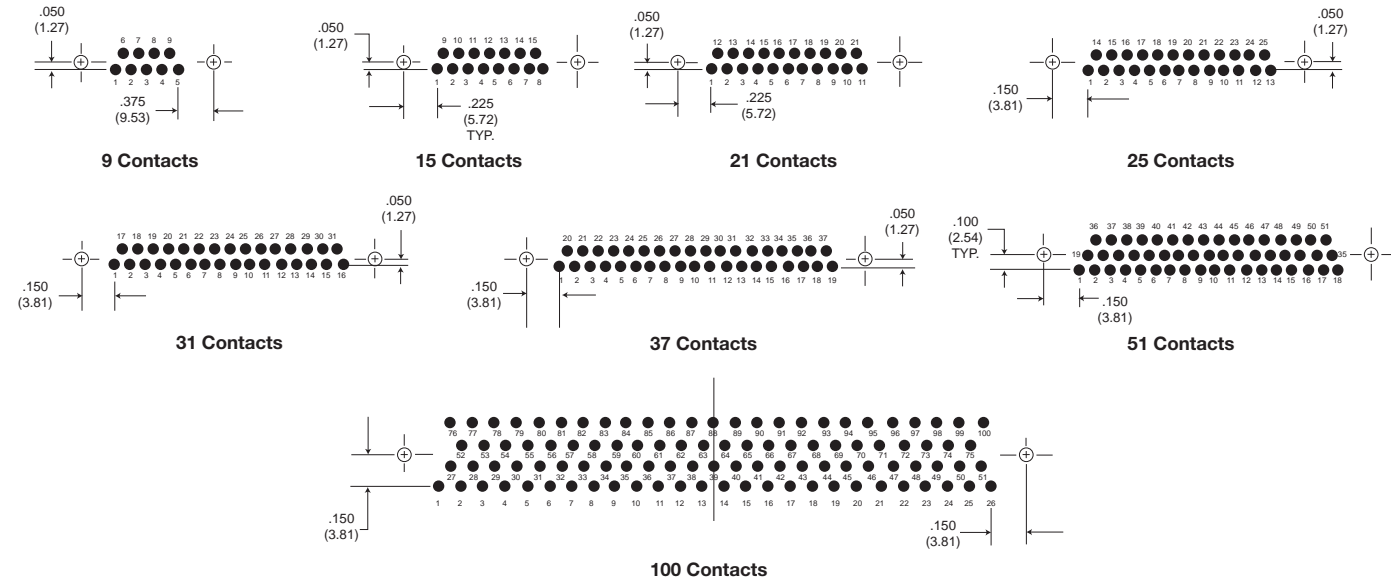

NOTE: Standard lead termination is #24 AWG, solid copper, solder or tin dipped
All Termination Configurations .100 (2.54) x .100 (2.54) Grid Pattern, Offset .050 (1.27)

| B | B | | C | | | | | | | |
|-------|---------------|---------------|---------------|---------------|---------------|--------------|--------------|-------------|--------------|--------------|
| | | ±.007 (.18) | ±.005 (.13) | | | | | | | |
| B | 1.390 (35.31) | 1.150 (29.21) | .565 (14.35) | .785 (19.94) | .334 (8.48) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| B | 1.390 (35.31) | 1.150 (29.21) | .565 (14.35) | .785 (19.94) | .402 (10.21) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 15 B | 1.390 (35.31) | 1.150 (29.21) | .715 (18.16) | .935 (23.75) | .484 (12.29) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 15 B | 1.390 (35.31) | 1.150 (29.21) | .715 (18.16) | .935 (23.75) | .552 (13.97) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 1 B | 1.690 (43.93) | 1.450 (36.83) | .865 (21.97) | 1.085 (27.56) | .634 (16.10) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 1 B | 1.690 (43.93) | 1.450 (36.83) | .865 (21.97) | 1.085 (27.56) | .702 (17.83) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 5 B | 1.740 (44.20) | 1.500 (38.10) | .965 (24.51) | 1.185 (30.10) | .734 (18.64) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 5 B | 1.740 (44.20) | 1.500 (38.10) | .965 (24.51) | 1.185 (30.10) | .802 (20.37) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 31 B | 2.040 (51.82) | 1.800 (45.72) | 1.115 (28.32) | 1.335 (33.91) | .884 (22.45) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 31 B | 2.040 (51.82) | 1.800 (45.72) | 1.115 (28.32) | 1.335 (33.91) | .952 (24.18) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 37 B | 2.340 (59.44) | 2.100 (53.34) | 1.265 (32.13) | 1.485 (37.72) | 1.034 (26.26) | .185 (4.70) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 37 B | 2.340 (59.44) | 2.100 (53.34) | 1.265 (32.13) | 1.485 (37.72) | 1.102 (27.99) | .253 (6.43) | .308 (7.82) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 51 B | 2.270 (51.66) | 2.000 (50.80) | 1.215 (30.86) | 1.435 (36.45) | .984 (24.99) | .228 (5.79) | .351 (8.92) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 51 B | 2.270 (51.66) | 2.000 (50.80) | 1.215 (30.86) | 1.435 (36.45) | 1.052 (26.72) | .296 (7.52) | .351 (8.92) | .165 (4.19) | .355 (9.02) | .555 (14.10) |
| 100 B | 3.070 (77.98) | 2.800 (71.12) | 1.800 (45.72) | 2.175 (55.24) | 1.384 (35.15) | .271 (6.88) | .460 (11.68) | .303 (7.70) | .550 (12.70) | .686 (17.42) |
| 100 B | 3.070 (77.98) | 2.800 (71.12) | 1.800 (45.72) | 2.175 (55.24) | 1.508 (38.30) | .394 (10.01) | .460 (11.68) | .303 (7.70) | .550 (12.70) | .686 (17.75) |

*For jackpost, add letter "P" or "M7" for sizes 9-51, "M17" for size 100.



Microminiature


Dimensions shown in inches (mm)
Specifications and dimensions subject to change

www.ittcannon.com




Micro-D PCB - .050" Contact Spacing MDM-PCB

BR (Board Right Angle) Series

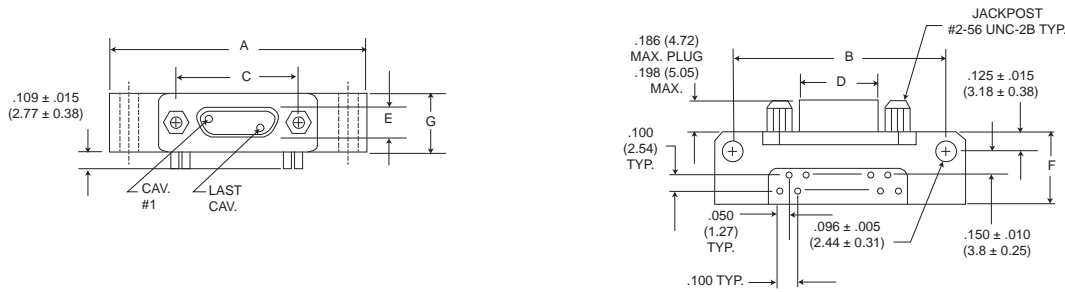

PCB Termination Arrangements (Viewed from bottom of connector, PCB solder side.)

Identification number shown for plug connector, use reverse order for socket connector.

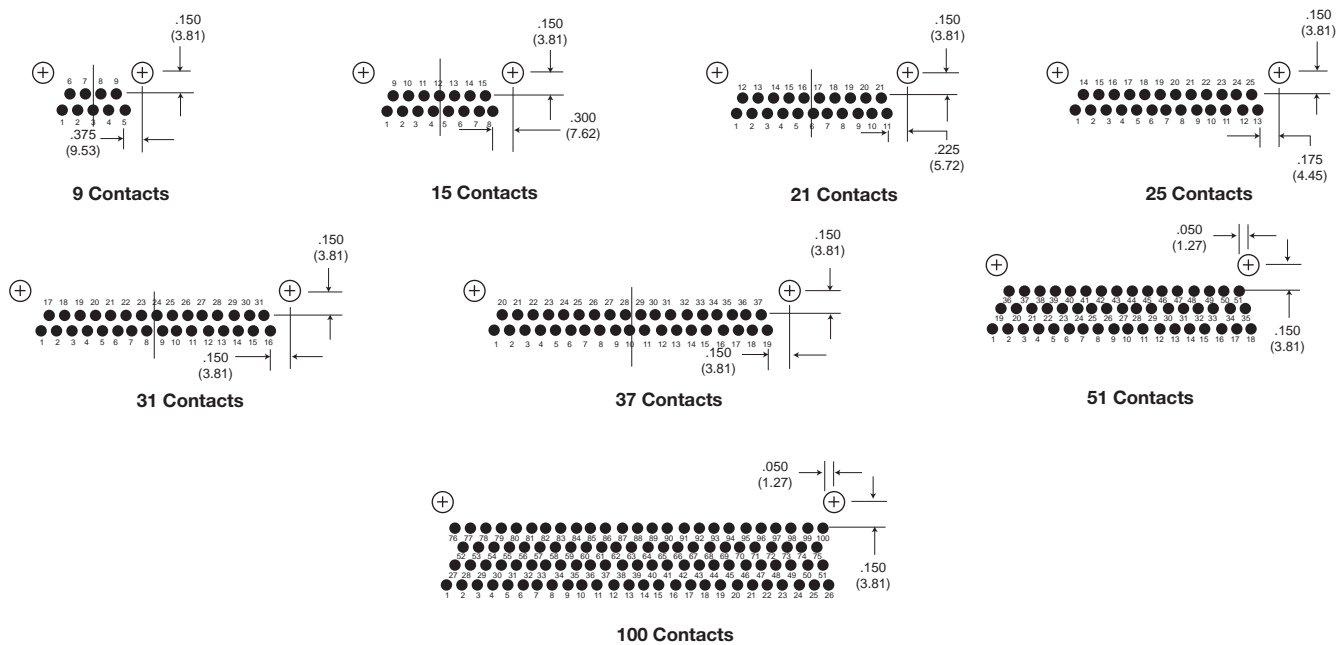

NOTE: Standard lead termination is #24 AWG, gold plated, solid copper, solder or tin dripped.

All Termination Configurations .100 (2.54) x .100 (2.54) Grid Pattern, Offset .050 (1.27).

| Part Number By Shell Size | A Max. | B ± .007 (.18) | C ± .005 (.13) | D Max. | E Max. | F Max. | G Max. |
|------------------------------|---------------|-------------------|-------------------|---------------|--------------|--------------|--------------|
| MDM-9PBR* | 1.390 (35.31) | 1.150 (29.21) | .565 (14.35) | .334 (8.48) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-9SBR* | 1.390 (35.31) | 1.150 (29.21) | .565 (14.35) | .402 (10.21) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-15PBR* | 1.540 (39.12) | 1.300 (33.02) | .715 (18.16) | .484 (12.29) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-15SBR* | 1.540 (39.12) | 1.300 (33.02) | .715 (18.16) | .552 (13.97) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-21PBR* | 1.690 (42.93) | 1.450 (36.83) | .865 (21.97) | .634 (16.10) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-21SBR* | 1.690 (42.93) | 1.450 (36.83) | .865 (21.97) | .702 (17.83) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-25PBR* | 1.790 (45.47) | 1.550 (39.37) | .965 (24.51) | .734 (18.64) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-25SBR* | 1.790 (45.47) | 1.550 (39.37) | .965 (24.51) | .802 (20.37) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-31PBR* | 2.040 (51.82) | 1.800 (45.72) | 1.115 (28.32) | .884 (22.45) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-31SBR* | 2.040 (51.82) | 1.800 (45.72) | 1.115 (28.32) | .952 (24.18) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-37PBR* | 2.340 (59.44) | 2.100 (53.34) | 1.265 (32.13) | 1.034 (26.26) | .185 (4.70) | .455 (11.56) | .308 (7.82) |
| MDM-37SBR* | 2.340 (59.44) | 2.100 (53.34) | 1.265 (32.13) | 1.102 (27.99) | .253 (6.43) | .455 (11.56) | .308 (7.82) |
| MDM-51PBR* | 1.875 (47.63) | 1.600 (40.64) | 1.215 (30.86) | .984 (24.99) | .228 (5.79) | .565 (14.35) | .351 (8.92) |
| MDM-51SBR* | 1.875 (47.63) | 1.600 (40.64) | 1.215 (30.86) | 1.052 (26.72) | .296 (7.52) | .565 (14.35) | .351 (8.92) |
| MDM-100PBR* | 2.74 (69.72) | 2.500 (63.50) | 1.800 (45.72) | 1.384 (35.15) | .271 (6.88) | .755 (19.18) | .394 (10.01) |
| MDM-100SBR* | 2.74 (69.72) | 2.500 (63.50) | 1.800 (45.72) | 1.508 (38.10) | .394 (10.01) | .755 (19.18) | .394 (10.01) |

*For jackpost, add letter "P" or "M7" for sizes 9-51, "M17" for size 100.




Dimensions shown in inches (mm)
Specifications and dimensions subject to change

www.ittcannon.com


Micro-D PCB - .050" Contact Spacing MDM-PCB

CBR (Condensed Board Right Angle) Series

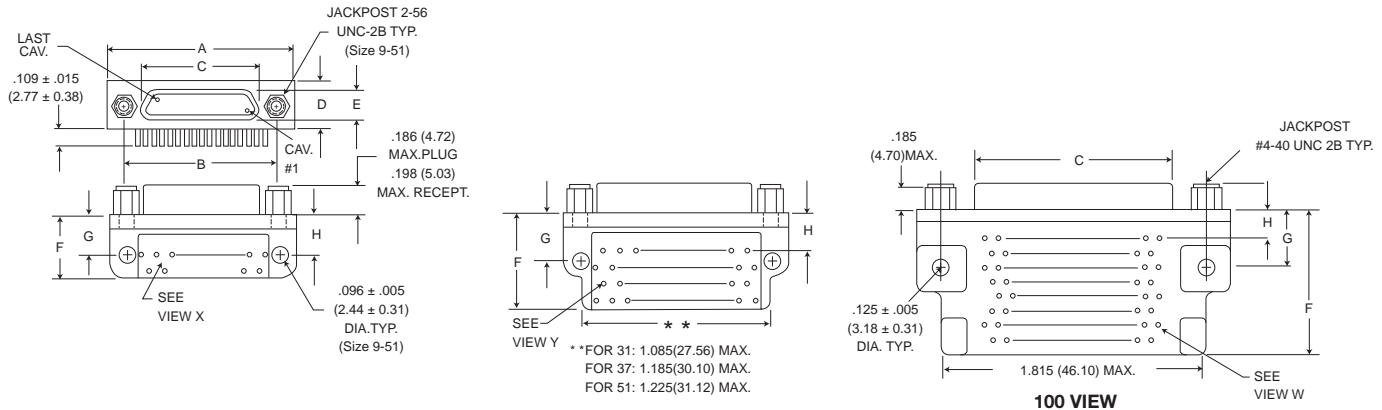

PCB Termination Arrangements (Viewed from bottom of connector, PCB solder side.)

Identification number shown for plug connector, use reverse order for socket connector.

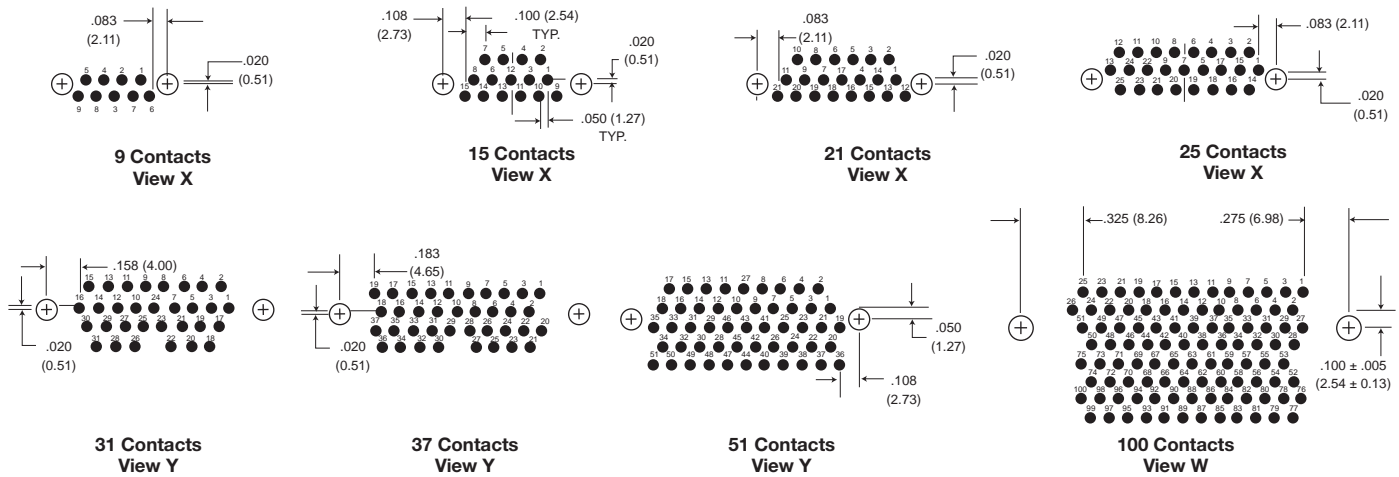

All Termination Configurations $.100$ (2.54) x $.100$ (2.54) Grid Pattern, Offset $.050$ (1.27).

NOTE: Standard lead termination is #24 AWG, solid copper, solder or tin dripped.

| Part Number By Shell Size | A Max. | B ± .005 (.13) | C Max. | D Max. | E Max. | F Max. | G ± .010 (.25) | H ± .010 (.25) |
|------------------------------|---------------|-------------------|---------------|--------------|--------------|---------------|-------------------|-------------------|
| MDM-9PCBR* | .785 (19.94) | .565 (14.35) | .334 (8.48) | .308 (7.82) | .185 (4.70) | .420 (10.67) | .250 (6.35) | .230 (5.81) |
| MDM-9SCBR* | .785 (19.94) | .565 (14.35) | .402 (10.21) | .308 (7.82) | .253 (6.43) | .420 (10.67) | .250 (6.35) | .230 (5.81) |
| MDM-15PCBR* | .935 (23.75) | .715 (18.16) | .484 (12.29) | .308 (7.82) | .185 (4.70) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-15SCBR* | .935 (23.75) | .715 (18.16) | .552 (13.97) | .308 (7.82) | .253 (6.43) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-21PCBR* | 1.085 (27.56) | .865 (21.97) | .634 (16.10) | .308 (7.82) | .185 (4.70) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-21SCBR* | 1.085 (27.56) | .865 (21.97) | .702 (17.83) | .308 (7.82) | .253 (6.43) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-25PCBR* | 1.185 (30.10) | .965 (24.51) | .734 (18.64) | .308 (7.82) | .184 (4.70) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-25SCBR* | 1.185 (30.10) | .965 (24.51) | .802 (20.37) | .308 (7.82) | .253 (6.43) | .420 (10.67) | .250 (6.35) | .130 (3.30) |
| MDM-31PCBR* | 1.335 (33.91) | 1.115 (28.32) | .884 (22.45) | .308 (7.82) | .185 (4.70) | .520 (13.21) | .250 (6.35) | .130 (3.30) |
| MDM-31SCBR* | 1.335 (33.91) | 1.115 (28.32) | .952 (24.18) | .308 (7.82) | .253 (6.43) | .520 (13.21) | .250 (6.35) | .130 (3.30) |
| MDM-37PCBR* | 1.485 (37.72) | 1.265 (32.13) | 1.034 (26.26) | .308 (7.82) | .185 (4.70) | .520 (13.21) | .250 (6.35) | .130 (3.30) |
| MDM-37SCBR* | 1.485 (37.72) | 1.265 (32.13) | 1.102 (27.99) | .308 (7.82) | .253 (6.43) | .520 (13.21) | .250 (6.35) | .130 (3.30) |
| MDM-51PCBR* | 1.435 (36.45) | 1.215 (30.86) | .984 (24.99) | .351 (8.92) | .228 (5.79) | .650 (16.15) | .300 (7.62) | .150 (3.81) |
| MDM-51SCBR* | 1.435 (36.45) | 1.215 (30.86) | 1.052 (26.72) | .351 (8.92) | .296 (7.52) | .650 (16.15) | .300 (7.62) | .150 (3.81) |
| MDM-100PCBR* | 2.170 (55.12) | 1.800 (45.72) | 1.384 (35.15) | .394 (10.01) | .271 (6.88) | 1.000 (25.40) | .400 (10.16) | .200 (5.08) |
| MDM-100SCBR* | 2.170 (55.12) | 1.800 (45.72) | 1.508 (38.10) | .394 (10.01) | .394 (10.01) | 1.000 (25.40) | .400 (10.16) | .200 (5.08) |

*For jackpost, add letter "P" or "M7" for sizes 9-51, "M17" for size 100.



Microminiature

Dimensions shown in inches (mm)
Specifications and dimensions subject to change

www.ittcannon.com



Shielded MDM PCB Connector Family



The new shielded MDM PCB-CBR board mount connector is an extension of ITT-ICS' standard MDM series thru hole PCB connectors. This new EMI shielded version includes a built in shielding can for effective shielding performance. This new design allows for terminations right to a PCB or to a flex circuit. The connector utilizes the standard MDM shell and is available in condensed board right angle configurations. The pin layouts are from 9-51 positions. Jackpost mounting for use with locking hardware is also available.

| | |
|--|-----------------------|
| Current Rating | 3 AMP |
| Dielectric Withstanding Voltage | 600 VAC sea Level |
| Insulation Resistance | 5000 megaohms maximum |
| Contact Resistance | 8 milliohms maximum |
| Operating Temperature | -55° C to +150° C |
| Shock, Vibration | 50 g. , 20 g |

Performance

The table below summarizes the results of key tests performed in accordance with MIL-STD-1344, where applicable. Data is applicable to standard connectors with standard termination. Variations may affect this data, so please consult customer service for further information on your requirements.

The table below summarizes the results of key tests performed in accordance with MIL-STD-1344, where applicable. Data is applicable to standard connectors with standard termination. Variations may affect this data, so please consult customer service for further information on your requirements.

| Test | Method | Criteria of Acceptance |
|----------------------------------|--|---|
| Dielectric Withstanding Voltage | Method 3001: 600 VAC at sea level 150 VAC at 70,00' altitude | No breakdown No breakdown |
| Insulation Resistance | Method 3003 | 5,000 megohms minimum |
| Thermal Shock | Method 1003, Condition A: - 55°C to +125°C | No physical damage |
| Physical Shock | Method 2004, Condition E: 50 G's, 3 axes, 6 millisecond duration sawtooth pulse | No physical damage No loss of continuity > 1 µsec |
| Vibration | Method 2005, Condition IV: 20 G's, 10-2,000 Hz. 12 hrs | No physical damage No loss of continuity > 1 µsec |
| Durability | 500 cycles of mating and unmating, 500 CPH max. | No mechanical or electrical defects |
| Moisture Resistance | Method 1002, Type II, omit steps 7a & 7b | Insulation resistance > 100 megohms |
| Salt Spray | Method 1001, Condition B: 48 hours | Shall be capable of mating and unmating, and meet contact resistance requirements |
| Contact Resistance (MIL-STD-202) | Method 1001, Condition B: At 3 amps At 1 milliamp | 8 milliohms maximum 10 milliohms maximum |
| Contact Retention | Per MIL-DTL-83513 | 5 lb. minimum axial load |

Microminiature




D



Dimensions shown in inches (mm)
Specifications and dimensions subject to change

Shielded MDM PCB Connector Family

Talking Dog

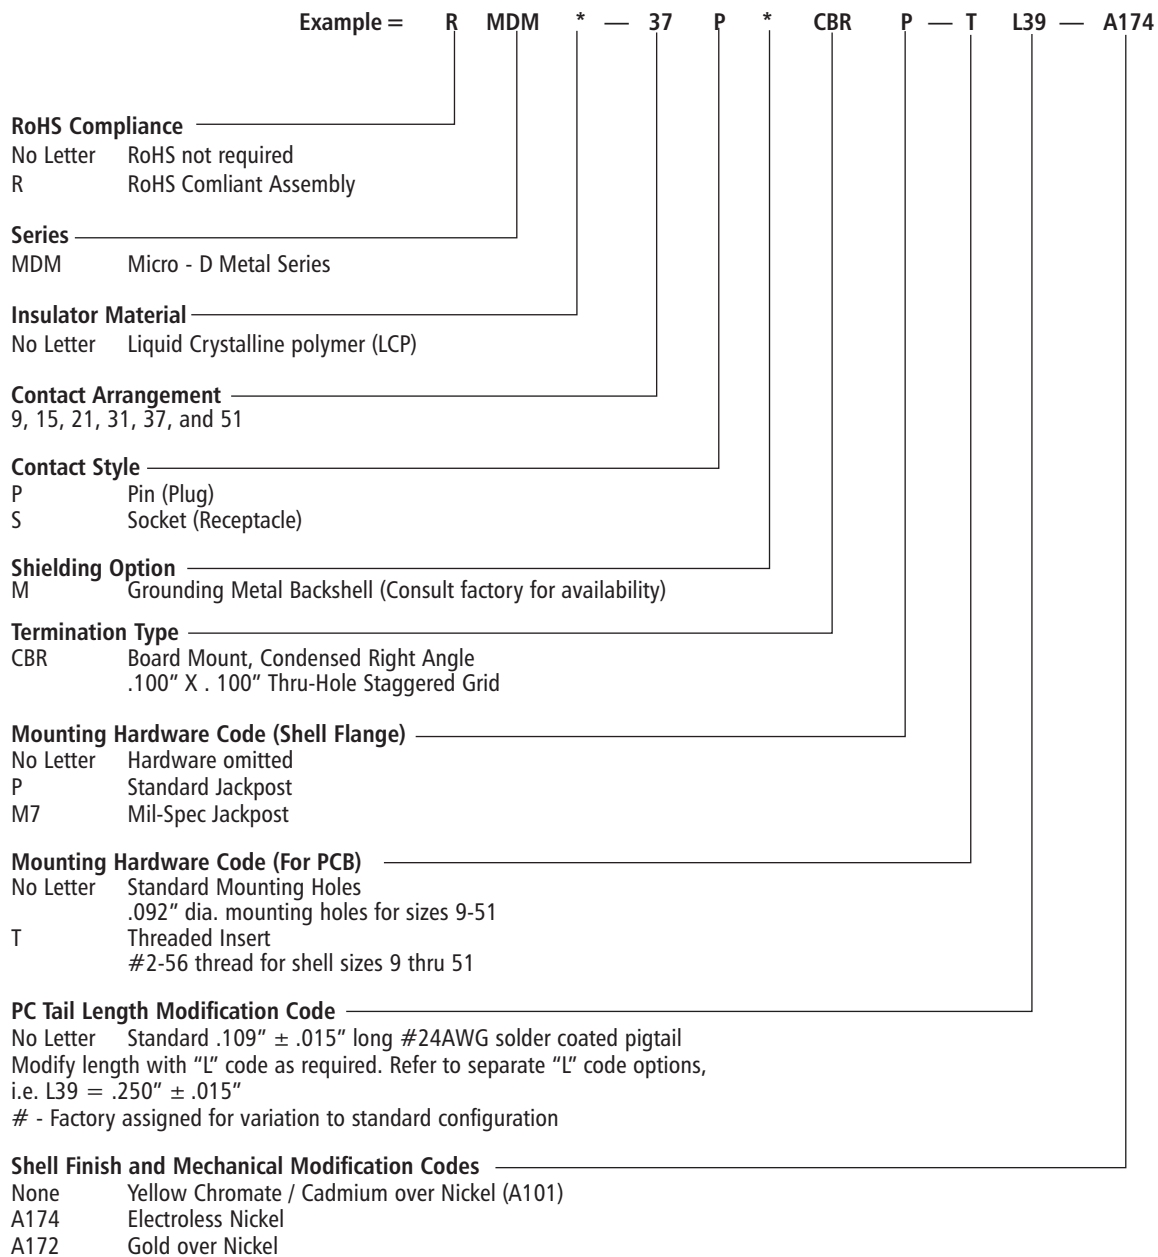

Note: Consult factory for version with jack screws without mounting holes for use with flex circuit applications.
Consult factory for tooled versions.



Microminiature

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [D-Sub Micro-D Connectors](#) category:

Click to view products by [ITT](#) manufacturer:

Other Similar products are found below :

[89076GBEPR](#) [M2430815F](#) [M243082311F](#) [M2430833F](#) [M2430834F](#) [M24308/4-6F](#) [65-1920-15](#) [M83513/01-HN](#) [M83513/03-A10N](#)
[M83513/03-B14C](#) [M83513/03-D09C](#) [M83513/03-D11N](#) [M83513/03-G02N](#) [M83513/03-G05N](#) [M83513/03-G08C](#) [M83513/03-G09N](#)
[M83513/03-G12N](#) [M83513/03-H13N](#) [M83513/04-E15N](#) [M83513/04-G04C](#) [M83513/10-E01NP](#) [M83513/13-B01NP](#) [M83513/13-C01NN](#)
[M83513/16-A01CP](#) [M83513/22-D01NP](#) [M83513/25-B01NP](#) [6R2004A30F015](#) [6R4006A28A120](#) [703006A13F060](#) [704002A03F200](#)
[705001A13F120](#) [7-1532020-5](#) [748567-1-P](#) [MDM-15PCBRM7T](#) [MDM-15PH003B-A174](#) [MDM-15PH034B](#) [MDM-15SH004B](#) [MDM-](#)
[21PH003K](#) [MDM-21PH003P](#) [MDM-25PH003B-A174](#) [MDM-9PH003M7](#) [MDM-9SH006B](#) [773030D02F030](#) [790-024PA-5MS](#) [790-024PB-](#)
[9ML](#) [790-027SH-10P4MEP](#) [790-041PJ-25P2MPA](#) [791-004SH-66MSA](#) [7R3A00A19A1201](#) [7R3A04A19A120](#)