

HiPerFRED

V_{RRM} = 400 V
 I_{FAV} = 2x 120 A
 t_{rr} = 30 ns


High Performance Fast Recovery Diode

Low Loss and Soft Recovery

Parallel legs


Part number

DPF240X400NA

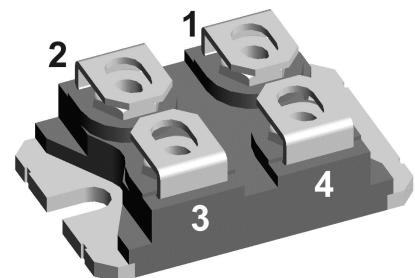

Backside: isolated

 E72873

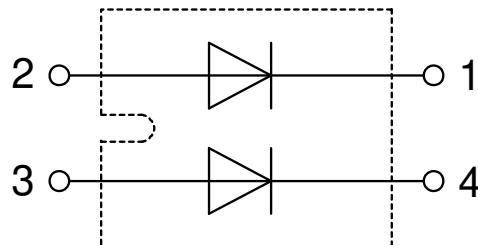

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm} -values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: SOT-227B (minibloc)

- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			400	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			400	V
I_R	reverse current, drain current	$V_R = 400 V$ $V_R = 400 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		10 0.5	μA mA
V_F	forward voltage drop	$I_F = 120 A$ $I_F = 240 A$ $I_F = 120 A$ $I_F = 240 A$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		1.25 1.54 1.06 1.42	V V
I_{FAV}	average forward current	$T_C = 70^\circ C$ rectangular $d = 0.5$	$T_{VJ} = 150^\circ C$		120	A
V_{FO} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.71 2.9	V $m\Omega$
R_{thJC}	thermal resistance junction to case				0.5	K/W
R_{thCH}	thermal resistance case to heatsink			0.1		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ C$		250	W
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 V$	$T_{VJ} = 45^\circ C$		1.20	kA
C_J	junction capacitance	$V_R = 200 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$		187	pF
I_{RM}	max. reverse recovery current		$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		7 18	A A
t_{rr}	reverse recovery time	$I_F = 120 A; V_R = 240 V$ $-di_F/dt = 200 A/\mu s$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		30 140	ns ns

Package SOT-227B (minibloc)

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
I_{RMS}	RMS current	per terminal			150	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		150	°C
Weight				30		g
M_D	mounting torque		1.1		1.5	Nm
M_T	terminal torque		1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface / striking distance through air	terminal to terminal	10.5	3.2		mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8		mm
V_{ISOL}	isolation voltage	t = 1 second t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000 2500		V V

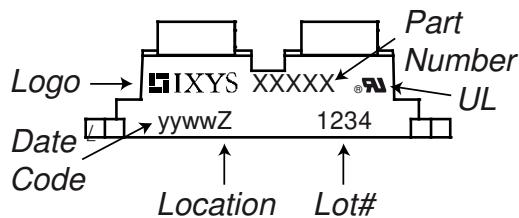Product Marking

Part description


D = Diode
P = HiPerFRED
F = ultra fast
240 = Current Rating [A]
X = Parallel legs
400 = Reverse Voltage [V]
NA = SOT-227B (minibloc)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPF240X400NA	DPF240X400NA	Tube	10	499554

Equivalent Circuits for Simulation


* on die level

 $T_{VJ} = 150^\circ\text{C}$

	V_0	R_0	Fast Diode	
$V_{0\max}$	threshold voltage	0.71		V
$R_{0\max}$	slope resistance *	1.01		$\text{m}\Omega$

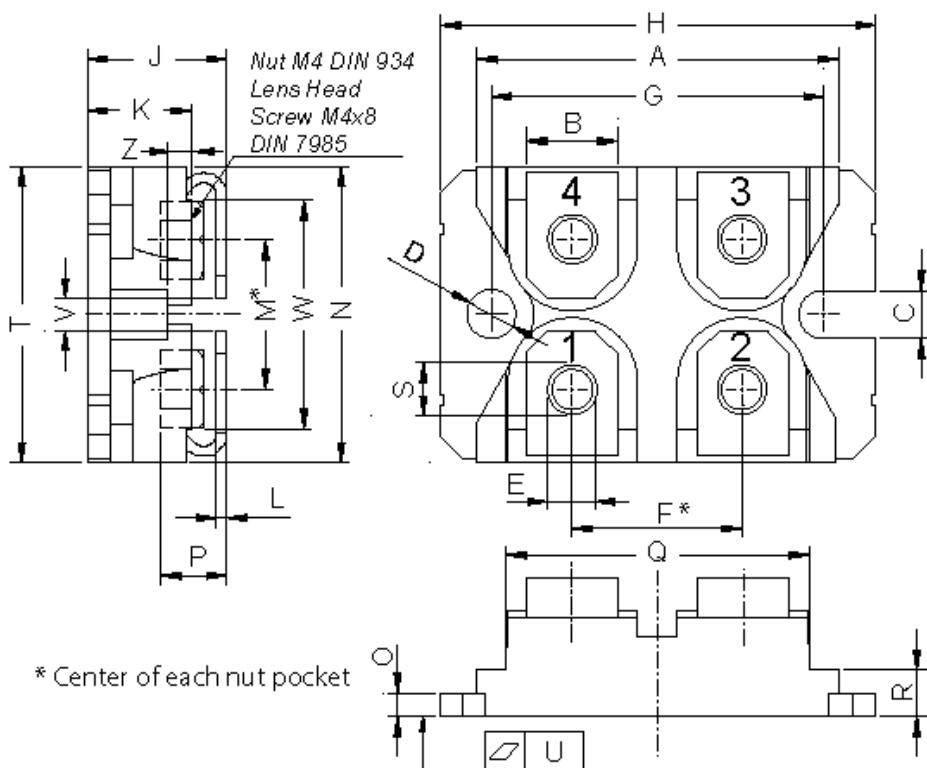Outlines SOT-227B (minibloc)


Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

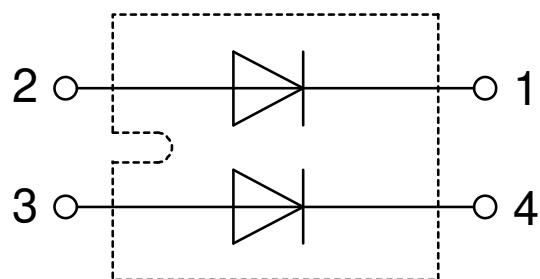

Fast Diode

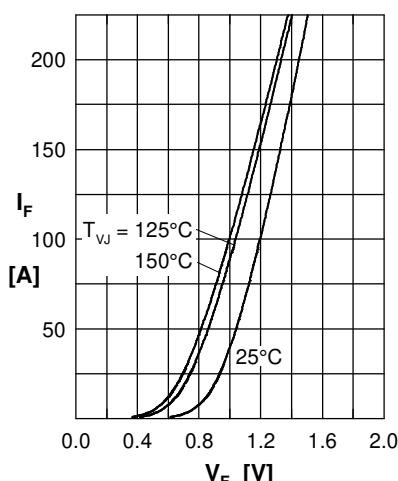


Fig. 1 Forward current
 I_F vs. V_F

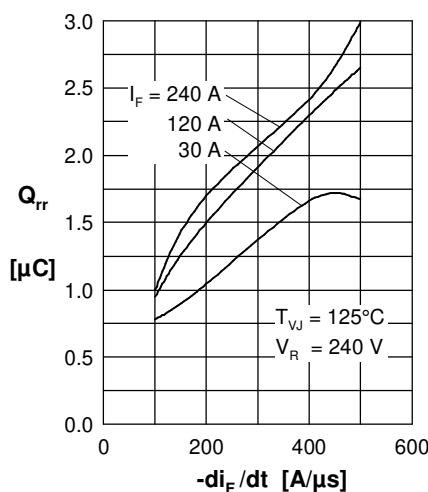


Fig. 2 Typ. reverse recovery charge
 Q_{rr} vs. $-di_F/dt$

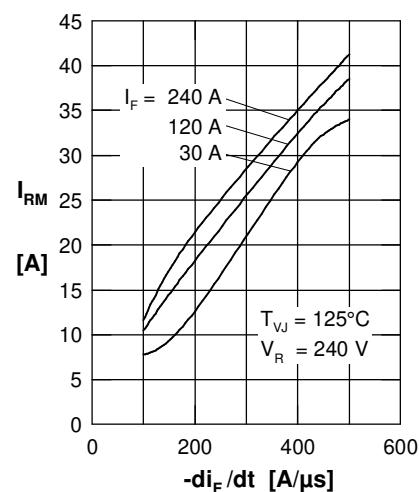


Fig. 3 Typ. reverse recovery current
 I_{RM} vs. $-di_F/dt$

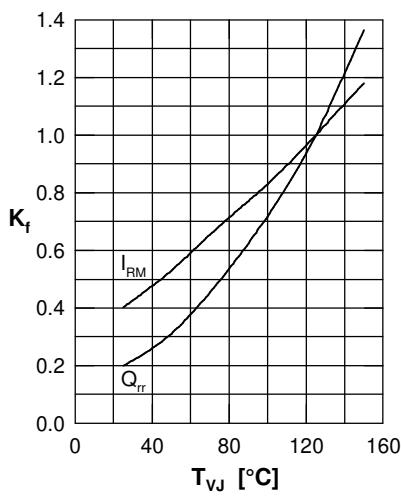


Fig. 4 Typ. dynamic parameters
 Q_{rr} , I_{RM} vs. T_{VJ}

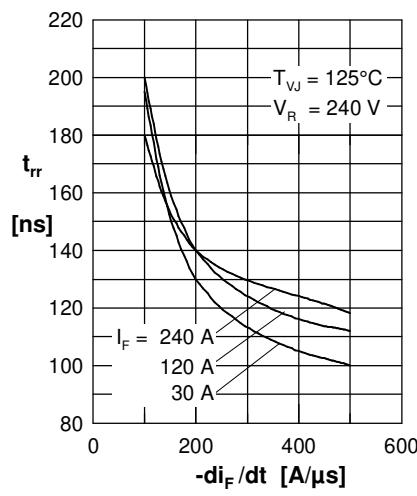


Fig. 5 Typ. reverse recovery time
 t_{rr} vs. $-di_F/dt$

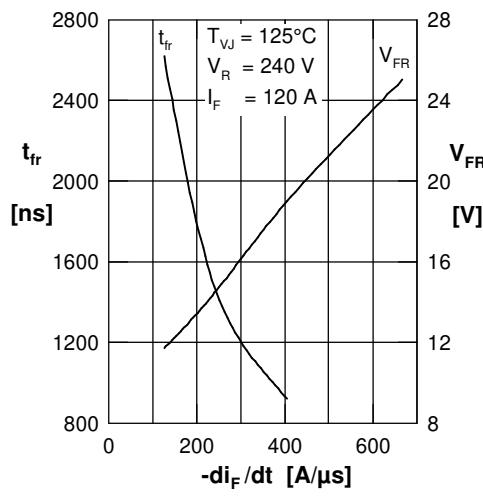


Fig. 6 Typ. forward recovery voltage
 V_{FR} & t_{fr} vs. di_F/dt

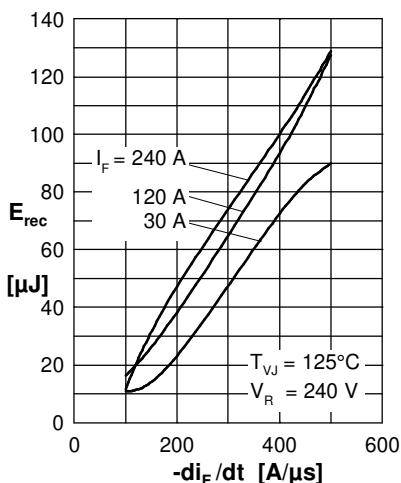


Fig. 7 Typ. recovery energy
 E_{rec} vs. $-di_F/dt$

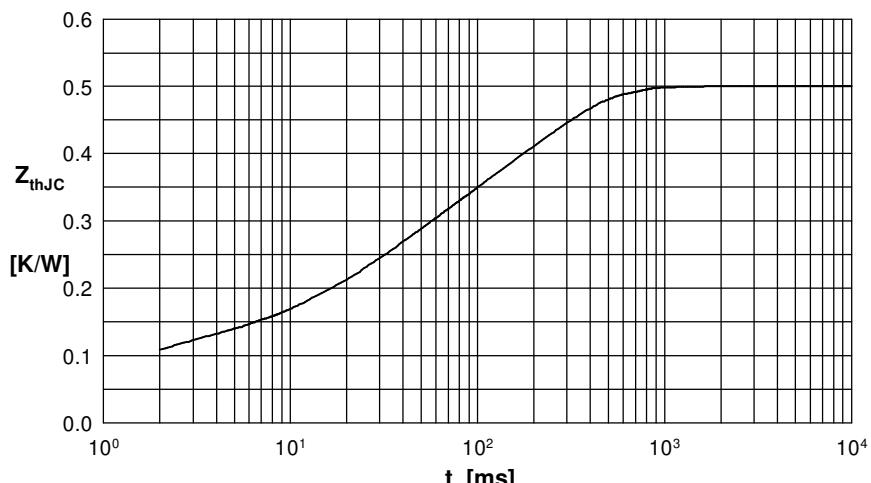


Fig. 8 Transient thermal impedance junction to case

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Discrete Semiconductor Modules category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[M252511FV](#) [DD260N12K-A](#) [DD380N16A](#) [DD89N1600K-A](#) [APT2X21DC60J](#) [APT58M80J](#) [B522F-2-YEC](#) [MSTC90-16](#) [25.163.0653.1](#)
[25.163.2453.0](#) [25.163.4253.0](#) [25.190.2053.0](#) [25.194.3453.0](#) [25.320.4853.1](#) [25.320.5253.1](#) [25.326.3253.1](#) [25.326.3553.1](#) [25.330.1653.1](#)
[25.330.4753.1](#) [25.330.5253.1](#) [25.334.3253.1](#) [25.334.3353.1](#) [25.350.2053.0](#) [25.352.4753.1](#) [25.522.3253.0](#) [T483C](#) [T484C](#) [T485F](#) [T485H](#)
[T512F-YEB](#) [T513F](#) [T514F](#) [T554](#) [T612FSE](#) [25.161.3453.0](#) [25.179.2253.0](#) [25.194.3253.0](#) [25.325.1253.1](#) [25.326.4253.1](#) [25.330.0953.1](#)
[25.332.4353.1](#) [25.350.1653.0](#) [25.350.2453.0](#) [25.352.1453.0](#) [25.352.1653.0](#) [25.352.2453.0](#) [25.352.5453.1](#) [25.522.3353.0](#) [25.602.4053.0](#)
[25.640.5053.0](#)