


Fast Recovery Epitaxial Diode (FRED)

ECO-PAC 2

Preliminary Data Sheet

V_{RSM}	V_{RRM}	Typ
V	V	
200	200	DSEI 2x161-02P



Symbol	Conditions	Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$	270	A
I_{FAVM}^*	$T_C = 70^\circ\text{C}$; rectangular; $d = 0.5$	165	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	1200	A
	$t = 8.3\text{ ms}$ (60 Hz), sine	1300	A
I^2dt	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	1080	A
	$t = 8.3\text{ ms}$ (60 Hz), sine	1170	A
I^2dt	$T_{VJ} = 45^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	7200	A ² s
	$t = 8.3\text{ ms}$ (60 Hz), sine	7100	A ² s
I^2dt	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0\text{ V}$; $t = 10\text{ ms}$ (50 Hz), sine	5800	A ² s
	$t = 8.3\text{ ms}$ (60 Hz), sine	700	A ² s
T_{VJ}		-40 ... +150	°C
T_{VJM}		150	°C
T_{stg}		-40 ... +125	°C
V_{ISOL}	50/60 Hz, RMS	$t = 1\text{ min}$	2500 V ~
	$I_{ISOL} \leq 1\text{ mA}$	$t = 1\text{ s}$	3600 V ~
M_d	Mounting torque (M4)		1.5-2.0 Nm
			14-18 lb.in.
Weight	typ.	20	g

Features

- 2 independent FRED in 1 package
- Isolation voltage 3600 V~
- Planar glass passivated chips
- Low forward voltage drop
- Leads suitable for PC board soldering
- Very short recovery time
- Soft recovery behaviour


Applications

- Antiparallel diode for high frequency switching devices
- Anti saturation diode
- Snubber diode
- Free wheeling diode in converters and motor control circuits
- Rectifiers in switch mode power supplies (SMPS)
- Inductive heating and melting
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- Easy to mount with two screws
- Space and weight savings
- Improved temperature and power cycling
- Low noise switching
- Small and light weight

Dimensions in mm (1 mm = 0,0394")

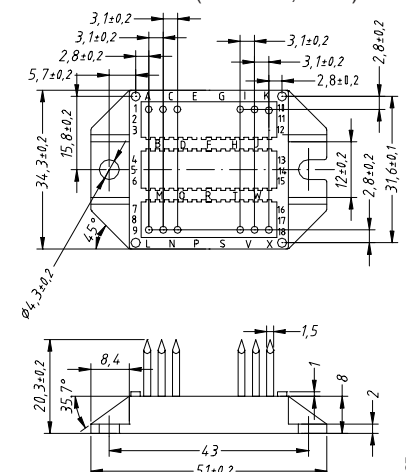

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
I_R	$T_{VJ} = 25^\circ\text{C}$; $V_R = V_{RRM}$			3 mA
	$T_{VJ} = 25^\circ\text{C}$; $V_R = 0.8 \cdot V_{RRM}$			2 mA
	$T_{VJ} = 125^\circ\text{C}$; $V_R = 0.8 \cdot V_{RRM}$			80 mA
V_F	$I_T = 200\text{ A}$; $T_{VJ} = 25^\circ\text{C}$			1.2 V
V_{TO}	For power-loss calculations only			0.53 V
r_T				2.6 mΩ
R_{thJC}	per Diode			0.29 K/W
R_{thCH}	per Diode		0.2	K/W
I_{RM}	$I_F = 100\text{ A}$; $-di_F/dt = 200\text{ A}/\mu\text{s}$; $V_R = 100\text{ V}$ $L \leq 0.05\text{ mH}$; $T_{VJ} = 100^\circ\text{C}$		20	A
t_{rr}	$I_F = 1\text{ A}$; $-di_F/dt = 400\text{ A}/\mu\text{s}$; $V_R = 30\text{ V}$; $T_{VJ} = 25^\circ\text{C}$		35	ns
d_s	Creeping distance on surface	11.2		mm
d_A	Creeping distance in air	11.2		mm
a	Max. allowable acceleration			50 m/s ²

* I_{FAVM} rating includes reverse blocking losses at T_{VJM} ; $V_R = 0.8 V_{RRM}$; $d = 0.5$

IXYS reserves the right to change limits, test conditions and dimensions.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rectifiers](#) category:

Click to view products by [IXYS](#) manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[CLH03\(Te16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)
[70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-](#)
[HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#) [SKN300/16](#)