
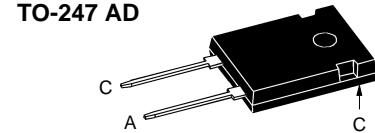


Fast Recovery Epitaxial Diode (FRED)

DSEI 60

I_{FAVM} = 52 A
V_{RRM} = 1200 V
t_{rr} = 40 ns

V _{RSM}	V _{RRM}	Type
V	V	
1200	1200	DSEI 60-12A



A = Anode, C = Cathode

Symbol	Test Conditions	Maximum Ratings	
I _{FRMS}	T _{VJ} = T _{VJM}	100	A
I _{FAVM} ①	T _C = 60°C; rectangular, d = 0.5	52	A
I _{FRM}	t _p < 10 µs; rep. rating, pulse width limited by T _{VJM}	800	A
I _{FSM}	T _{VJ} = 45°C; t = 10 ms (50 Hz), sine	500	A
	t = 8.3 ms (60 Hz), sine	540	A
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine	450	A
	t = 8.3 ms (60 Hz), sine	480	A
I ² t	T _{VJ} = 45°C t = 10 ms (50 Hz), sine	1250	A ² s
	t = 8.3 ms (60 Hz), sine	1200	A ² s
	T _{VJ} = 150°C; t = 10 ms (50 Hz), sine	1000	A ² s
	t = 8.3 ms (60 Hz), sine	950	A ² s
T _{VJ}		-40...+150	°C
T _{VJM}		150	°C
T _{stg}		-40...+150	°C
P _{tot}	T _C = 25°C	189	W
M _d	Mounting torque	0.8...1.2	Nm
Weight		6	g

Symbol	Test Conditions	Characteristic Values	
		typ.	max.
I _R	T _{VJ} = 25°C V _R = V _{RRM} T _{VJ} = 25°C V _R = 0.8 • V _{RRM} T _{VJ} = 125°C V _R = 0.8 • V _{RRM}	2.2 0.5 14	mA mA mA
V _F	I _F = 60 A; T _{VJ} = 150°C T _{VJ} = 25°C	2.0 2.55	V V
V _{To}	For power-loss calculations only	1.65	V
r _T	T _{VJ} = T _{VJM}	8.3	mΩ
R _{thJC}		0.66	K/W
R _{thCK}		35	K/W
R _{thJA}		0.25	K/W
t _{rr}	I _F = 1 A; -di/dt = 200 A/µs; V _R = 30 V; T _{VJ} = 25°C	40	60
I _{RM}	V _R = 540 V; I _F = 60 A; -di _F /dt = 480 A/µs L ≤ 0.05 µH; T _{VJ} = 100°C	32	36
			A

① I_{FAVM} rating includes reverse blocking losses at T_{VJM}, V_R = 0.8 V_{RRM}, duty cycle d = 0.5

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions

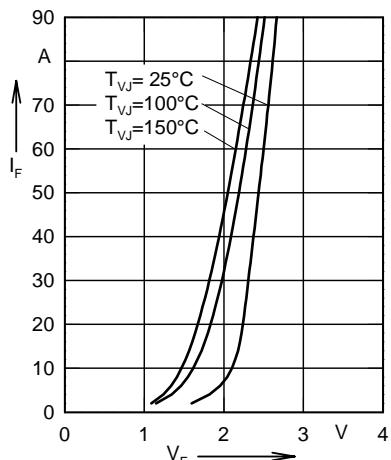


Fig. 1 Forward current versus voltage drop.

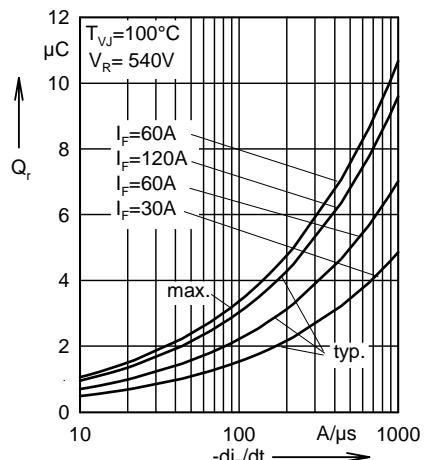


Fig. 2 Recovery charge versus $-di_F/dt$.

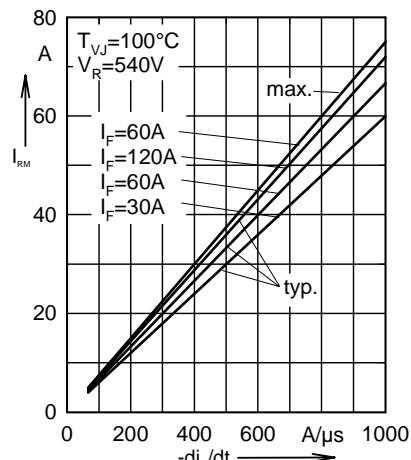


Fig. 3 Peak reverse current versus $-di_F/dt$.

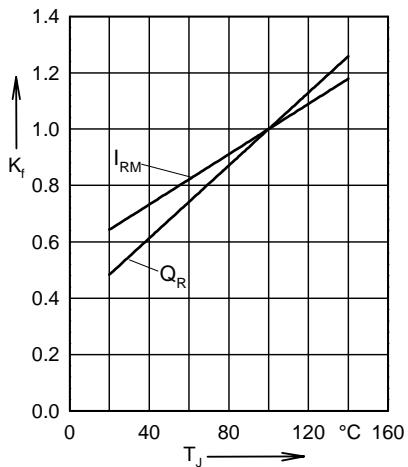


Fig. 4 Dynamic parameters versus junction temperature.

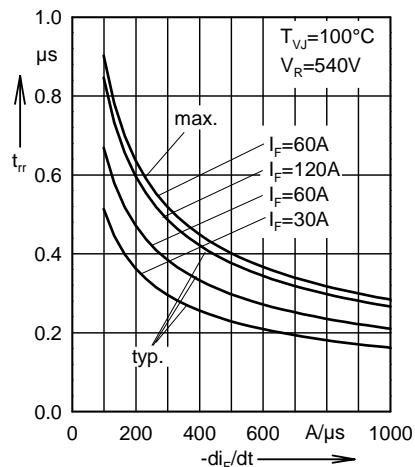


Fig. 5 Recovery time versus $-di_F/dt$.

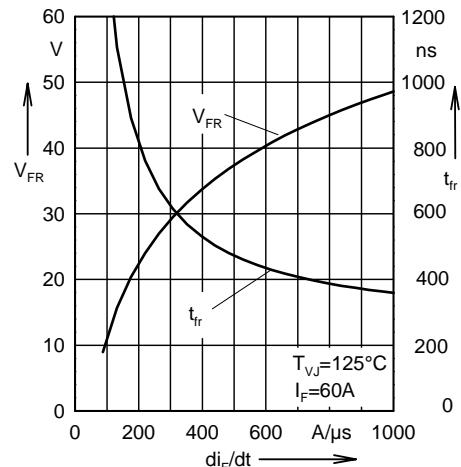


Fig. 6 Peak forward voltage versus di_F/dt .


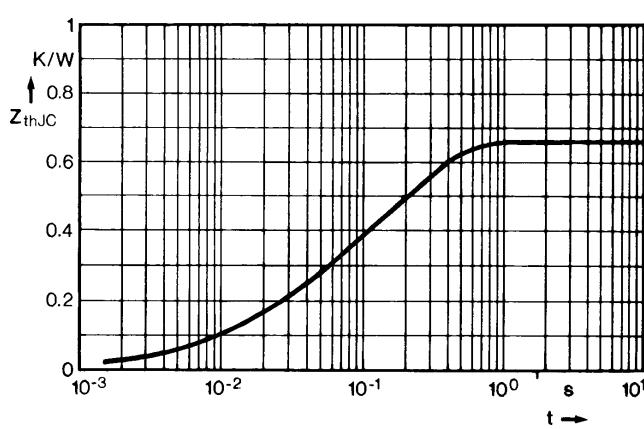


Fig. 7 Transient thermal impedance junction to case.

Dimensions



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	2.2	2.54	0.087	0.102

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Rectifiers category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[70HFR40](#) [RL252-TP](#) [150KR30A](#) [1N5397](#) [NTE5841](#) [NTE6038](#) [SCF5000](#) [1N4002G](#) [1N4005-TR](#) [JANS1N6640US](#) [481235F](#)
[RRE02VS6SGTR](#) [067907F](#) [MS306](#) [70HF40](#) [T85HFL60S02](#) [US2JFL-TP](#) [A1N5404G-G](#) [ACGRA4007-HF](#) [ACGRB207-HF](#)
[CLH03\(TE16L,Q\)](#) [ACGRC307-HF](#) [ACEFC304-HF](#) [NTE6356](#) [NTE6359](#) [NTE6002](#) [NTE6023](#) [NTE6039](#) [NTE6077](#) [85HFR60](#) [40HFR60](#)
[70HF120](#) [85HFR80](#) [D126A45C](#) [SCF7500](#) [D251N08B](#) [SCHJ22.5K](#) [SM100](#) [SCPA2](#) [SCH10000](#) [SDHD5K](#) [VS-12FL100S10](#) [ACGRA4001-HF](#) [D1821SH45T PR](#) [D1251S45T](#) [NTE5990](#) [NTE6358](#) [NTE6162](#) [NTE5850](#) [SKN300/16](#)