



**Trench™ P & N-Channel  
Power MOSFET  
Common Drain Topology**

**FMP76-01T**



	P CH.	N CH.
V <sub>DSS</sub>	- 100V	100V
I <sub>D25</sub>	- 54A	62A
R <sub>DS(on)</sub>	24mΩ	11mΩ
t <sub>rr(typ)</sub>	70ns	67ns

**ISOPLUS i4-Pak™**

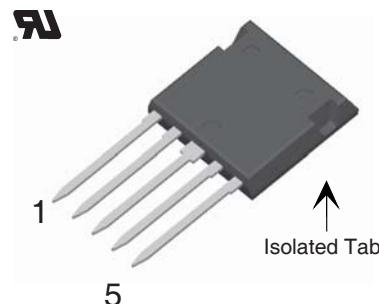

Symbol	Test Conditions	Maximum Ratings		
		Min.	Typ.	Max.
T <sub>J</sub>		-55 ... +150		°C
T <sub>JM</sub>		150		°C
T <sub>stg</sub>		-55 ... +150		°C
V <sub>ISOLD</sub>	50/60Hz, RMS, t = 1min, leads-to-tab	2500		~V
T <sub>L</sub>	1.6mm (0.062 in.) from case for 10s	300		°C
T <sub>SOLD</sub>	Plastic body for 10s	260		°C
F <sub>c</sub>	Mounting force	20..120 / 4.5..27		N/lb.

Symbol	Test Conditions	Characteristic Values		
		Min.	Typ.	Max.
C <sub>p</sub>	Coupling capacitance between shorted pins and mounting tab in the case	40		pF
d <sub>s,d<sub>A</sub></sub>	pin - pin	1.7		mm
d <sub>s,d<sub>A</sub></sub>	pin - backside metal	5.5		mm
Weight		9		g

**P - CHANNEL**

Symbol	Test Conditions	Maximum Ratings		
		Min.	Typ.	Max.
V <sub>DSS</sub>	T <sub>J</sub> = 25°C to 150°C	- 100		V
V <sub>DGR</sub>	T <sub>J</sub> = 25°C to 150°C, R <sub>GS</sub> = 1MΩ	- 100		V
V <sub>GSS</sub>	Continuous	± 20		V
V <sub>GSM</sub>	Transient	± 30		V
I <sub>D25</sub>	T <sub>C</sub> = 25°C	- 54		A
I <sub>DM</sub>	T <sub>C</sub> = 25°C, pulse width limited by T <sub>JM</sub>	- 230		A
I <sub>A</sub>	T <sub>C</sub> = 25°C	- 38		A
E <sub>AS</sub>	T <sub>C</sub> = 25°C	1.0		J
P <sub>D</sub>	T <sub>C</sub> = 25°C	132		W

**Features**

- Silicon chip on Direct-Copper Bond (DCB) substrate
  - UL recognized package
  - Isolated mounting surface
  - 2500V electrical isolation
- Avalanche rated
- Low Q<sub>G</sub>
- Low Drain-to-Tab capacitance
- Low package inductance

**Advantages**


- Low gate drive requirement
- High power density
- Low drain to ground capacitance
- Fast switching

**Applications**

- DC and AC motor drives
- Class AB audio amplifiers
- Multi-phase DC to DC converters
- Industrial battery chargers
- Switching power supplies

Symbol	Test Conditions <sup>2</sup> ( $T_J = 25^\circ\text{C}$ unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
$\mathbf{BV}_{\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = -250\ \mu\text{A}$	- 100		V
$\mathbf{V}_{\text{GS(th)}}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = -250\ \mu\text{A}$	- 2.0		- 4.0 V
$\mathbf{I}_{\text{GSS}}$	$V_{\text{GS}} = \pm 20\text{ V}, V_{\text{DS}} = 0\text{V}$			$\pm 100\ \text{nA}$
$\mathbf{I}_{\text{DSS}}$	$V_{\text{DS}} = V_{\text{DSS}}, V_{\text{GS}} = 0\text{V}$ $T_J = 125^\circ\text{C}$			- 15 $\mu\text{A}$ - 750 $\mu\text{A}$
$\mathbf{R}_{\text{DS(on)}}$	$V_{\text{GS}} = -10\text{V}, I_D = -38\text{A}$ , Note 1			24 $\text{m}\Omega$
$\mathbf{g}_{\text{fs}}$	$V_{\text{DS}} = -10\text{V}, I_D = -38\text{A}$ , Note 1	35	58	S
$\mathbf{C}_{\text{iss}}$	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = -25\text{V}, f = 1\text{MHz}$	13.7		nF
$\mathbf{C}_{\text{oss}}$		890		pF
$\mathbf{C}_{\text{rss}}$		275		pF
$t_{\text{d(on)}}$	<b>Resistive Switching Times</b> $V_{\text{GS}} = -10\text{V}, V_{\text{DS}} = 0.5 \cdot V_{\text{DSS}}, I_D = -38\text{A}$ $R_G = 1\Omega$ (External)	25		ns
$t_r$		40		ns
$t_{\text{d(off)}}$		52		ns
$t_f$		20		ns
$Q_{\text{g(on)}}$	$V_{\text{GS}} = -10\text{V}, V_{\text{DS}} = 0.5 \cdot V_{\text{DSS}}, I_D = -38\text{A}$	197		nC
$Q_{\text{gs}}$		65		nC
$Q_{\text{gd}}$		65		nC
$R_{\text{thJC}}$			0.95 $^\circ\text{C/W}$	
$R_{\text{thCS}}$		0.15		$^\circ\text{C/W}$

## ISOPLUS i4-Pak™ Outline

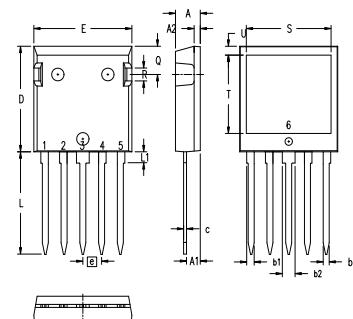

NOTE: Bottom heatsink meets 3000 Volts AC 1 sec isolation to the other pins.

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.102	.118	2.59	3.00
A2	.046	.085	1.17	2.16
b	.045	.055	1.14	1.40
b1	.058	.068	1.47	1.73
b2	.100	.110	2.54	2.79
C	.020	.029	0.51	0.74
D	.819	.840	20.80	21.34
E	.770	.799	19.56	20.29
e	.150 BSC		3.81 BSC	
L	.780	.840	19.81	21.34
L1	.083	.102	2.11	2.59
Q	.210	.244	5.33	6.20
R	.100	.180	2.54	4.57
S	.660	.690	16.76	17.53
T	.590	.620	14.99	15.75
U	.065	.080	1.65	2.03

Ref: IXYS CO 0077 R0

## Drain-Source Diode

## Characteristic Values

(T<sub>J</sub> = 25°C unless otherwise specified)

Symbol	Test Conditions <sup>2</sup>	Min.	Typ.	Max.
$I_s$	$V_{\text{GS}} = 0\text{V}$			- 54 A
$I_{\text{SM}}$	Repetitive, pulse width limited by T <sub>JM</sub>		- 304	A
$V_{\text{SD}}$	$I_F = -38\text{A}, V_{\text{GS}} = 0\text{V}$ , Note 1		- 1.3	V
$t_{\text{rr}}$	$I_F = -38\text{A}, di/dt = 100\text{A}/\mu\text{s}$	70		ns
$Q_{\text{RM}}$		215		nC
$I_{\text{RM}}$		- 6		A

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

## N - CHANNEL

Symbol	Test Conditions	Maximum Ratings		
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$	100	V	
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ , $R_{GS} = 1\text{M}\Omega$	100	V	
$V_{GSM}$	Transient	$\pm 20$	V	
$I_{D25}$	$T_C = 25^\circ\text{C}$	62	A	
$I_{DM}$	$T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$	300	A	
$I_A$	$T_C = 25^\circ\text{C}$	65	A	
$E_{AS}$	$T_C = 25^\circ\text{C}$	500	mJ	
$P_D$	$T_C = 25^\circ\text{C}$	89	W	

Symbol	Test Conditions <sup>2</sup> ( $T_J = 25^\circ\text{C}$ unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
$BV_{DSS}$	$V_{GS} = 0\text{V}$ , $I_D = 250\text{\mu A}$	100		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = 250\mu\text{A}$	2.5		4.5 V
$I_{GSS}$	$V_{GS} = \pm 20\text{ V}$ , $V_{DS} = 0\text{V}$		$\pm 200$	nA
$I_{DSS}$	$V_{DS} = V_{DSS}$ $V_{GS} = 0\text{V}$			5 $\mu\text{A}$ 250 $\mu\text{A}$
$R_{DS(on)}$	$V_{GS} = 10\text{V}$ , $I_D = 25\text{A}$ , (Note 1)			11 $\text{m}\Omega$
$g_{fs}$	$V_{DS} = 10\text{V}$ , $I_D = 60\text{A}$ , (Note 1)	55	93	S
$C_{iss}$ $C_{oss}$ $C_{rss}$	$V_{GS} = 0\text{V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$	5080		pF
		635		pF
		95		pF
$t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$	<b>Resistive Switching Times</b> $V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 25\text{A}$ $R_G = 5\Omega$ (External)	30		ns
		47		ns
		44		ns
		28		ns
$Q_{g(on)}$ $Q_{gs}$ $Q_{gd}$	$V_{GS} = 10\text{V}$ , $V_{DS} = 0.5 \cdot V_{DSS}$ , $I_D = 25\text{A}$	104		nC
		30		nC
		29		nC
$R_{thJC}$			1.4	$^\circ\text{C/W}$
$R_{thCS}$		0.15		$^\circ\text{C/W}$

## Source-Drain Diode

Characteristic Values  
 $T_J = 25^\circ\text{C}$  unless otherwise specified)

Symbol	Test Conditions <sup>3</sup>	Min.	Typ.	Max.
$I_s$	$V_{GS} = 0\text{V}$		62	A
$I_{SM}$	Repetitive, pulse width limited by $T_{JM}$		350	A
$V_{SD}$	$I_F = 25\text{A}$ , $V_{GS} = 0\text{V}$ , Note 1		1.0	V
$t_{rr}$ $Q_{RM}$ $I_{RM}$	$I_F = 25\text{A}$ , $-di/dt = 100\text{A}/\mu\text{s}$ $V_R = 50\text{V}$ , $V_{GS} = 0\text{V}$	67 160 4.7	ns nC A	

Note 1: Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .

**ADVANCE TECHNICAL INFORMATION**

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated objective result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by IXYS manufacturer:***

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [JANTX2N5237](#) [FCA20N60\\_F109](#) [FDZ595PZ](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [TPCC8103,L1Q\(CM](#)  
[MIC4420CM-TR](#) [VN1206L](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BUK954R8-60E](#)  
[NTE6400](#) [SQJ402EP-T1-GE3](#) [2SK2614\(TE16L1,Q\)](#) [2N7002KW-FAI](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [ECH8691-TL-W](#)  
[FCAB21350L1](#) [P85W28HP2F-7071](#) [DMN1053UCP4-7](#) [NTE221](#) [NTE222](#) [NTE2384](#) [NTE2903](#) [NTE2941](#) [NTE2945](#) [NTE2946](#) [NTE2960](#)  
[NTE2967](#) [NTE2969](#) [NTE2976](#) [NTE455](#) [NTE6400A](#) [NTE2910](#) [NTE2916](#) [NTE2956](#) [NTE2911](#) [DMN2080UCB4-7](#) [TK10A80W,S4X\(S](#)  
[SSM6P69NU,LF](#) [DMP22D4UFO-7B](#)