


HiPerRF™
Power MOSFETs
F-Class: MegaHertz Switching


N-Channel Enhancement Mode
Avalanche Rated
Low Q_g , Low Intrinsic R_g
High dV/dt , Low t_{rr}

IXFK55N50F
IXFX55N50F




V_{DSS} = 500V
 I_{D25} = 55A
 $R_{DS(on)}$ ≤ 85mΩ
 t_{rr} ≤ 250ns

TO-264 (IXFK)

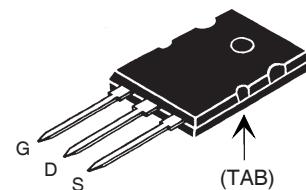

PLUS247 (IXFX)

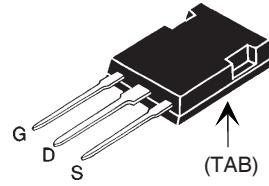

G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions	Maximum Ratings		
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	500		V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C , $R_{GS} = 1\text{M}\Omega$	500		V
V_{GSS}	Continuous	± 20		V
V_{GSM}	Transient	± 30		V
I_{D25}	$T_C = 25^\circ\text{C}$	55		A
I_{DM}	$T_C = 25^\circ\text{C}$, Pulse Width Limited by T_{JM}	220		A
I_{AR}	$T_C = 25^\circ\text{C}$	55		A
E_{AS}	$T_C = 25^\circ\text{C}$	3		J
dv/dt	$I_S \leq I_{DM}$, $di/dt \leq 100 \text{ A}/\mu\text{s}$, $V_{DD} \leq V_{DSS}$ $T_J \leq 150^\circ\text{C}$, $R_G = 2 \Omega$	10		V/ns
P_D	$T_C = 25^\circ\text{C}$	560		W
T_J		-55 ... +150		°C
T_{JM}		150		°C
T_{stg}		-55 ... +150		°C
T_L	1.6mm (0.062 in.) from Case for 10s	300		°C
T_{SOLD}	Plastic Body for 10s	260		°C
M_d	Mounting Torque (TO-264)	1.13/10		Nm/lb.in.
F_c	Mounting Force (PLUS247)	20..120 / 4.5..27		N/lb.
Weight	TO-264 PLUS247	10 6		g

Symbol	Test Conditions ($T_J = 25^\circ\text{C}$ Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
BV_{DSS}	$V_{GS} = 0\text{V}$, $I_D = 1\text{mA}$	500		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 8\text{mA}$	3.0		5.5 V
I_{GSS}	$V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$			± 200 nA
I_{DSS}	$V_{DS} = V_{DSS}$ $V_{GS} = 0\text{V}$			100 μA 3 mA
$R_{DS(on)}$	$V_{GS} = 10\text{V}$, $I_D = 0.5 \cdot I_{D25}$, Note 1			85 mΩ

Features

- RF capable Mosfets
- Rugged polysilicon gate cell structure
- Double metal process for low gate resistance
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
 - easy to drive and to protect
- Fast intrinsic rectifier


Applications

- DC-DC converters
- Switched-mode and resonant-mode power supplies, >500kHz switching
- DC choppers
- Pulse generation
- Laser drivers

Advantages

- PLUS 247™ package for clip or spring mounting
- Space savings
- High power density

Symbol	Test Conditions (T _J = 25°C Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
g_{fs}	V _{DS} = 10V, I _D = 0.5 • I _{D25} , Note 1	22	33	S
C_{iss}		6700		pF
C_{oss}	V _{GS} = 0V, V _{DS} = 25V, f = 1MHz	1250		pF
C_{rss}		330		pF
t_{d(on)}	Resistive Switching Times V _{GS} = 10V, V _{DS} = 0.5 • V _{DSS} , I _D = 0.5 • I _{D25} R _G = 1Ω (External)	24		ns
t_r		20		ns
t_{d(off)}		45		ns
t_f		9.6		ns
Q_{g(on)}	V _{GS} = 10V, V _{DS} = 0.5 • V _{DSS} , I _D = 0.5 • I _{D25}	195		nC
Q_{gs}		50		nC
Q_{gd}		95		nC
R_{thJC}			0.21	°C/W
R_{thCS}		0.15		°C/W

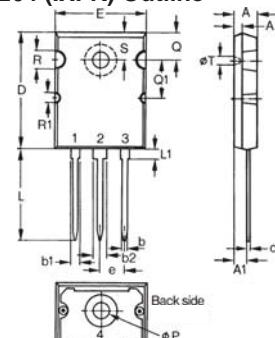
TO-264 (IXFK) Outline


Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46	BSC	.215	BSC
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

Source-Drain Diode

Symbol	Test Conditions (T _J = 25°C, Unless Otherwise Specified)	Characteristic Values		
		Min.	Typ.	Max.
I _s	V _{GS} = 0V		55	A
I _{SM}	Repetitive, Pulse Width Limited by T _{JM}		220	A
V _{SD}	I _F = 25A, V _{GS} = 0V, Note 1		1.5	V
t_{rr}	I _F = 25A, -di/dt = 100A/μs V _R = 100V, V _{GS} = 0V		250	ns
Q_{RM}		1		μC
I_{RM}		10		A

Note: 1. Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %
 2. See IXFN55N50F Datasheet for Characteristic Curves

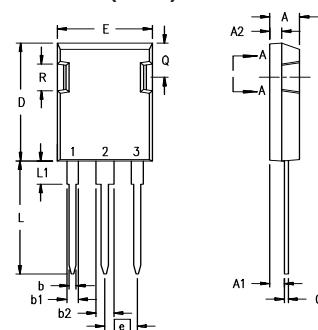PLUS 247™ (IXFX) Outline


Terminals: 1 - Gate
 2 - Drain (Collector)
 3 - Source (Emitter)
 4 - Drain (Collector)

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.83	5.21	.190	.205
A ₁	2.29	2.54	.090	.100
A ₂	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b ₁	1.91	2.13	.075	.084
b ₂	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45	BSC	.215	BSC
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	.244
R	4.32	4.83	.170	.190

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

Fig. 1. Output Characteristics at 25°C

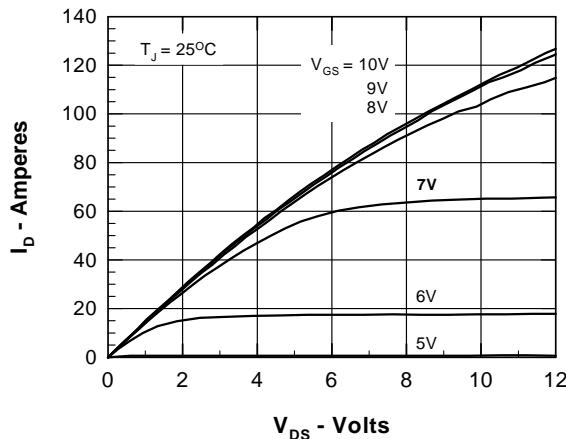


Fig. 3. $R_{DS(ON)}$ vs. Drain Current

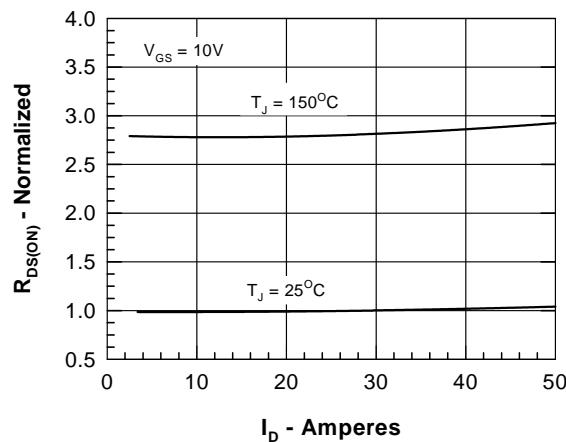


Fig. 5. Drain Current vs. Case Temperature

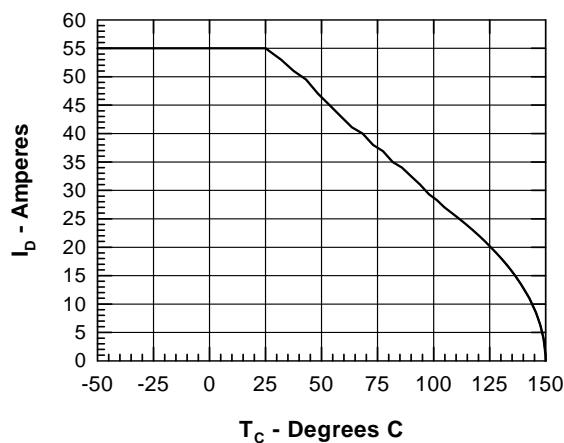


Fig. 2. Output Characteristics at 125°C

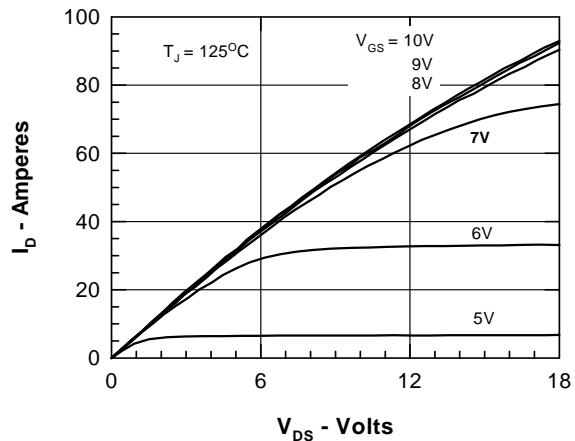


Fig. 4. $R_{DS(ON)}$ vs. T_J

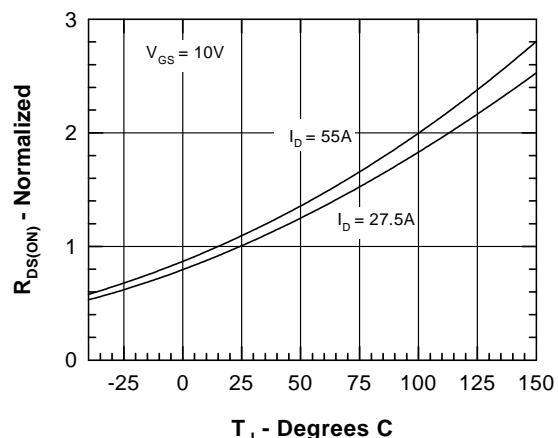


Fig. 6. Admittance Curves

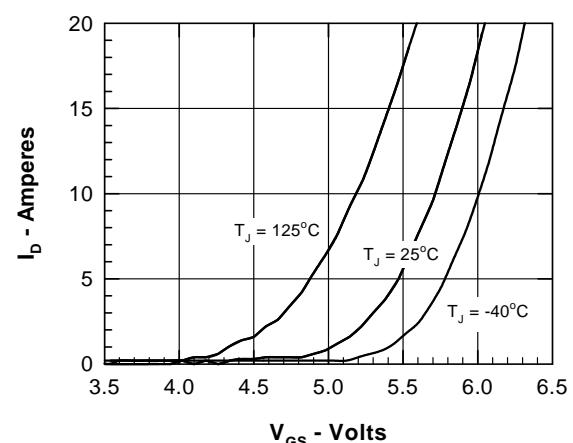


Fig. 7. Gate Charge Characteristic Curve

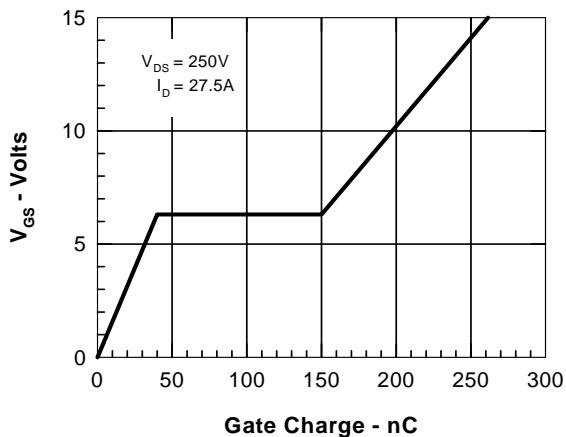


Fig. 8. Capacitance Curves

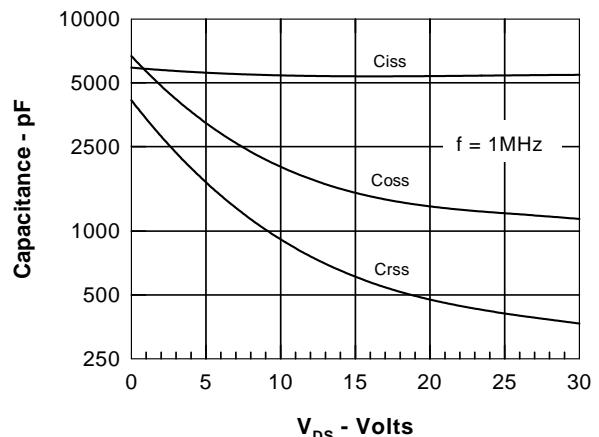


Fig. 9. Source Current vs. Source to Drain Voltage


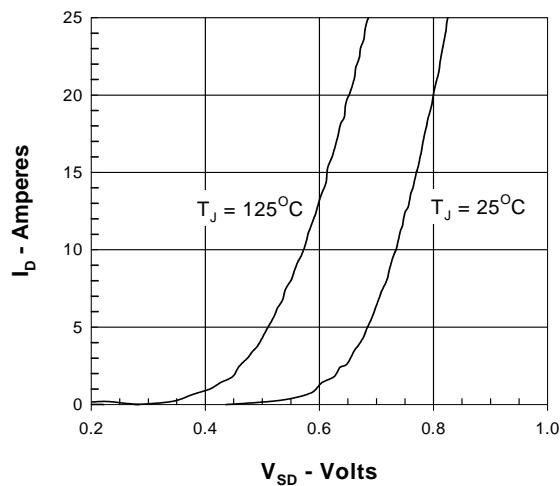


Fig. 10. Thermal Impedance

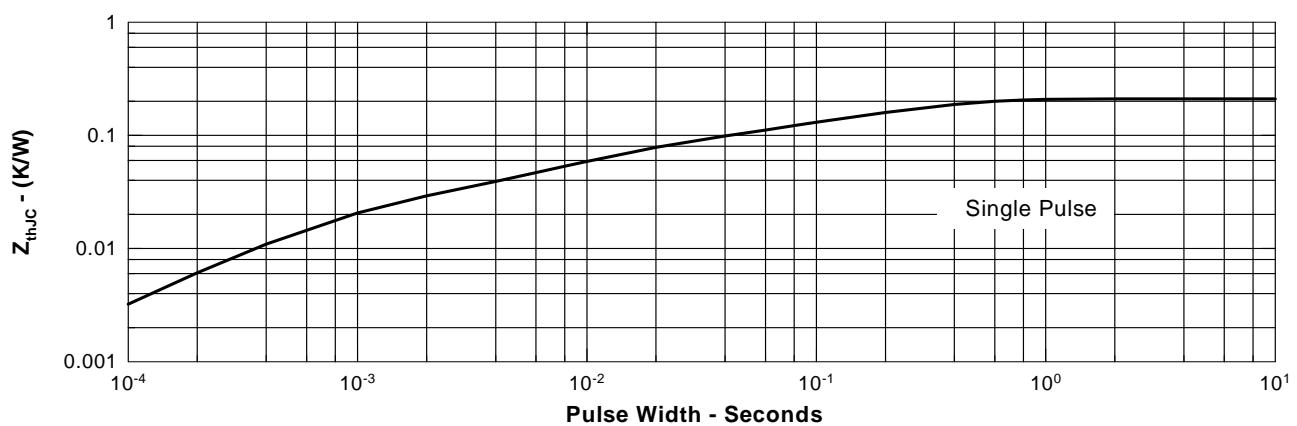

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MOSFET](#) category:

Click to view products by [IXYS](#) manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [IRFD120](#) [JANTX2N5237](#) [FCA20N60_F109](#) [FDZ595PZ](#) [2SK2545\(Q,T\)](#) [405094E](#) [423220D](#) [TPCC8103,L1Q\(CM](#)
[MIC4420CM-TR](#) [VN1206L](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [SSM6J414TU,LF\(T](#) [751625C](#) [BUK954R8-60E](#) [NTE6400](#) [SQJ402EP-](#)
[T1-GE3](#) [2SK2614\(TE16L1,Q\)](#) [2N7002KW-FAI](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#) [ECH8691-TL-W](#) [FCAB21350L1](#) [P85W28HP2F-](#)
[7071](#) [DMN1053UCP4-7](#) [NTE221](#) [NTE222](#) [NTE2384](#) [NTE2903](#) [NTE2941](#) [NTE2945](#) [NTE2946](#) [NTE2960](#) [NTE2967](#) [NTE2969](#) [NTE2976](#)
[NTE6400A](#) [NTE2910](#) [NTE2916](#) [NTE2956](#) [NTE2911](#) [DMN2080UCB4-7](#) [TK10A80W,S4X\(S](#) [SSM6P69NU,LF](#) [DMP22D4UFO-7B](#)
[DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)