

# Thyristor Module

$V_{RRM} = 2 \times 2400 \text{ V}$


$I_{TAV} = 104 \text{ A}$

$V_T = 1.46 \text{ V}$

## Phase leg


Part number

**MCC94-24io1B**

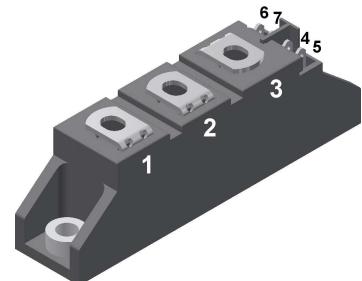

Backside: isolated

 E72873

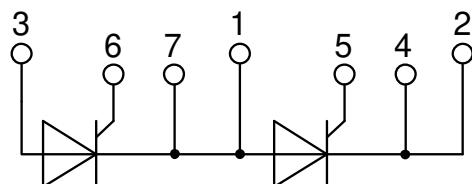

### Features / Advantages:

- Thyristor for line frequency
- Planar passivated chip
- Long-term stability
- Direct Copper Bonded Al<sub>2</sub>O<sub>3</sub>-ceramic

### Applications:

- Line rectifying 50/60 Hz
- Softstart AC motor control
- DC Motor control
- Power converter
- AC power control
- Lighting and temperature control

### Package: TO-240AA

- Isolation Voltage: 4800 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

### Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

**Thyristor**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM/DSM}$	max. non-repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			2500	V
$V_{RRM/DRM}$	max. repetitive reverse/forward blocking voltage	$T_{VJ} = 25^\circ C$			2400	V
$I_{R/D}$	reverse current, drain current	$V_{R/D} = 2400 V$ $V_{R/D} = 2400 V$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		200 15	$\mu A$ mA
$V_T$	forward voltage drop	$I_T = 150 A$	$T_{VJ} = 25^\circ C$		1.44	V
		$I_T = 300 A$			1.74	V
		$I_T = 150 A$ $I_T = 300 A$	$T_{VJ} = 125^\circ C$		1.46 1.99	V
$I_{TAV}$	average forward current	$T_C = 85^\circ C$	$T_{VJ} = 125^\circ C$		104	A
$I_{T(RMS)}$	RMS forward current	180° sine			163	A
$V_{T0}$	threshold voltage	$r_T$ slope resistance } for power loss calculation only	$T_{VJ} = 125^\circ C$		0.85	V
	slope resistance				3.2	$m\Omega$
$R_{thJC}$	thermal resistance junction to case				0.22	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.2		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		455	W
$I_{TSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		1.70	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		1.84	kA
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		1.45	kA
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		1.56	kA
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$		14.5	$kA^2s$
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		14.0	$kA^2s$
		$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$	$T_{VJ} = 125^\circ C$		10.4	$kA^2s$
		$t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$V_R = 0 V$		10.1	$kA^2s$
$C_J$	junction capacitance	$V_R = 700 V$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	63		pF
$P_{GM}$	max. gate power dissipation	$t_p = 30 \mu s$	$T_C = 125^\circ C$		10	W
		$t_p = 300 \mu s$			5	W
					0.5	W
$P_{GAV}$	average gate power dissipation					
$(di/dt)_{cr}$	critical rate of rise of current	$T_{VJ} = 125^\circ C; f = 50 \text{ Hz}$ repetitive, $I_T = 250 A$			150	$A/\mu s$
		$t_p = 200 \mu s; di_G/dt = 0.45 A/\mu s;$				
		$I_G = 0.45 A; V = \frac{2}{3} V_{DRM}$ non-repet., $I_T = 104 A$			500	$A/\mu s$
$(dv/dt)_{cr}$	critical rate of rise of voltage	$V = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		1000	$V/\mu s$
		$R_{GK} = \infty$ ; method 1 (linear voltage rise)				
$V_{GT}$	gate trigger voltage	$V_D = 6 V$	$T_{VJ} = 25^\circ C$		1.5	V
			$T_{VJ} = -40^\circ C$		1.6	V
$I_{GT}$	gate trigger current	$V_D = 6 V$	$T_{VJ} = 25^\circ C$		150	mA
			$T_{VJ} = -40^\circ C$		200	mA
$V_{GD}$	gate non-trigger voltage	$V_D = \frac{2}{3} V_{DRM}$	$T_{VJ} = 125^\circ C$		0.25	V
$I_{GD}$	gate non-trigger current				10	mA
$I_L$	latching current	$t_p = 10 \mu s$	$T_{VJ} = 25^\circ C$		200	mA
		$I_G = 0.45 A; di_G/dt = 0.45 A/\mu s$				
$I_H$	holding current	$V_D = 6 V$ $R_{GK} = \infty$	$T_{VJ} = 25^\circ C$		150	mA
$t_{gd}$	gate controlled delay time	$V_D = \frac{1}{2} V_{DRM}$	$T_{VJ} = 25^\circ C$		2	$\mu s$
		$I_G = 0.45 A; di_G/dt = 0.45 A/\mu s$				
$t_q$	turn-off time	$V_R = 100 V; I_T = 150 A; V = \frac{2}{3} V_{DRM}$ $T_{VJ} = 100^\circ C$		185		$\mu s$
		$di/dt = 10 A/\mu s$ $dv/dt = 20 V/\mu s$ $t_p = 200 \mu s$				


**Package TO-240AA**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$I_{RMS}$	<i>RMS current</i>	per terminal			200	A
$T_{VJ}$	<i>virtual junction temperature</i>		-40		125	°C
$T_{op}$	<i>operation temperature</i>		-40		100	°C
$T_{stg}$	<i>storage temperature</i>		-40		125	°C
<b>Weight</b>				81		g
$M_D$	<i>mounting torque</i>		2.5		4	Nm
$M_T$	<i>terminal torque</i>		2.5		4	Nm
$d_{Spp/App}$	<i>creepage distance on surface / striking distance through air</i>	<i>terminal to terminal</i>	13.0	9.7		mm
$d_{Spb/Apb}$		<i>terminal to backside</i>	16.0	16.0		mm
$V_{ISOL}$	<i>isolation voltage</i>	$t = 1 \text{ second}$ $t = 1 \text{ minute}$ 50/60 Hz, RMS; $I_{ISOL} \leq 1 \text{ mA}$	4800 4000			V V

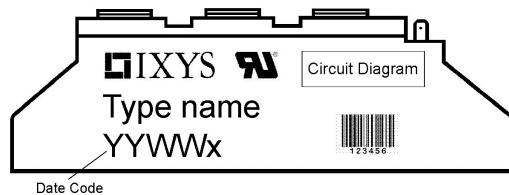


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MCC94-24io1B	MCC94-24io1B	Box	36	508871

**Equivalent Circuits for Simulation**
<sup>\*</sup>on die level


 $T_{VJ} = 125^\circ\text{C}$ 

**Thyristor**

$V_{0\max}$  threshold voltage 0.85 V  
 $R_{0\max}$  slope resistance \* 2 mΩ
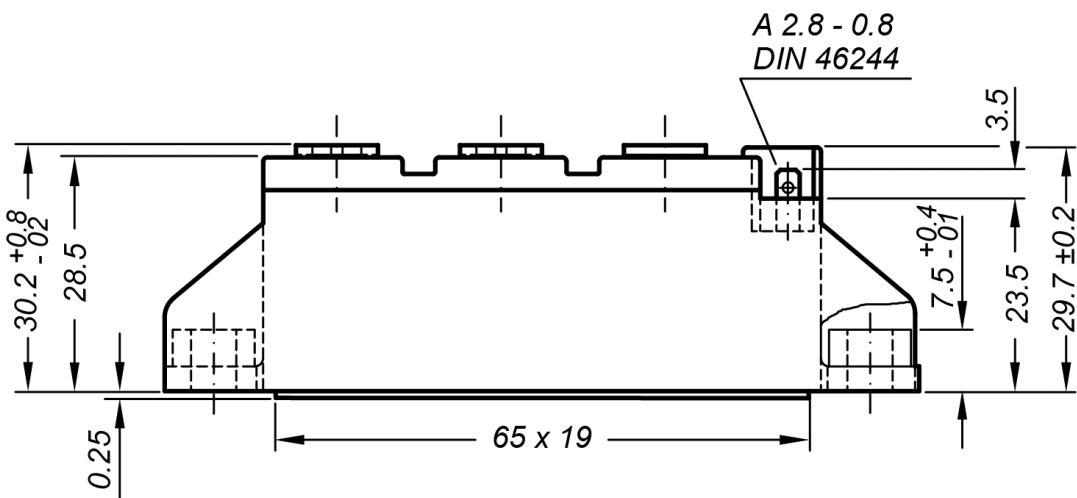
## **Outlines TO-240AA**

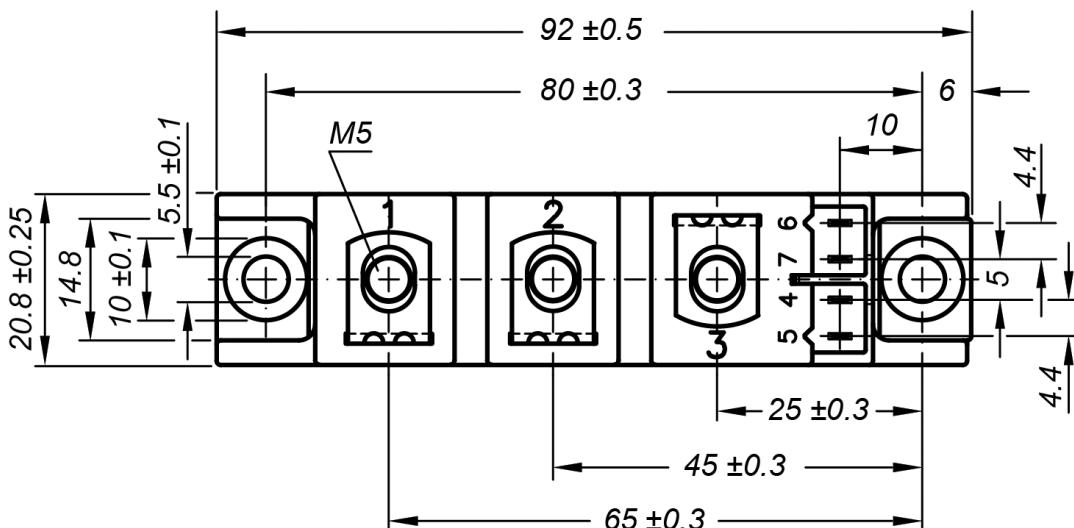


General tolerance: DIN ISO 2768 class „c“



#### Optional accessories for modules

Keyed gate/cathode twin plugs with wire length = 350 mm, gate = white, cathode = red  
Type ZY 200L (L = Left for pin pair 4/5)      } UL 758, style 3751  
Type ZY 200R (R = Right for pin pair 6/7)      }

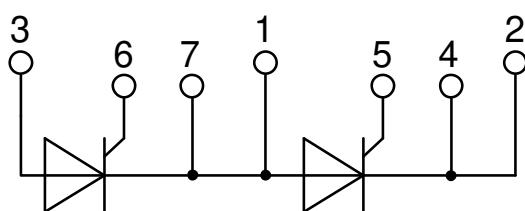

### Thyristor

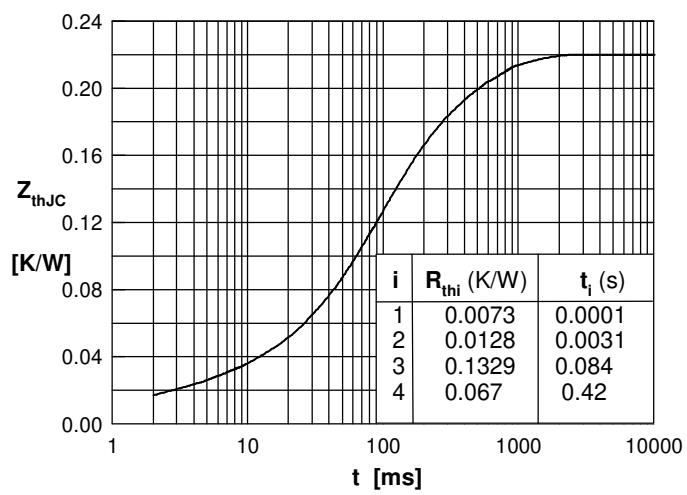
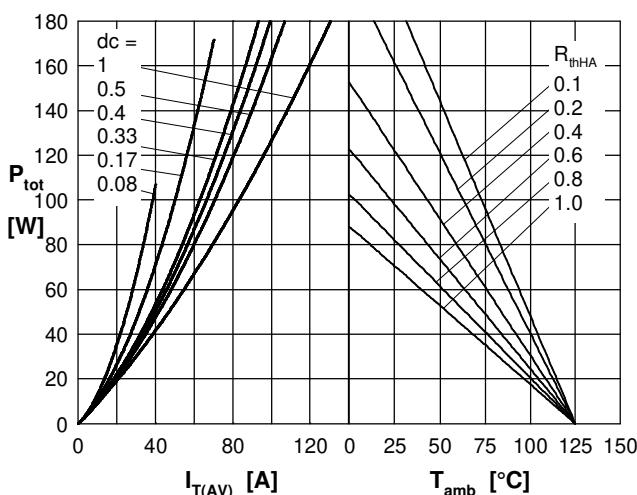
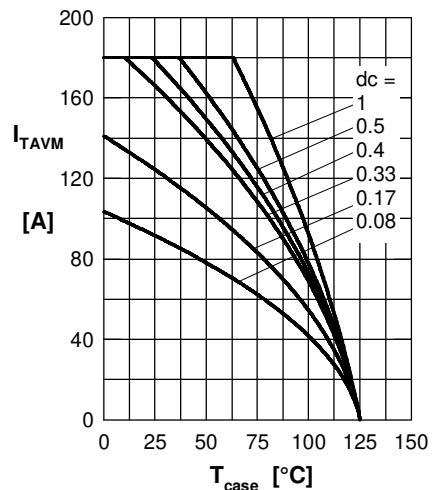
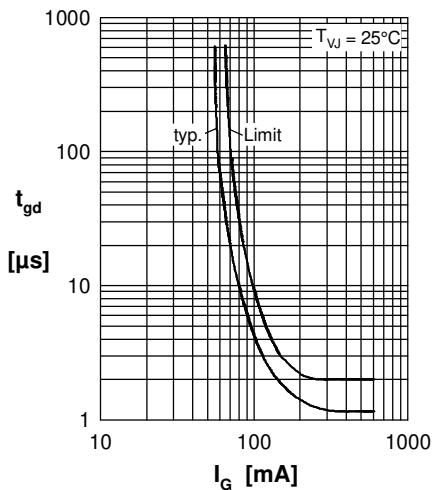
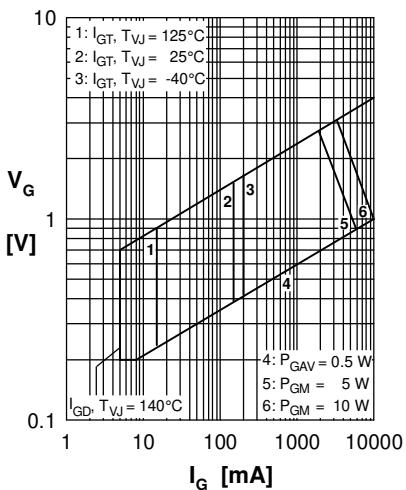
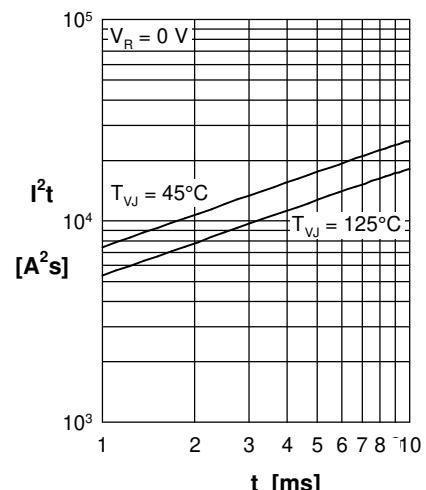
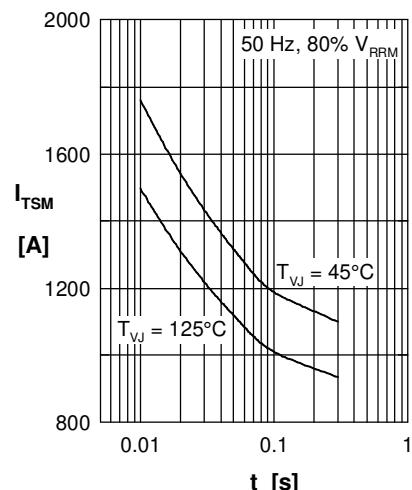
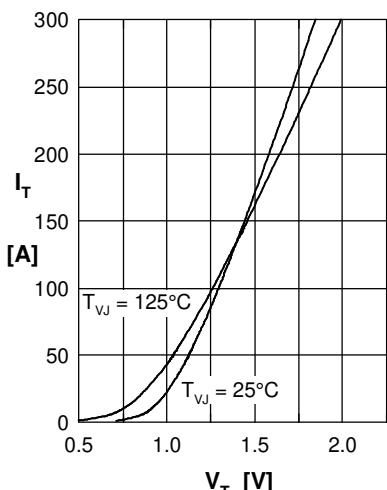


Fig. 7a Power dissipation versus direct output current  
Fig. 7b and ambient temperature

Fig. 8 Transient thermal impedance junction to case

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for SCR Modules category:***

***Click to view products by IXYS manufacturer:***

Other Similar products are found below :

[DT430N22KOF](#) [T1851N60TOH](#) [T420N12TOF](#) [T470N16TOF](#) [T901N36TOF](#) [TD162N16KOF-A](#) [TD330N16AOF](#) [T300N14TOF](#)  
[T390N16TOF](#) [T460N24TOF](#) [TD570N16KOF](#) [TD180N16KOF](#) [VSKE236/16PBF](#) [T1081N60TOH](#) [TT61N08KOF](#) [TT162N08KOF](#)  
[T2001N34TOF](#) [T901N35TOF](#) [T1080N02TOF](#) [T360N22TOF](#) [TZ810N22KOF](#) [T420N18TOF](#) [T420N14TOF](#) [TD305N16KOF](#) [T740N26TOF](#)  
[T360N24TOF](#) [T430N16TOF](#) [T300N16TOF](#) [TD520N22KOF](#) [TT305N16KOF](#) [TT270N16KOF](#) [TD600N16KOF](#) [T740N22TOF](#) [T640N12TOF](#)  
[T470N12TOF](#) [NTE5728](#) [ETZ1100N16P70HPSA1](#) [T430N18TOF](#) [TD700N22KOFHPSA1](#) [T3441N52TOH](#) [T2851N48TOH](#)  
[TD820N16KOFHPSA1](#) [MCD501-16IO2](#) [MCD501-18IO2](#) [SK 100 KQ 12](#) [SK 45 UT 16](#) [SKKT 106B12 E](#) [SKKT 27/16E](#) [VS-ST180S12P0VPBF](#) [PSET132/16](#)