

IGBT (NPT) Module

$$V_{CES} = 1200V$$

$$I_{C25} = 160A$$

$$V_{CE(sat)} = 2.2V$$

Boost Chopper + free wheeling Diode


Part number

MID145-12A3



Backside: isolated

 E72873



Features / Advantages:

- NPT IGBT technology
- low saturation voltage
- low switching losses
- switching frequency up to 30 kHz
- square RBSOA, no latch up
- high short circuit capability
- positive temperature coefficient for easy parallelling
- MOS input, voltage controlled
- ultra fast free wheeling diodes

Applications:

- AC motor drives
- Solar inverter
- Medical equipment
- Uninterruptible power supply
- Air-conditioning systems
- Welding equipment
- Switched-mode and resonant-mode power supplies
- Inductive heating, cookers
- Pumps, Fans


Package: Y4

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Soldering pins for PCB mounting
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

Free Wheeling Diode FWD				Ratings		
Symbol	Definition	Conditions	min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$			1200	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$			1200	V
I_R	reverse current, drain current	$V_R = 1200\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$		1	mA
		$V_R = 1200\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$		3	mA
V_F	forward voltage drop	$I_F = 100\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$		2.60	V
					3.10	V
		$I_F = 200\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$		2.00	V
					2.40	V
I_{FAV}	average forward current	$T_C = 80^{\circ}\text{C}$ DC current $d = 1$	$T_{VJ} = 150^{\circ}\text{C}$		95	A
V_{FO}	threshold voltage	} for power loss calculation only	$T_{VJ} = 150^{\circ}\text{C}$		1.30	V
r_F	slope resistance				7.5	mΩ
R_{thJC}	thermal resistance junction to case				0.18	K/W
R_{thCH}	thermal resistance case to heatsink			0.18		K/W
P_{tot}	total power dissipation		$T_C = 25^{\circ}\text{C}$		700	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$	$T_{VJ} = 45^{\circ}\text{C}$		700	A
C_J	junction capacitance	$V_R = 600\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		30	pF




Boost IGBT				Ratings					
Symbol	Definition	Conditions	min.	typ.	max.	Unit			
V_{CES}	collector emitter voltage	$T_{VJ} = 25^{\circ}\text{C}$			1200	V			
V_{GES}	max. DC gate voltage				± 20	V			
V_{GEM}	max. transient gate emitter voltage				± 30	V			
I_{C25}	collector current	$T_C = 25^{\circ}\text{C}$			160	A			
I_{C80}		$T_C = 80^{\circ}\text{C}$			110	A			
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$			700	W			
$V_{CE(sat)}$	collector emitter saturation voltage	$I_C = 100\text{A}; V_{GE} = 15\text{V}$			2.2	V			
					2.7	V			
$V_{GE(th)}$	gate emitter threshold voltage	$I_C = 4\text{mA}; V_{GE} = V_{CE}$	4.5	5.5	6.5	V			
I_{CES}	collector emitter leakage current	$V_{CE} = V_{CES}; V_{GE} = 0\text{V}$			6	mA			
					9	mA			
I_{GES}	gate emitter leakage current	$V_{GE} = \pm 20\text{V}$			400	nA			
$Q_{G(on)}$	total gate charge	$V_{CE} = 600\text{V}; V_{GE} = 15\text{V}; I_C = 100\text{A}$		480		nC			
$t_{d(on)}$	turn-on delay time	inductive load $V_{CE} = 600\text{V}; I_C = 100\text{A}$ $V_{GE} = \pm 15\text{V}; R_G = 6.8\ \Omega$							
t_r	current rise time						$T_{VJ} = 125^{\circ}\text{C}$	100	ns
$t_{d(off)}$	turn-off delay time						60	ns	
t_f	current fall time						600	ns	
E_{on}	turn-on energy per pulse						90	mJ	
E_{off}	turn-off energy per pulse						16	mJ	
R_{BSOA}	reverse bias safe operating area	$V_{GE} = \pm 15\text{V}; R_G = 6.8\ \Omega$ $V_{CEmax} = 1200\text{V}$							
I_{CM}							$T_{VJ} = 125^{\circ}\text{C}$	200	A
R_{SCSOA}	short circuit safe operating area	$V_{CEmax} = 1200\text{V}$ $V_{CE} = 1200\text{V}; V_{GE} = \pm 15\text{V}$ $R_G = 6.8\ \Omega; \text{non-repetitive}$							
t_{SC}	short circuit duration						$T_{VJ} = 125^{\circ}\text{C}$	10	μs
I_{SC}	short circuit current						330	A	
R_{thJC}	thermal resistance junction to case				0.18	K/W			
R_{thCH}	thermal resistance case to heatsink				0.18	K/W			
Boost Diode BD									
V_{RRM}	max. repetitive reverse voltage	$T_{VJ} = 25^{\circ}\text{C}$			1200	V			
I_{F25}	forward current	$T_C = 25^{\circ}\text{C}$			150	A			
I_{F80}		$T_C = 80^{\circ}\text{C}$			95	A			
V_F	forward voltage	$I_F = 100\text{A}$			2.60	V			
					1.90	V			
I_R	reverse current	$V_R = V_{RRM}$			1	mA			
					1.5	mA			
Q_{rr}	reverse recovery charge	$V_R = 600\text{V}$ $-di_F/dt = 600\text{A}/\mu\text{s}$ $I_F = 100\text{A}; V_{GE} = 0\text{V}$							
I_{RM}	max. reverse recovery current						$T_{VJ} = 125^{\circ}\text{C}$	8.5	μC
t_{rr}	reverse recovery time						62	A	
E_{rec}	reverse recovery energy						200	ns	
R_{thJC}	thermal resistance junction to case				0.45	K/W			
R_{thCH}	thermal resistance case to heatsink				0.45	K/W			

Package Y4				Ratings		
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			300	A
T_{VJ}	virtual junction temperature		-40		150	°C
T_{op}	operation temperature		-40		125	°C
T_{stg}	storage temperature		-40		125	°C
Weight					108	g
M_D	mounting torque		2.25		2.75	Nm
M_T	terminal torque		4.5		5.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	14.0	10.0		mm
$d_{Spb/Apb}$		terminal to backside	16.0	16.0		mm
V_{ISOL}	isolation voltage	t = 1 second			3600	V
		t = 1 minute	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA		3000	V

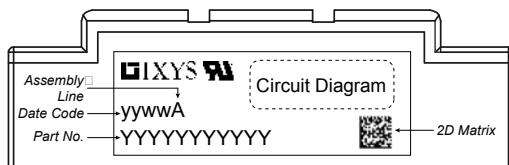

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	MID145-12A3	MID145-12A3	Box	6	474215

Outlines Y4

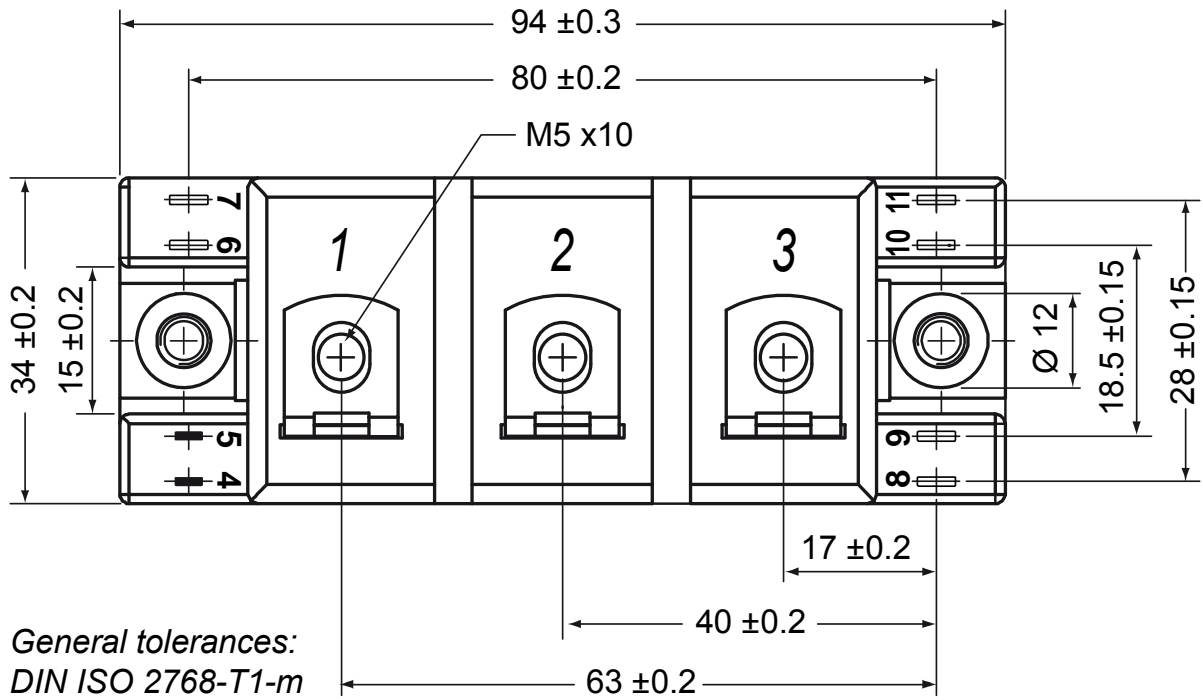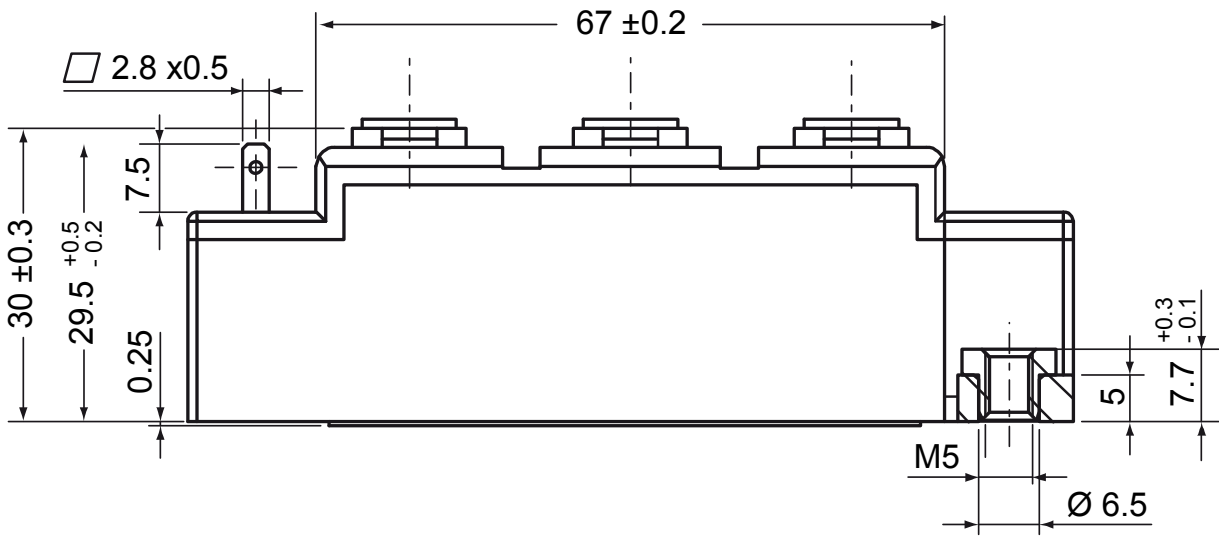

Boost IGBT

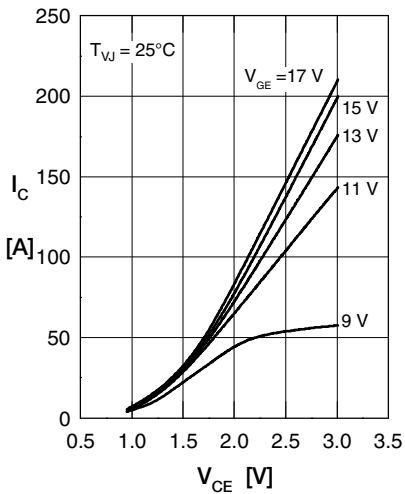


Fig. 1 Typ. output characteristics

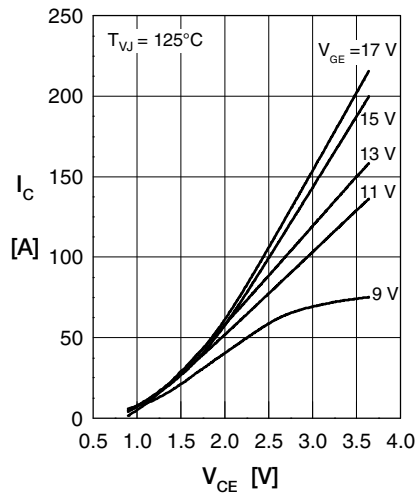


Fig. 2 Typ. output characteristics

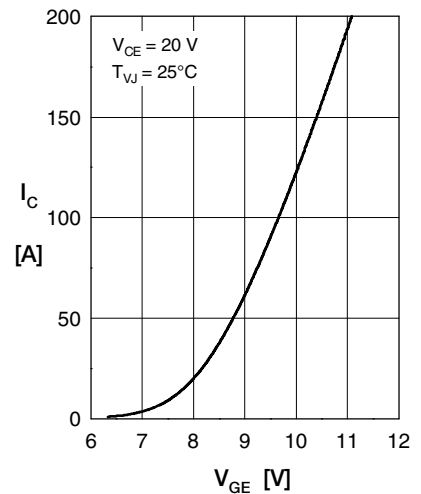


Fig. 3 Typ. transfer characteristics

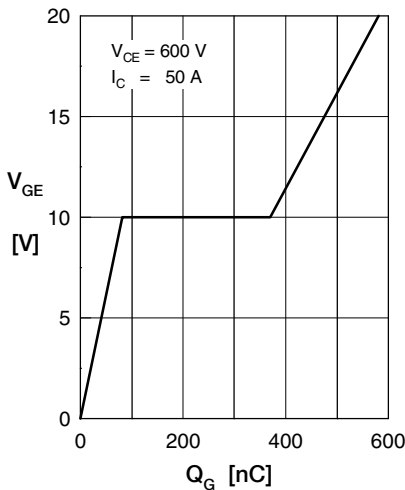


Fig. 4 Typ. turn-on gate charge

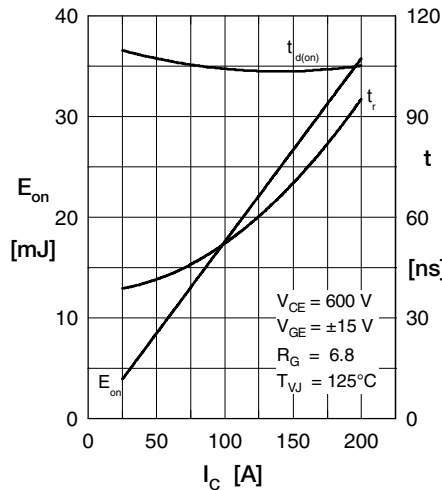


Fig. 5 Typ. turn on energy & switching times versus collector current

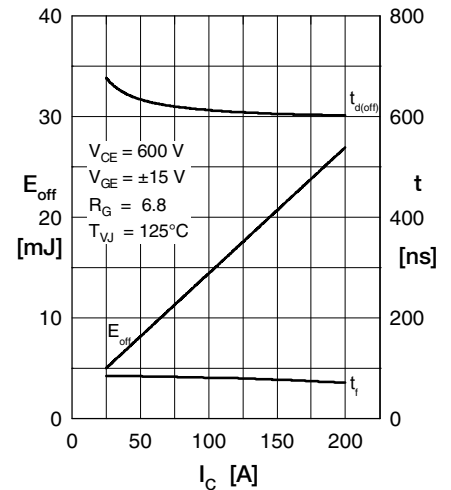


Fig. 6 Typ. turn off energy & switching times versus collector current

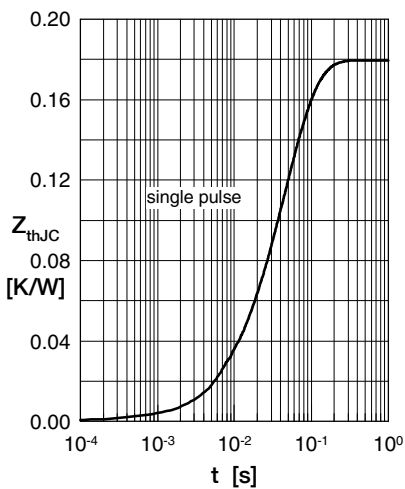


Fig. 12 Typical transient thermal impedance

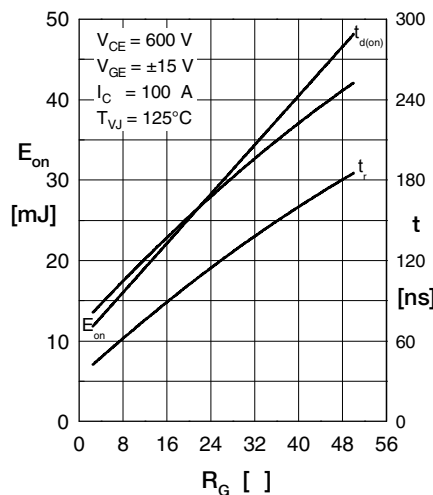


Fig. 9 Typ. turn on energy & switching times versus gate resistor

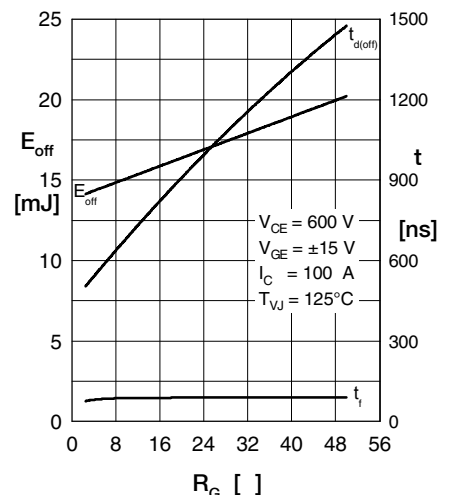


Fig. 9 Typ. turn off energy & switching times versus gate resistor

Boost Diode BD

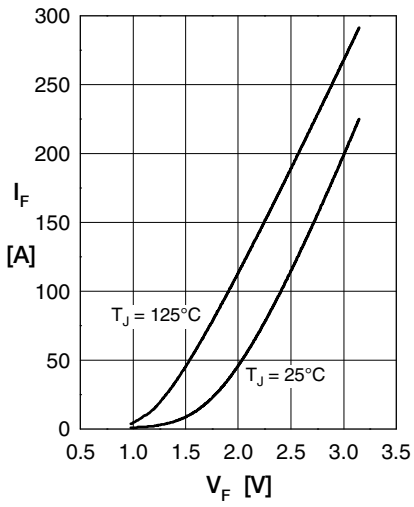


Fig. 1 Typ. Forward current vs. V_F

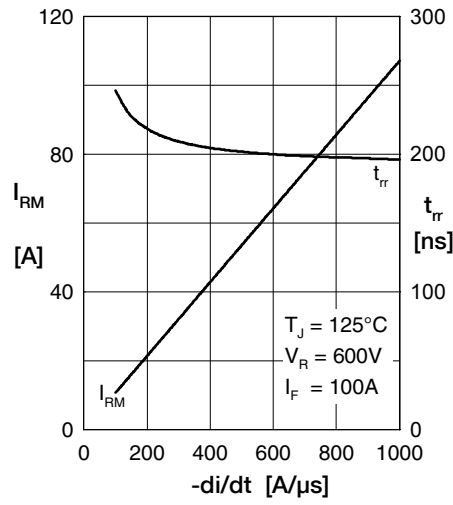


Fig. 2 Typ. peak reverse current I_{RM} versus di/dt

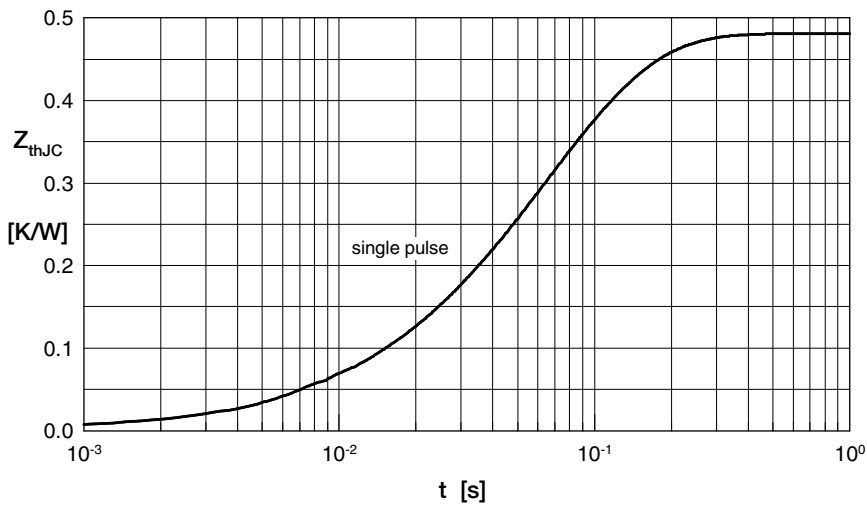


Fig. 3 Typ. transient thermal impedance junction to case

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IGBT Modules category](#):

Click to view products by [IXYS manufacturer](#):

Other Similar products are found below :

[F3L400R07ME4_B22](#) [F4-50R07W2H3_B51](#) [FB15R06W1E3](#) [FB20R06W1E3_B11](#) [FD1000R33HE3-K](#) [FD400R33KF2C-K](#)
[FD401R17KF6C_B2](#) [FD-DF80R12W1H3_B52](#) [FF200R06YE3](#) [FF300R12KE4_E](#) [FF450R12ME4P](#) [FF600R12IP4V](#) [FP10R06W1E3_B11](#)
[FP20R06W1E3](#) [FP50R12KT3](#) [FP75R07N2E4_B11](#) [FS10R12YE3](#) [FS150R07PE4](#) [FS150R12PT4](#) [FS200R12KT4R](#) [FS50R07N2E4_B11](#)
[FZ1000R33HE3](#) [FZ1800R17KF4](#) [DD250S65K3](#) [DF1000R17IE4](#) [DF1000R17IE4D_B2](#) [DF1400R12IP4D](#) [DF200R12PT4_B6](#)
[DF400R07PE4R_B6](#) [BSM75GB120DN2_E3223c-Se](#) [F3L300R12ME4_B22](#) [F3L75R07W2E3_B11](#) [F4-50R12KS4_B11](#)
[F475R07W1H3B11ABOMA1](#) [FD1400R12IP4D](#) [FD200R12PT4_B6](#) [FD800R33KF2C-K](#) [FF1200R17KP4_B2](#) [FF300R17KE3_S4](#)
[FF300R17ME4_B11](#) [FF401R17KF6C_B2](#) [FF650R17IE4D_B2](#) [FF900R12IP4D](#) [FF900R12IP4DV](#) [STGIF7CH60TS-L](#) [FP50R07N2E4_B11](#)
[FS100R07PE4](#) [FS150R07N3E4_B11](#) [FS150R17N3E4](#) [FS150R17PE4](#)