



HiPerFET™ Power Module

High dv/dt, Low t_{rr} , HDMOS™ Family

VMO 60-05F

$V_{DSS} = 500 \text{ V}$
 $I_{D25} = 60 \text{ A}$
 $R_{DS(on)} = 65 \text{ m}\Omega$

Preliminary Data

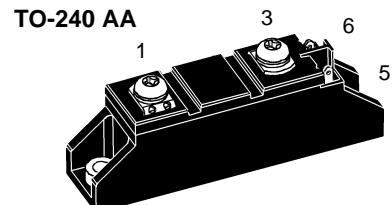

1 = Drain
 5 = Gate
 3 = Source
 6 = Kelvin Source

Symbol	Conditions	Maximum Ratings		
V_{DSS}	$T_J = 25^\circ\text{C}$ to 150°C	500		V
V_{DGR}	$T_J = 25^\circ\text{C}$ to 150°C ; $R_{GS} = 10 \text{ k}\Omega$	500		V
V_{GS}	Continuous	± 20		V
V_{GSM}	Transient	± 30		V
I_{D25}	$T_c = 25^\circ\text{C}$	60		A
I_{D100}	$T_c = 100^\circ\text{C}$	37		A
I_{DM}	$T_c = 25^\circ\text{C}$, $t_p = 10 \mu\text{s}$, pulse width limited by T_{JM}	240		A
P_{tot}	$T_c = 25^\circ\text{C}$	590		W
T_J		-40 ... +150		$^\circ\text{C}$
T_{JM}		150		$^\circ\text{C}$
T_{stg}		-40 ... +125		$^\circ\text{C}$
V_{ISOL}	$50/60 \text{ Hz}, t = 1 \text{ min}$	3000		V~
	$I_{ISOL} \leq 1 \text{ mA}, t = 1 \text{ s}$	3600		V~
M_d	Mounting torque(M5 or 10-32 UNF) Terminal connection torque (M5)	2.5-4.0/22-35 Nm/lb.in. 2.5-4.0/22-35 Nm/lb.in.		
Weight	Typical including screws	90		g

Features

- International standard package
- Direct copper bonded Al_2O_3 ceramic base plate
- Isolation voltage 3600 V~
- Low $R_{DS(on)}$ HDMOS™ process

Applications

- Switched-mode and resonant-mode power supplies
- Uninterruptible power supplies (UPS)
- DC servo and robot drives
- DC choppers

Advantages

- Easy to mount with two screws
- Space and weight savings
- High power density
- Low losses

Symbol	Conditions	Characteristic Values			
		($T_J = 25^\circ\text{C}$, unless otherwise specified)	min.	typ.	max.
V_{DSS}	$V_{GS} = 0 \text{ V}$	500			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 24 \text{ mA}$	2		4	V
I_{GSS}	$V_{GS} = \pm 20 \text{ V DC}$, $V_{DS} = 0$			500	nA
I_{DSS}	$V_{DS} = V_{DSS}$, $V_{GS} = 0 \text{ V}$, $T_J = 25^\circ\text{C}$ $V_{DS} = 0.8 \cdot V_{DSS}$, $V_{GS} = 0 \text{ V}$, $T_J = 125^\circ\text{C}$			600 μA	
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$, $I_D = 0.5 \cdot I_{D25}$ Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2 \%$	65		75	$\text{m}\Omega$


Data per MOSFET unless otherwise stated.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2000 IXYS All rights reserved

Symbol	Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
g_{fs}	$V_{DS} = 10 \text{ V}; I_D = 0.5 \cdot I_{D25}$ pulsed	30	60	S
C_{iss} C_{oss} C_{rss}	$V_{GS} = 0 \text{ V}, V_{DS} = 25 \text{ V}, f = 1 \text{ MHz}$	12.6 1.35 0.405	nF nF nF	
$t_{d(on)}$ t_r $t_{d(off)}$ t_f	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$ $R_G = 1 \Omega$ (External), resistive load	50 45 250 30	ns ns ns ns	
Q_g Q_{gs} Q_{gd}	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 \cdot I_{D25}$	405 90 180	nC nC nC	
R_{thJC} R_{thCH}	heatsink compound applied	0.2	0.21	K/W K/W
d_s d_A a	Creepage distance on surface Strike distance through air Allowable acceleration	12.7 9.6 50	mm mm m/s^2	

Dimensions in mm (1 mm = 0.0394")

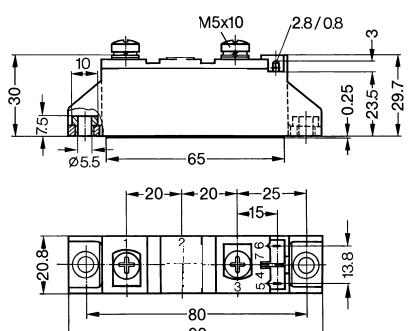

Symbol	Conditions	Characteristic Values ($T_J = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
I_s	$V_{GS} = 0 \text{ V}$		60	A
I_{SM}	Repetitive; pulse width limited by T_{JM}		240	A
V_{SD}	$I_F = I_s; V_{GS} = 0 \text{ V}$, Pulse test, $t \leq 300 \mu\text{s}$, duty cycle $d \leq 2\%$		1.5	V
t_{rr}	$I_F = I_s, -di/dt = 100 \text{ A}/\mu\text{s}, V_{DS} = 100 \text{ V}, V_{GS} = 0 \text{ V}$		250	ns

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Discrete Semiconductor Modules category:

Click to view products by IXYS manufacturer:

Other Similar products are found below :

[M252511FV](#) [M254043](#) [DD260N12K-A](#) [DD380N16A](#) [DDB6U144N16R](#) [DDB6U145N16L](#) [DR7306](#) [APT20M11JFLL](#) [APT2X101DL40J](#)
[APT2X21DC60J](#) [APT2X30D40J](#) [APT2X30D60J](#) [APT2X31DQ120J](#) [APT39M60J](#) [APT47M60J](#) [APT50DF170HJ](#) [APT50M50JLL](#)
[APT50M75JLLU3](#) [APT50N60JCCU2](#) [APT58M80J](#) [APT80F60J](#) [DZ540N26K](#) [B522F-2-YEC](#) [MSTC90-16](#) [MT16HTF12864AZ-800G1](#)
[MT18HTF12872PZ-667G1](#) [MT18HTF25672FDZ-667H1D6](#) [MT18HTF25672PZ-80EH1](#) [MT18RTF25672FDZ-667H1D6](#)
[MT36HTF51272FZ-667H1D4](#) [MT36HTF51272FZ-667H1D6](#) [MT8HTF12864HTZ-667H1](#) [MT9HTF6472PZ-667G1](#) [MT9HVF12872PZ-80EH1](#) [MT9HVF6472PZ-667G1](#) [ND104N16K](#) [25.163.0653.1](#) [25.163.2453.0](#) [25.163.4253.0](#) [25.190.2053.0](#) [25.194.3453.0](#) [25.320.4853.1](#)
[25.320.5253.1](#) [25.325.3653.1](#) [25.326.3253.1](#) [25.326.3553.1](#) [25.330.1653.1](#) [25.330.4753.1](#) [25.330.5253.1](#) [25.334.3253.1](#)