

Recently there has been increasing demand for high-speed and high-capacity transmission in devices as they become higher in performance. The JF08 Series connector harness is excellent at carrying high-speed serial transmission such as LVDS and PCI-Express, and it is also ideally suited for the next generation high-speed interface, V-by-One®HS.

 $^{*}\text{V-by-One}\ensuremath{\mathbb{B}}\xspace\text{HS}$ is the trademark of THine Electronics, Inc.

Features

Can mate with FI-R Series connectors

Strong mechanical lock


Easy operability with ample mating guides and large side lock buttons

Ideally suited for the next generation high-speed transmission, V-by-One®HS

EMI control with shield layer on the FFC and metal shell on the connector


General Specification


Number of Contacts: 41, 51 positions Rated Current: AC, DC each 0.3 Amps/contact Contact Resistance: Maximum 40M ohm Insulation Resistance: Minimum of 100M ohm Dielectric Withstanding Voltage: AC250Vr.m.s per minute Pitch: 0.5mm Operating Temperature: $-40 \sim +80$ Impedance Connector: 100 ohm ± 15% FFC: 100 ohm ± 10%

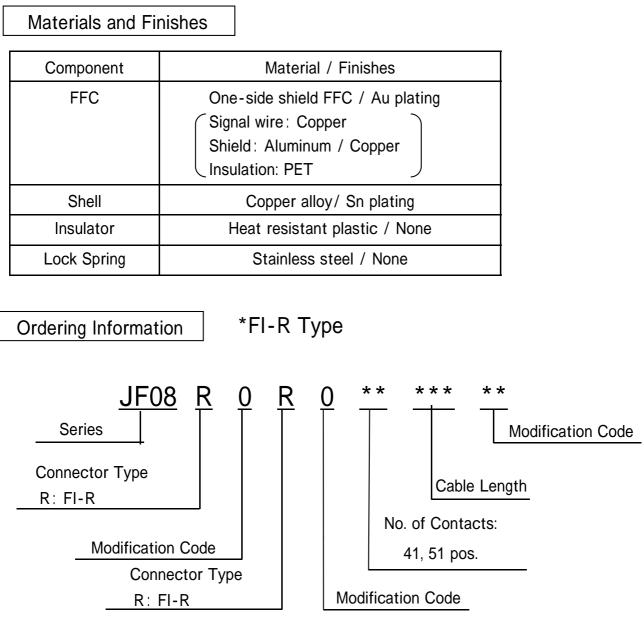



*Connectors are not sold individually.

Part Number	SJ Drawing	Remarks
JF08R0R041***MA	SJ110607	41 pos / Aluminum Shield
JF08R0R051***MA	SJ110607	51 pos / Aluminum Shield

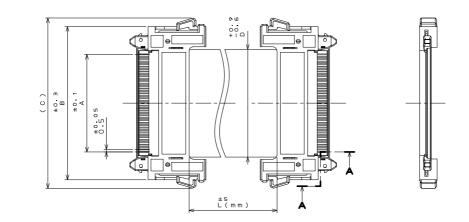



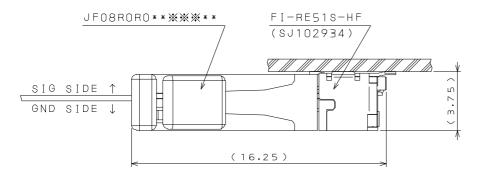

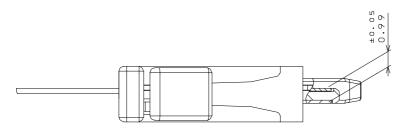

Dimensions

Unit:mm

ND. OF CONTACT	A ±0.1	B ^{±0.3}	(0)	D+0.9 -0.6
4 1	20	31.4	35	22.1
51	25	36.4	40	27.1

Product Line-up

No. of Contacts	FFC Length	Part Number
41	10cm	JF08R0R041010MA
	20cm	JF08R0R041020MA
	30cm	JF08R0R041030MA
	40cm	JF08R0R041040MA
	50cm	JF08R0R041050MA
	80cm	JF08R0R041080MA
	100cm	JF08R0R041100MA

No. of Contacts	FFC Length	Part Number
51	10cm	JF08R0R051010MA
	20cm	JF08R0R051020MA
	30cm	JF08R0R051030MA
	40cm	JF08R0R051040MA
	50cm	JF08R0R051050MA
	80cm	JF08R0R051080MA
	100cm	JF08R0R051100MA

Note: Above shows the standard lengths.

Please contact us concerning lengths not listed.

Japan Aviation Electronics Industry, Limited

Product Marketing Division Aobadai Building, 3-1-19, Aobadai, Meguro-ku, Tokyo 153-8539 Phone: +81-3-3780-2787 FAX: +81-3-3780-2946 **Notice:** Products shown in this brochure are made for the applications listed below. However, if the above-mentioned products are to be used in aerospace devices, marine cable-connection devices, atomic power control systems, medical equipment for lifesupport systems, or any other specific application requiring extremely high reliability, please contact JAE for further information.

Recommended applications: Computers, Office machines, Measuring devices, Telecommunication devices (Terminals, Mobile devices), AV devices, Household applications, FA devices, etc.

* The specifications in this brochure are subject to change without notice. Please contact JAE for information.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Ribbon Cables / IDC Cables category:

Click to view products by JAE manufacturer:

Other Similar products are found below :

 FSK-12A
 AWG28-10G
 EHJ3C
 EHJ4C
 cab-LVDV-PWR-10-15
 FSP-25A
 3365/15 (100FT)
 cab-LVDV-DAT-34-15
 49635-C62-S2
 1-3636

 600-5204
 92315-1408
 426171120-3
 3625/08 (100M)
 0044704
 2-1589735-3
 JSM015PP2DCC23N
 92301-0283
 ACL-eSSI-2
 92301-0718

 MMSDT-06-20-S-05.5-D-K-LDX
 IDD-04-G
 NM-2J2-051-PS1-JJAB
 1700/14SF (100FT)
 1700/26SF (100FT)
 1700/34SF (100FT)
 3801/09

 (100FT)
 119-885
 DS1057-06A282R-30.5
 DS1057-09A282R-30.5
 DS1057-12A282R-30.5
 DS1057-14A282R-76.5
 DS1057-20A282R-76.5

 DS1057-30A282R-76.5
 DS1057-34A282R-76.5
 DS1057-40A282R-76.5
 DS1057-60A282R-76.5
 DS1057-64A282R-76.5
 DS1058-08M28

 30.5
 DS1058-30M28-30.5
 3750/10 (100FT)
 0015712
 0015905
 S30109
 11203
 11243
 11262
 0037147
 0022512
 0022412