






WP26DK-S024VA3-R15000

Product Details

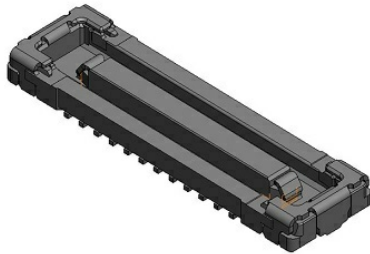

Part Number	WP26DK-S024VA3-R15000
Status	Active
Features	0.35mm pitch, Robust stacking type board-to-board (FPC) connector with power supply terminals, 24 pos., Receptacle
Number of Positions	24 pos. (Signal terminal, +2 Power terminals)
Contact Pitch	0.35 mm
Rated Current (AC, DC per pos.)	Signal: 0.3 A, Power Supply: 3.0 A
Rated Voltage (AC, DC)	50 V
Applications	Mobile phones, smartphones, wearable devices, tablet PCs, notebook PCs, digital cameras, VR/AR headsets and other small portable devices
Connector Type	Receptacle
Connector Style	Straight
Number of Rows	2 rows
PCB Mounting Method	Soldering (SMT)

Material of Contact	Copper alloy
Finish of Contact in Connecting Area	Gold plating
Finish of Contact in PCB Mounting Area	Gold plating
Material of Insulator	Heat-resistant plastic
PCB Mounted Height	0.60 mm
PCB Boardlock Feature	Hold-down (double as power contact)
Body Length	6.75 mm
Body Breadth	1.90 mm
Total Insertion Force	42 N msx.
Total Extraction Force	3.6 N min.
Operating Temperature Range	-40 Deg. C to +85 Deg. C
Mating Cycles	30 times
Packaging Type	Embossed tape packaging
Quantity in The Standard Packaging	15,000 pieces/reel
Documents	<div style="display: flex; flex-wrap: wrap; gap: 10px;"> <div style="border: 1px solid #ccc; padding: 5px; margin: 2px;">Catalog </div> <div style="border: 1px solid #ccc; padding: 5px; margin: 2px;">Drawings </div> <div style="border: 1px solid #ccc; padding: 5px; margin: 2px;">Drawings </div> <div style="border: 1px solid #ccc; padding: 5px; margin: 2px;">3D Models ></div> <div style="border: 1px solid #ccc; padding: 5px; margin: 2px;">PDF Download </div> </div>
Stock Search	<div style="border: 1px solid #ccc; padding: 5px; display: inline-block;">Stock Search ></div>
RoHS compliant	10 substances (2011/65/EU)
REACH compliant	219 substances (08/07/2021)

Environment Information	RoHS/Reach Certificate >
Combination	WP26DK-P024VA3-R15000
Remarks	

Notice

1. The values specified in this web site are only for reference. The products and their specifications are subject to change without notice. Contact our sales staff for further information before considering or ordering any of our products.

For purchase, a product specification must be agreed upon.

2. Users are requested to provide protection circuits and redundancy circuits to ensure safety of the equipment, and sufficiently review the suitability of JAE's products to the equipment.

3. The products presented in this web site are designed for the uses recommended below.

We strongly suggest you contact our sales staff when considering use of any of the products in any other way than the recommended applications or for a specific use that requires an extremely high reliability.

(1) Applications that require consultation:

- * Please contact us if you are considering use involving a quality assurance program that you specify or that is peculiar to the industry, such as:

Automotive electrical components, train control, telecommunications devices (mainline), traffic light control, electric power, combustion control, fire prevention or security systems, disaster evention equipment, etc.

- * We may separately give you our support with a quality assurance program that you specify, when you think of a use such as :

Aviation or space equipment, submarine repeaters, nuclear power control systems, medical equipment for life support, etc.

(2) Recommended applications include:

This site uses cookies to improve its performance, enhance your user experience and tailor advertising. By using this site you consent to the use of cookies as described in our usage policy unless you have changed your cookie settings. Please click [here](#) for more information.

Accept and Hide This Message

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [JAE](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [2-22603-0](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [FCN-268M036-G/BD](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#) [354184](#) [MIT-019-04-F-D-K](#) [P50-028-DDS-TG](#)