


- Low impedance and long life with standing 5000 hours load life.
- Suitable for electronic ballast, adaptor and switching power.
- Corresponding product to RoHS




SPECIFICATION

Item	Characteristic							
Operation Temperature Range	-40 ~ +105°C							
Rated Working Voltage	6.3 ~ 63VDC							
Capacitance Tolerance (120Hz 20°C)	±20%(M)							
Leakage Current (20°C)	$I \leq 0.01CV$ or $3 (\mu A)$ Whichever is greater after 2 minutes						I : Leakage Current (μA)	
							C : Rated Capacitance (μF)	
Surge Voltage (20°C)	W.V.	6.3	10	16	25	35	50	63
	S.V.	8	13	20	32	44	63	79
Dissipation Factor (tan δ) (120Hz 20°C)	Add 0.02 per 1000 μF for more than 1000 μF							
	W.V.	6.3	10	16	25	35	50	63
	tan δ	0.22	0.19	0.16	0.14	0.12	0.10	0.09
Low Temperature Stability	Impedance ratio at 120Hz							
	Rated Voltage (V)	6.3	10	16	25	35	50	63
	-25°C / +20°C	2	2	2	2	2	2	2
	-40°C / +20°C	3	3	3	3	3	3	3
Load Life	After hours ($\phi 5 \sim 6.3 \text{ mm}$ 2000 hours, $\phi 8 \text{ mm}$ 3000 hours, $\phi D \geq 10 \text{ mm}$ 5000 hours) application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage)							
	Capacitance Change	$\leq \pm 25\%$ of initial value						
	Dissipation Factor	$\leq 200\%$ of initial specified value						
	Leakage current	\leq initial specified value						
Shelf Life	At + 105°C no voltage application after 1000 hours the capacitor shall meet the following limits. (with voltage treatment)							
	Capacitance Change	$\leq \pm 20\%$ of initial value						
	Dissipation Factor	$\leq 200\%$ of initial specified value						
	Leakage current	$\leq 200\%$ of initial specified value						

DIMENSIONS (mm)

ϕD	5	6.3	8	10	12.5	16
F	2.0	2.5	3.5	5.0	5.0	7.5
d	0.5	0.5	0.6	0.6	0.6	0.8
α	1.5	1.5	1.5	1.5	2.0	2.0

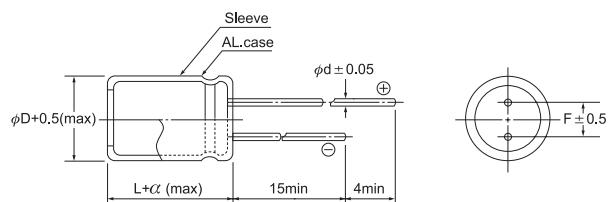

RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85	95	105
Multiplier	2.12	1.92	1.69	1.50	1.00

Frequency(Hz)	60	120	400	1k	10k	100k
W.V.	Multiplier					
6.3~16V	0.45	0.60	0.83	0.94	0.98	1.00
25~35V	0.38	0.50	0.75	0.90	0.97	1.00
50~63V	0.36	0.46	0.70	0.88	0.94	1.00

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100kHz
 Max ripple current : A(rms) 105°C 100kHz

μF	V(DC) φD	6.3			10			16		
		DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
10								5x11	1.300	0.09
56								5x11	0.300	0.25
100	5x11	0.300	0.25	5x11	0.300	0.25	6.3x11	0.250	0.36	
120	6.3x11	0.280	0.26	6.3x11	0.280	0.26	6.3x11	0.130	0.41	
220	6.3x11	0.130	0.41	6.3x11	0.130	0.41	8x11	0.120	0.58	
330	8x11	0.110	0.54	8x11	0.110	0.54	8x11	0.072	0.76	
470	8x11	0.072	0.76	8x11	0.072	0.76	8x15	0.056	1.00	
	8x15	0.056	1.00	8x15	0.056	1.00	10x12.5	0.053	1.03	
680	10x12.5	0.053	1.03	10x12.5	0.053	1.03	8x20	0.041	1.25	
820	8x20	0.050	1.05	8x20	0.050	1.05	10x16	0.038	1.43	
1000	8x20	0.041	1.25	8x20	0.041	1.25	10x20	0.036	1.45	
	10x16	0.038	1.43	10x16	0.038	1.43	10x20	0.023	1.82	
1200	10x20	0.023	1.82	10x20	0.023	1.82	10x25	0.022	2.15	
1500	10x25	0.022	2.15	10x25	0.022	2.15	12.5x20	0.021	2.36	
2200	12.5x20	0.021	2.36	12.5x20	0.021	2.36	12.5x25	0.018	2.77	
3300	12.5x25	0.018	2.77	12.5x25	0.018	2.77	12.5x35	0.015	3.40	
3900	12.5x30	0.016	3.29	12.5x30	0.016	3.29	16x25	0.016	3.46	
4700	16x20	0.018	3.14	16x20	0.018	3.14				
5600	12.5x35	0.015	3.40	12.5x35	0.015	3.40				
	16x25	0.016	3.46	16x25	0.016	3.46				

μF	V(DC) φD	25			35		
		DxL	IMP.	R.C.	DxL	IMP.	R.C.
10	5x11	1.030	0.13	5x11	0.800	0.17	
33	5x11	0.500	0.21	5x11	0.300	0.25	
47	5x11	0.300	0.25	6.3x11	0.280	0.27	
56	5x11	0.280	0.26	6.3x11	0.130	0.41	
100	6.3x11	0.130	0.41	8x11	0.125	0.50	
120	6.3x15	0.130	0.49	8x11	0.120	0.59	
150	8x11	0.110	0.54	8x11	0.072	0.76	
220	8x11	0.072	0.76	8x15	0.056	1.00	
	8x15	0.056	1.00	10x12.5	0.053	1.03	
330	10x12.5	0.053	1.03	10x16	0.038	1.43	
470	8x20	0.041	1.25	10x20	0.023	1.82	
560	10x20	0.036	1.50	10x25	0.022	2.15	
680	10x20	0.023	1.82	12.5x20	0.021	2.36	
820	10x25	0.022	2.15	12.5x20	0.020	2.45	
1000	12.5x20	0.021	2.36	12.5x25	0.018	2.77	
1200	12.5x20	0.019	2.46	12.5x30	0.016	3.29	
				16x20	0.018	3.14	
1500	12.5x25	0.018	2.77	12.5x35	0.015	3.40	
1800	12.5x30	0.016	3.29	16x25	0.016	3.46	
2200	16x20	0.018	3.14				
	12.5x35	0.015	3.40				

μF	V(DC) φD	50			63		
		DxL	IMP.	R.C.	DxL	IMP.	R.C.
22	5x11	0.340	0.24	6.3x11	0.726	0.22	
33	6.3x11	0.320	0.28	6.3x15	0.564	0.30	
47	6.3x11	0.310	0.34	8x11	0.453	0.38	
56	6.3x11	0.140	0.39	8x11	0.404	0.42	
100	8x11	0.074	0.72	10x16	0.264	0.54	
120	8x15	0.061	0.95	10x16	0.220	0.73	
150	10x12.5	0.061	0.98	10x16	0.187	0.80	
180	8x20	0.046	1.19	10x20	0.153	0.90	
220	10x16	0.042	1.37	10x25	0.133	1.08	
330	10x25	0.028	1.87	12.5x20	0.113	1.33	
470	12.5x20	0.027	2.05	12.5x25	0.091	1.66	
560	12.5x25	0.023	2.41	16x25	0.074	2.19	
680	12.5x30	0.021	2.86	16x25	0.059	2.24	
	12.5x35	0.019	2.96	16x32	0.054	2.72	
820	16x20	0.023	2.73				
1000	16x25	0.021	3.01	16x36	0.048	3.17	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminium Electrolytic Capacitors - Radial Leaded category:

Click to view products by Jamicon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVV5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV220M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)