


- High ripple current, low E.S.R. and long life
- Suitable for electronic ballast, adaptor and switching power
- Corresponding product to RoHS




● SPECIFICATION

Item	Characteristic								
Operation Temperature Range	-40 ~ +105°C				-25 ~ +105°C				
Rated Working Voltage	160 ~ 400VDC				450VDC				
Capacitance Tolerance (120Hz 20°C)	±20%(M)								
Leakage Current (20°C)	$I \leq 0.06CV + 10 (\mu A)$ Whichever is greater after 2 minutes				I : Leakage Current (μA) C : Rated Capacitance (μF) V : Working Voltage (V)				
Surge Voltage (20°C)	W.V.	160	200	250	350	400	450		
	S.V.	200	250	300	400	450	500		
Dissipation Factor (tan δ) (120Hz 20°C)	W.V.	160	200	250	350	400	450		
	tan δ	0.15	0.15	0.15	0.24	0.24	0.24		
Low Temperature Stability	Impedance ratio at 120Hz								
	Rated Voltage (V)		160 ~ 250			350 ~ 400		450	
	-25°C / +20°C		3			6		6	
	-40°C / +20°C		4			6		—	
Load Life	After hours ($\phi D \leq 8mm$ 3000 hours $\phi D \geq 10mm$ 5000 hours) application of W.V. and +105°C ripple current value, the capacitor shall meet the following limits. (DC + ripple peak voltage \leq rate working voltage)								
	Capacitance Change	$\leq \pm 20\%$ of initial value							
	Dissipation Factor	$\leq 200\%$ of initial specified value							
	Leakage current	\leq initial specified value							
Shelf Life	At + 105°C no voltage application after 1000 hours. The rated voltage shall be applied to the capacitors for a minimum of 30 minutes, at least 24 hrs and not more than 48 hrs before measurement. Cap & DF shall meet the limits for load life characteristics, Leakage current $\leq 500\%$ of the initial specified value								

● DIMENSIONS (mm)

ϕD	10	12.5	16	18
F	5.0	5.0	7.5	7.5
d	0.6	0.6	0.8	0.8
α	1.5	2.0	2.0	2.0

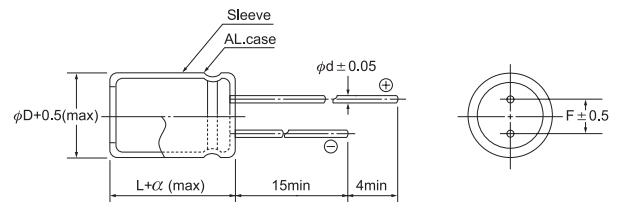

● RIPPLE CURRENT COEFFICIENTS

Temperature(°C)	65	75	85	95	105
Multiplier	1.80	1.65	1.50	1.25	1.00

Frequency (Hz)	120	1k	10k	100k
W.V.	Multiplier			
160~450	0.50	0.80	0.90	1.00

● CASE SIZE & MAX RIPPLE CURRENT

Case size : D x L (mm)
 Max impedance : Ω 20°C 100kHz
 Max ripple current : mA(rms) 105°C 100kHz

μF	V(DC) Item	160			200			250		
		DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
10						→	10x20	3.18	240	
22		10x20	1.47	350	10x20	1.47	350	12.5x20	1.74	380
33		10x20	1.15	430	12.5x20	1.15	460	12.5x25	1.35	510
47		12.5x20	0.92	550	12.5x20	0.92	550	12.5x25	1.08	610
68		12.5x25	0.71	730	12.5x25	0.71	730	16x25	0.84	730
100		16x25	0.59	890	16x25	0.59	890	16x32	0.70	980
150		16x32	0.41	1210	16x32	0.41	1210	18x32	0.49	1290
220		16x32	0.31	1460	18x36	0.31	1640	18x40	0.36	1730
330		18x36	0.25	2010						

μF	V(DC) Item	350			400			450		
		DxL	IMP.	R.C.	DxL	IMP.	R.C.	DxL	IMP.	R.C.
3.3						→	10x20	4.47	150	
4.7						→	12.5x20	3.77	190	
10		10x20	2.94	220	10x20	2.94	290	12.5x25	2.95	300
22		12.5x20	1.60	340	12.5x25	1.60	460	16x25	1.61	450
33		12.5x25	1.25	460	12.5x25	1.25	620	16x32	1.25	620
47		16x25	1.00	560	16x25	1.00	740	18x32	1.01	780
68		16x32	0.78	740	16x32	0.78	990	18x36	0.78	990
100		18x36	0.65	1010	18x36	0.65	1350			

All blank voltage on sleeve marking is the same voltage as " → "point to.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Jamicon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#) [NEV1000M6.3DE](#) [NEV100M16CB](#)
[NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)