

# **INSTRUCTION MANUAL**



**APS** 

Stand for AP250 Solder Feed Iron

This manual corresponds to the following reference:

#### AP-SF





**Stand Cable 1m** ...... 1 unit Ref. 0024227



Sponge for Modular Tool Stands ...... 1 unit Ref. S7034




Brass Wool ...... 1 unit Ref. CL6210




**Manual** ...... 1 unit Ref. 0027181



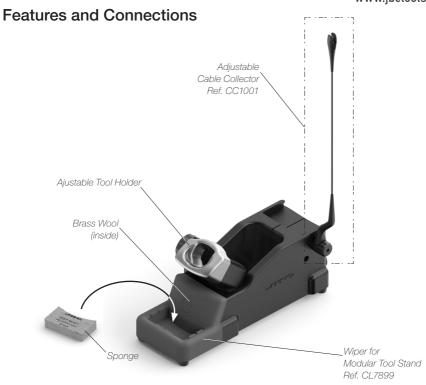



### **Assembly**

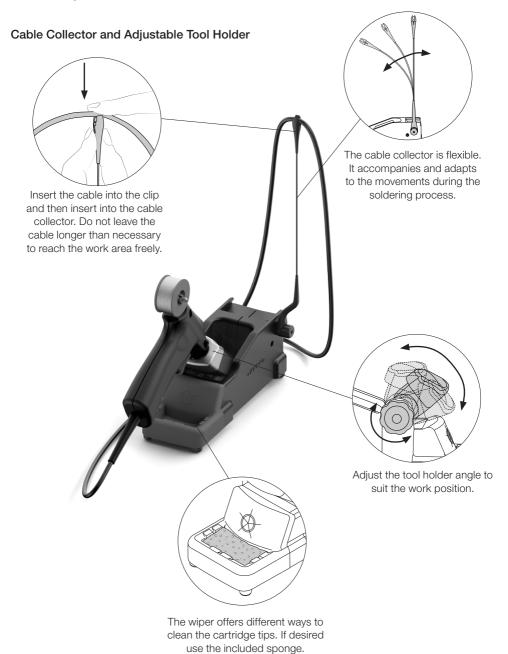



### Wiper

The integrated wiper offers different ways to clean the cartridge tips.

#### **Tapping**



Tap gently to remove excess solder.

#### Wiping



Use the slots to remove the remaining particles.

#### Sponge



The softest cleaning method. Keep the sponge damp with distilled water when working to avoid tip wear.

### Wiper and Brass Wool Replacement

The wiper and brass wool can easily be removed for cleaning or replacement when they are worn.



Lift the wiper at its front edge.




Remove the wiper by pulling it out.



Replace the brass wool with a new one when it is worn out.

Place the wiper back o replace them if desired.

#### **Accessories**

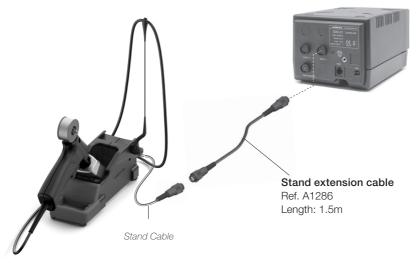

### Maintenance

Before carrying out maintenance or storage, always unplug the stand from the station and the tool.

- Use a damp cloth to clean the stand.
   Alcohol can be used only when cleaning the metal parts.
- Check periodically that the metal parts of the tool/stand are clean so that the station can check the tool's status.
- Periodically check all cables and tube connections.
- Replace any defective or damaged parts. Use original JBC spare parts only.
- Repairs should only be performed by a JBC authorized technical service.





### Safety



It is imperative to follow safety guidelines to prevent electric shock, injury, fire or explosion.

- Do not use the stand for any other purpose than soldering or rework.
- The power cord must be plugged into approved bases. Be sure that it is properly grounded before use. When unplugging it, hold the plug, not the wire.
- Do not work on electrically live parts.
- The tool should be placed in the stand when not in use in order to activate the sleep mode. The soldering tip, the metal part of the tool and the stand may still be hot even when the station is turned off. Handle with care, including when adjusting the stand position.
- Avoid the contact of flux with skin or eyes to prevent irritation.
- Be careful with the fumes produced when soldering.
- Keep your workplace clean and tidy. Wear appropriate protection glasses and gloves when working to avoid personal harm.
- Utmost care must be taken with liquid tin waste which can cause burns.
- This appliance can be used by children over the age of eight and also persons with reduced physical, sensory or mental capabilities or lack of experience provided that they have been given adequate supervision or instruction concerning use of the appliance and understand the hazards involved. Children must not play with the appliance.
- Maintenance must not be carried out by children unless supervised.

### **Specifications**

APS

Stand for AP250 Solder Feed Iron

Ref.: AP-SF

- Includes Sleep Mode - Total Net Weight 1462 g / 3.22 lb

- Package Dimensions / Weight 342 x 155 x 120 mm / 2022 g  $(L \times W \times H)$ 13.46 x 6.10 x 4.72 in / 4.46 lb

Complies with CE standards

**FSD** safe



#### Warranty

JBC's 2 year warranty covers this equipment against all manufacturing defects, including the replacement of defective parts and labour.

Warranty does not cover product wear or misuse. In order for the warranty to be valid, equipment must be returned, postage paid, to the dealer where it was purchased.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.







## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Soldering & Desoldering Stations category:

Click to view products by JBC Tools manufacturer:

Other Similar products are found below:

GS1116 WESD51D BH-010 T0058768747 CA0202 CA0201 WXD2N Q-7100-9000 ALFA T0058757898 WXD2010N T0058768762

145-2000-ESDN T0058758721N 0008473 WTL1000-1 700-3051-ESD 0051514699N 0051512199N T0058768725N ZD-415R ZD-415R-H

WELPB102 HR-2550A T130-1.0I T0051011299N CVC-7CN0004P CVC-9CH0025S CVC-8CH0010S CV-H5-DSHP CS-2F

WLSK3023C WLSK8023C BST-Z206 AP-SF AT-SA AT-SB DN-SF DR-SF DS-SF HD-SF 0016344 00B.SA.0 0120CDK 0551903

0DIG20A45 0IC1100A 0ICV2000XV 0T56 CL-SFE/1 FILTERS