


为您的产品保驾护航

PRODUCT DATASHEET

PTC Devices

A72 Series PTC Devices

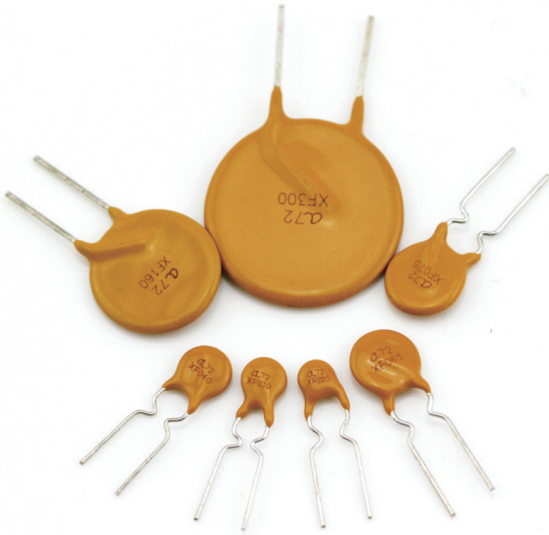




Description

The JDTFUSE A72 Series is designed to provide overcurrent protection to 72Vdc maximum voltage with a maximum 40A short circuit rating.

Features

- 72Vdc max voltage w/max 40A short circuit rating
- RoHS compliant, Lead-Free and HalogenFree*
- Resettable feature
- Ideal for a broad range of general electronics using a low voltage power supply

Agency Approvals

Agency	File Number
	E472196
Regulation	Standard
	2002/95/EC
	EN14582

Applications

- Load protection on wide range of low voltage power supplies
- Computers
- Computers peripherals
- General electronics

Performance Specification

Model	V _{max} (V _{dc})	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		
						Current (A)	Time (Sec)	R _{i min} (Ω)	R _{i max} (Ω)	R _{1max} (Ω)
A72-020	72	40	0.20	0.40	0.52	1.00	3.6	1.50	2.84	4.49
A72-025	72	40	0.25	0.50	0.52	1.25	3.2	1.00	1.95	3.00
A72-030	72	40	0.30	0.72	0.59	1.50	3.0	0.76	1.38	2.20
A72-040	72	40	0.40	0.80	0.66	2.00	3.8	0.45	0.88	1.40
A72-050	72	40	0.50	1.00	0.80	2.50	4.0	0.40	0.79	1.20
A72-065	72	40	0.65	1.30	0.90	3.25	5.3	0.27	0.50	0.74
A72-075	72	40	0.75	1.50	0.95	3.75	6.3	0.18	0.42	0.62
A72-090	72	40	0.90	1.80	1.00	4.50	7.2	0.14	0.33	0.49
A72-110	72	40	1.10	2.20	1.51	5.50	8.2	0.14	0.27	0.40
A72-135	72	40	1.35	2.70	1.71	6.75	9.6	0.12	0.21	0.32
A72-160	72	40	1.60	3.20	1.98	8.00	11.4	0.09	0.16	0.24
A72-185	72	40	1.85	3.70	2.10	9.25	12.6	0.08	0.14	0.21
A72-250	72	40	2.50	5.00	2.50	12.50	15.6	0.05	0.10	0.15
A72-300	72	40	3.00	6.00	2.80	15.00	19.8	0.04	0.08	0.12
A72-375	72	40	3.75	7.50	3.20	18.75	24.0	0.03	0.06	0.10
A72-500	72	40	5.00	10.0	4.20	25.00	30.0	0.015	0.05	0.08

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R_{i min/max} = Minimum/Maximum device resistance prior to tripping at 25°C.

R_{1max} = Maximum device resistance is measured one hour post reflow.


CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.

Environmental Specifications


Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±5% typical
Humidity aging	+85°C, 85% R.H. , 168 hours	±5% typical
Thermal shock	+85°C to -40°C, 20 times	±33% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-202, Method 201	No change
Ambient operating conditions : - 40 °C to +85 °C		
Maximum surface temperature of the device in the tripped state is 125 °C		

Thermal Derating Curve

Derating Curves for A72 Series

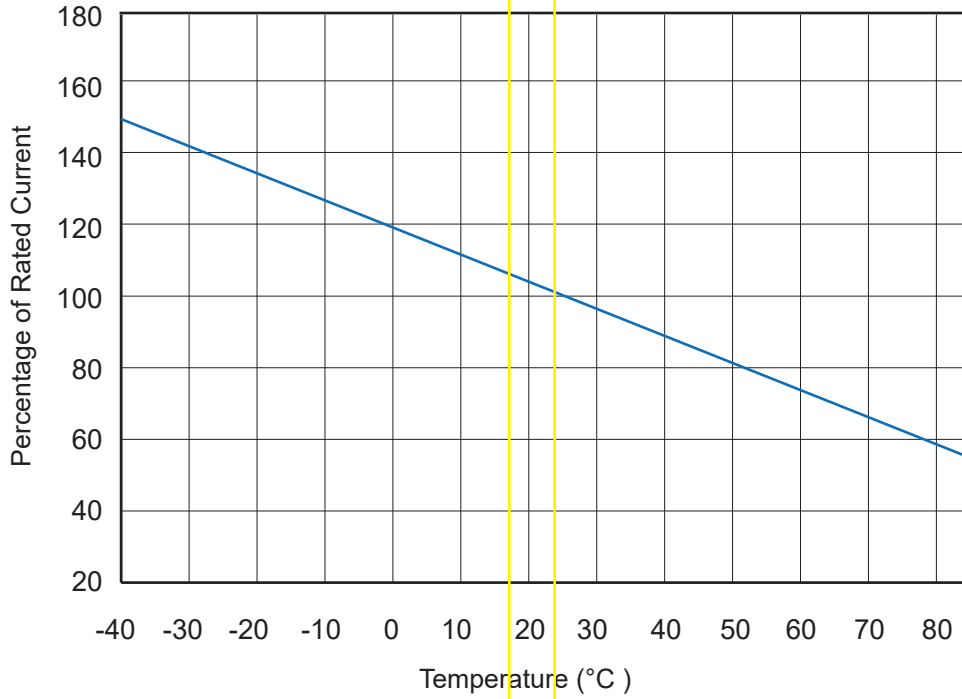


Average Time-Current Curve

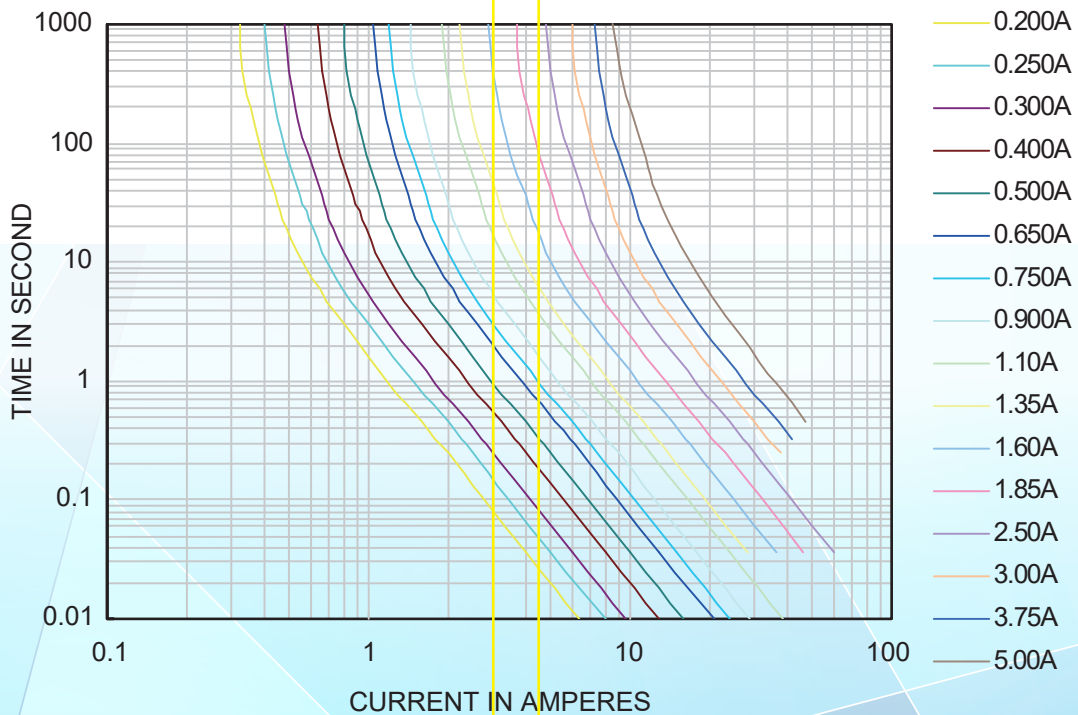

I_{hold} Versus Temperature

Model	Maximum ambient operating temperature (T _{mao}) vs. hold current (I _{hold})								
	- 40°C	- 20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
A72-020	0.31	0.27	0.24	0.20	0.16	0.14	0.13	0.11	0.08
A72-025	0.39	0.34	0.30	0.25	0.20	0.18	0.16	0.14	0.10
A72-030	0.47	0.41	0.36	0.30	0.24	0.22	0.19	0.16	0.12
A72-040	0.62	0.54	0.48	0.40	0.32	0.29	0.25	0.22	0.16
A72-050	0.78	0.68	0.60	0.50	0.41	0.36	0.32	0.27	0.20
A72-065	1.01	0.88	0.77	0.65	0.53	0.47	0.41	0.35	0.26
A72-075	1.16	1.02	0.89	0.75	0.61	0.54	0.47	0.41	0.30
A72-090	1.40	1.22	1.07	0.90	0.73	0.65	0.57	0.49	0.36
A72-110	1.71	1.50	1.31	1.10	0.89	0.79	0.69	0.59	0.44
A72-135	2.09	1.84	1.61	1.35	1.09	0.97	0.85	0.73	0.54
A72-160	2.48	2.18	1.90	1.60	1.30	1.15	1.01	0.86	0.64
A72-185	2.87	2.52	2.20	1.85	1.50	1.33	1.17	1.00	0.74
A72-250	3.88	3.40	2.98	2.50	2.03	1.80	1.58	1.35	1.00
A72-300	4.65	4.08	3.57	3.00	2.43	2.16	1.89	1.62	1.20
A72-375	5.81	5.10	4.46	3.75	3.04	2.70	2.36	2.03	1.50
A72-500	7.52	6.65	5.70	5.00	4.02	3.57	3.06	2.60	1.85

Soldering Parameters

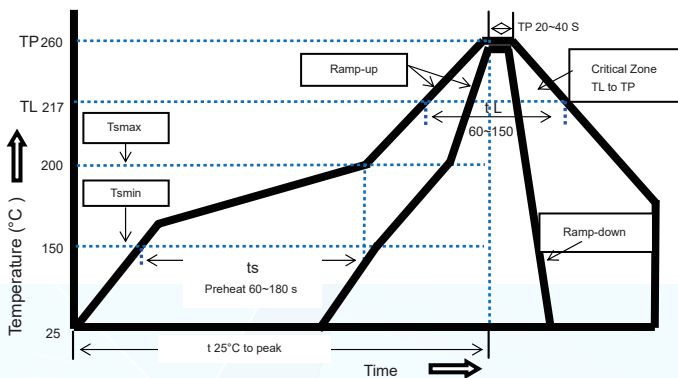

Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead-free

Recommended maximum paste thickness is 0.25mm

Devices can be cleaned using standard industry methods and solvents.

Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

Profile Feature

Average Ramp-Up Rate
(T_s max to T_p)

Preheat

- Temperature Min(T_s min)
- Temperature Max(T_s max)
- Time(T_s min to T_s max)

Time maintained above:

- Temperature(T_L)
- Time(t_L)

Peak Temperature(T_p)

Ramp-Down Rate

Time 25°C to Peak Temperature

Storage Condition

Pb-Free Assembly

3°C/second max.

150°C

200°C

60~180 seconds

217°C

60~150 seconds


260°C

6°C/second max.

8 minutes max

0°C~35°C, ≤70%RH

Physical Dimensions(mm.)

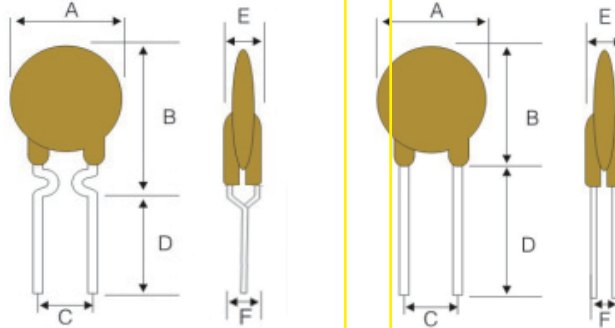

图片FIG1

图片FIG2

Model	A Max.	B Max.	C Typ.	D Min.	E Max.	F Typ.	FIG
A72-020	7.40	12.7	5.10±0.5	7.6	3.1	1.0	1
A72-025	7.40	12.7	5.10±0.5	7.6	3.1	1.0	1
A72-030	7.40	13.0	5.10±0.5	7.6	3.1	1.0	1
A72-040	7.80	16.2	5.10±0.5	7.6	3.1	1.2	1
A72-050	7.90	16.2	5.10±0.5	7.6	3.1	1.2	1
A72-065	9.70	17.8	5.10±0.5	7.6	3.1	1.5	1
A72-075	10.4	18.4	5.10±0.5	7.6	3.1	1.5	1
A72-090	11.7	18.4	5.10±0.5	7.6	3.1	1.5	1
A72-110	13.0	18.0	5.10±0.5	7.6	3.1	1.2	2
A72-135	14.5	19.6	5.10±0.5	7.6	3.1	1.2	2
A72-160	16.3	21.3	5.10±0.5	7.6	3.1	1.5	2
A72-185	17.8	22.9	5.10±0.5	7.6	3.1	1.5	2
A72-250	21.3	26.4	10.2±0.5	7.6	3.1	1.7	2
A72-300	23.9	28.6	10.2±0.5	7.6	3.1	2.0	2
A72-375	28.5	33.5	10.2±0.5	7.6	3.1	2.0	2
A72-500	29.5	34.5	10.7±0.5	7.6	3.1	1.4	2

PHYSICAL SPECIFICATIONS :

Materials : Leads A72-020 ~ 040: Tin-plJted copper-clJd steel, 0.205mm² (24JWG), Φ0.51mm(0.020 in).
A72-050 ~ 090: Tin-plJted copper , 0.205mm² (24JWG), Φ0.51mm(0.020 in).
A72-110 ~ 500: Tin-plJted copper , 0.52mm² (20JWG), Φ0.81mm(0.032 in).

Lead Solderability : MIL-STD-202, Method 208E

Packaging Quantity

Order information

Packing

A72	185	K or S	R or U	Model	Reel QTY	Bag QTY
Radial type	Hold	K= Kink leads	R= Tape &	A72-020 ~ A72-090	3000	500
	Current		Reel			
72 V	(A)	S= Straight	U= Bulk	A72-110 ~ A72-185	1500	500
		leads	packaged	A72-250 ~ A72-500	-	250

Tape & Reel packaging per EIA468-B standard.

Cross Reference

Model	Cross Reference		
	Tyco / PolySwitch®	Bourns / POLY-FUSE®	Polytronics / EVERFUSE®
A72-020	RXEF020	MF-R020	RLD72P020XF
A72-025	RXEF025	MF-R025	RLD72P025XF
A72-030	RXEF030	MF-R030	RLD72P030XF
A72-040	RXEF040	MF-R040	RLD72P040XF
A72-050	RXEF050	MF-R050	RLD72P050XF
A72-065	RXEF065	MF-R065	RLD72P065XF
A72-075	RXEF075	MF-R075	RLD72P075XF
A72-090	RXEF090	MF-R090	RLD72P090XF
A72-110	RXEF110	MF-RX110	RLD72P110XF
A72-135	RXEF135	MF-RX135	RLD72P135XF
A72-160	RXEF160	MF-RX160	RLD72P160XF
A72-185	RXEF185	MF-RX185	RLD72P185XF
A72-250	RXEF250	MF-RX250	RLD72P250XF
A72-300	RXEF300	MF-RX300	RLD72P300XF
A72-375	RXEF375	MF-RX375	RLD72P375XF
A72-500	RXEF500	MF-RX500	RLD72P500XF

“PolySwitch” is a registered trademark of Tyco Electronics.

“POLY-FUSE” is a registered trademark of Littelfuse, Inc.

“EVERFUSE” is a registered trademark of Polytronics Technology Corp.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Resettable Fuses - PPTC category](#):

Click to view products by [JDT manufacturer](#):

Other Similar products are found below :

[RF0077-000](#) [RF3256-000](#) [RF3281-000](#) [RF3301-000](#) [RF3344-000](#) [RF3350-000](#) [RF3382-000](#) [SMD125-2](#) [RF2531-000](#) [RF2873-000](#) [RF3060-000](#) [RF3288-000](#) [TR600-150Q-B-0.5-0.130](#) [RXE090](#) [5E4795/04-1502](#) [TRF250-080T-B-1.0-0.125](#) [SMD100-2](#) [NIS5452MT1TXG](#) [NIS5431MT1TXG](#) [SMD250-2](#) [0ZCM0001FF2G](#) [0ZCM0003FF2G](#) [0ZCM0004FF2G](#) [F95456-000](#) [RS30-090](#) [RS30-600](#) [RS30-700](#) [RS30-800](#) [RS30-900](#) [RS60RB-005](#) [RS60RB-010](#) [RS60RB-020](#) [RS60RB-025](#) [RS60RB-050](#) [RS60RB-075](#) [RS60RB-160](#) [RS60SB-110](#) [RS60SB-135](#) [SB250-145](#) [SB250-030](#) [SB250-040](#) [SB250-200](#) [SB250-600](#) [R60-375](#) [K60X005](#) [K250R120](#) [0ZCH0110AF2E](#) [0603L001/60YR](#) [0603L003/36YR](#) [SMD0805-020C-24V](#)