

为您的产品保驾护航

PRODUCT DATASHEET

PTC Devices · Surface Mount

JFC0402FS Series Fuse



Description

JFC0402FS Series Chip fuses set the industry standard for performance, reliability and quality. The solder-free design provides excellent on-off and temperature cycling characteristics and also makes our chip fuses more heat and shock tolerant than typical subminiature fuses.

Features


- Fast acting for excessive current
- Compatible with reflow and wave solder
- Ceramic and glass construction
- Excellent environmental integrity
- One time positive disconnect
- Lead Free and Halogen free material

Electrical Characteristics


Rated Current	1.0In	2.5In	3.5In
1A~4A 200mA~750mA	4 hour min.	5 sec max.	-
		-	5 sec max.

Dimensions

Drawing not to scale (Unit:mm)

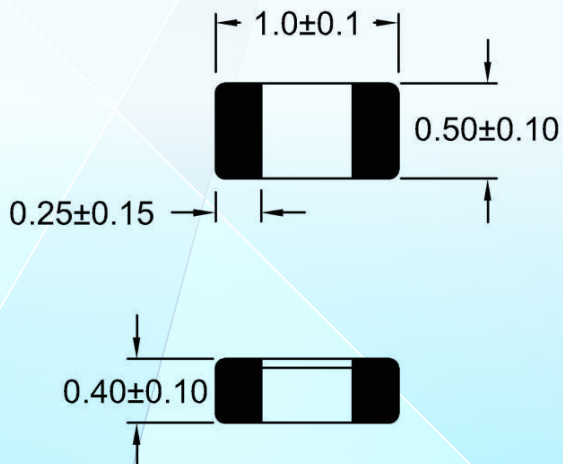

Recommended land pattern:

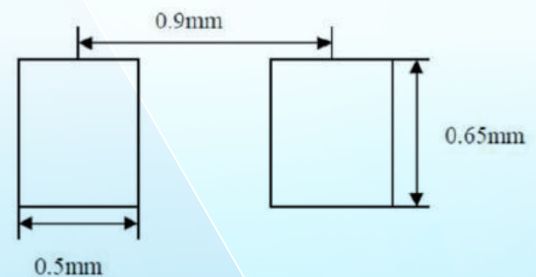



Performance Specifications

Part No.	Rated Current (A)	Rated Voltage DC	Interrupting Rating	Resistance (mOhms)**Typ	Typical Melt I ² t** (A ² sec)
JFC0402-0200FS	0.20	32V	35A	1750	0.0006
JFC0402-0250FS	0.25			1500	0.0010
JFC0402-0315FS	0.315			1000	0.0014
JFC0402-0375FS	0.375			780	0.0018
JFC0402-0500FS	0.50			500	0.0043
JFC0402-0750FS	0.75			220	0.011
JFC0402-1100FS	1.0			130	0.04
JFC0402-1150FS	1.5			78	0.06
JFC0402-1200FS	2.0			40	0.13
JFC0402-1250FS	2.5			24	0.20
JFC0402-1300FS	3.0			18	0.33
JFC0402-1350FS	3.5			14	0.45
JFC0402-1400FS	4.0			11	0.60

- * DC Interrupting Rating (Measured at rated voltage, time constant of less than 50 microseconds, battery source)
- * DC Cold Resistance are measured at <10% of rated current in ambient temperature of 25°C
- * Typical Melting I²t (Measured with a battery bank at rated DC voltage, Measured at 1ms open time, time constant of calibrated circuit less than 50 microseconds).
- * Packing Qty: 10000


Time Current Curve

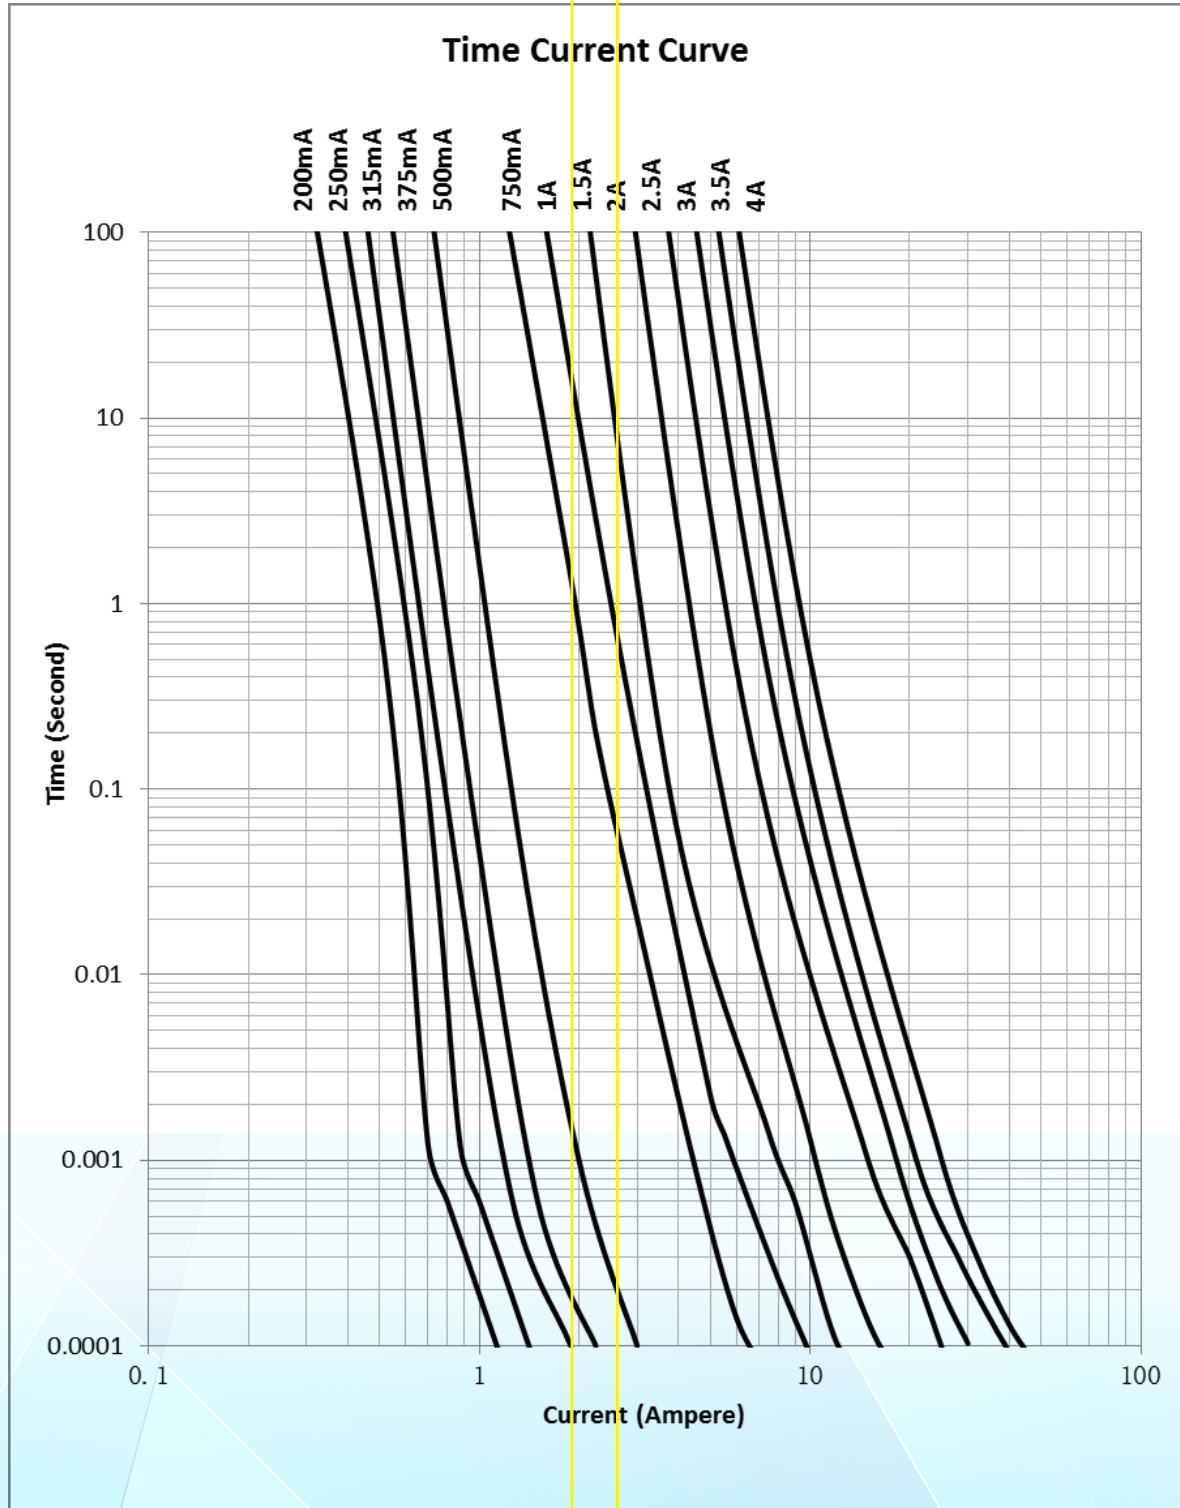

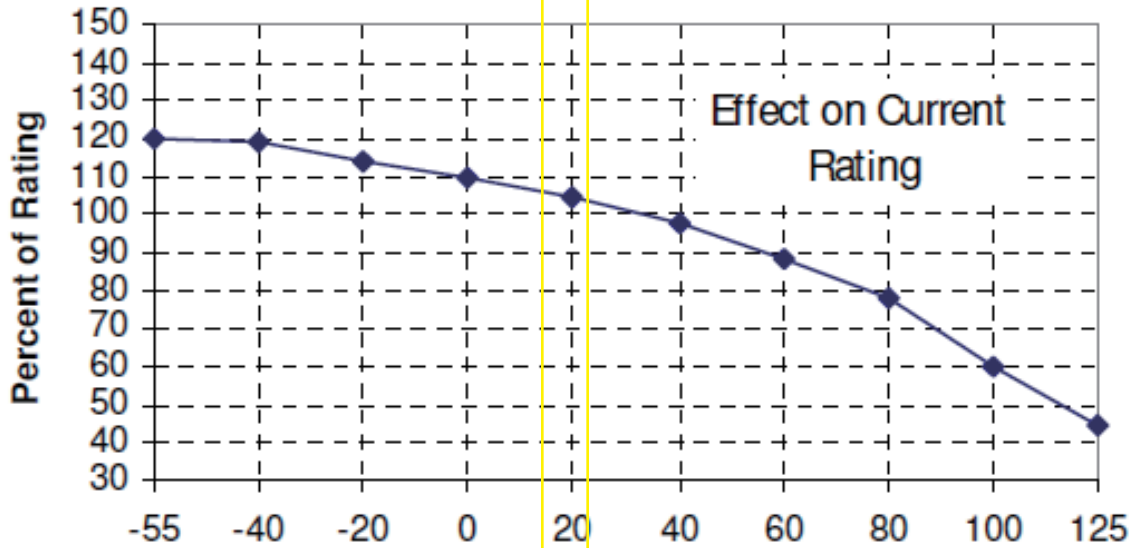Temperature Derating Curve


Normal ambient temperature: 23+/-3 °C

Operating temperature: -55 ~ 125 °C, with proper correction factor applied

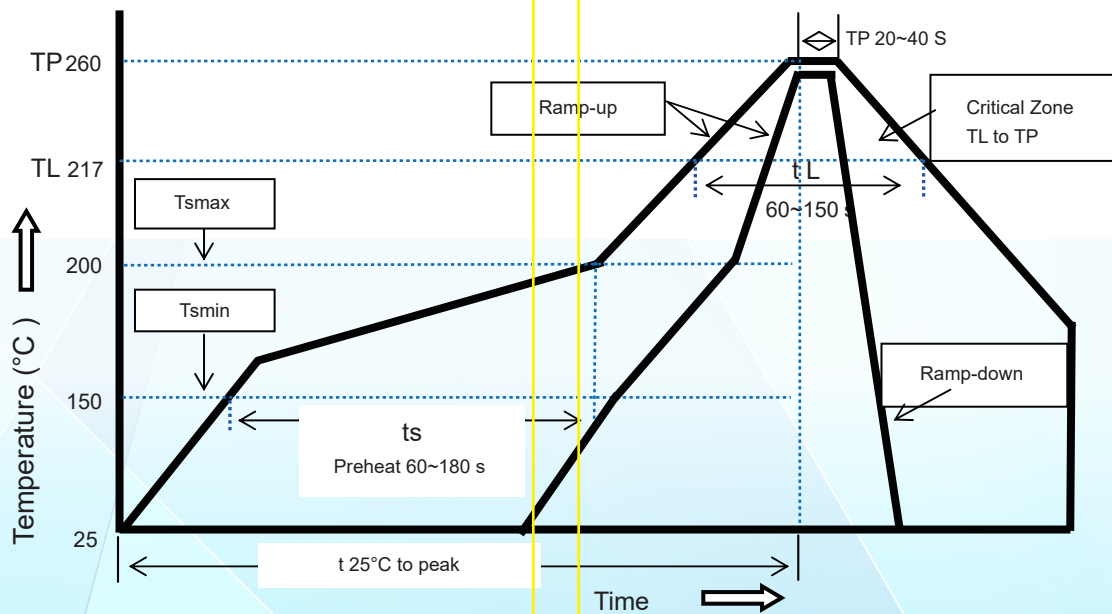Soldering Parameters


	Reflow Condition	Pb-Free assembly
Preheating	Temperature Min Ts(min)	150 °C
	Temperature Max Ts(max)	200 °C
	Time Max	120 secs
Soldering	Temperature (TL)(Liquidus)	260 °C
	Time Max (TL)	60 secs
	Temperature (TP)	Max 260 °C
	Time Max (TP)	10 secs

Part Numbering System

JF C 0402 - xxxx F S

S=SMD

T=Time-Lag, F=Fast Acting

xxxx=四位电流

0402体积

C=Ceramic, T=Thin Film, H=High Temperature Ceramic Series

JF=JDT Fuse

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [JDT](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#)
[0308.375UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [R451003.L](#)
[R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [ABB-A 25A 500V](#) [SGB401](#) [SGB075](#) [0154002.DRL](#) [0154008.DRL](#) [0154.500DRL](#)
[189140.1,25](#) [189140.0,4](#) [189140.0,63](#) [189140.0,25](#) [0402FA-R200](#) [0402SFF150F/24-2](#) [0435.250KRHFS](#) [0468003.WR](#) [0494001.NRHF](#)
[0494002.NRHF](#) [0494003.NRHF](#) [049402.5NRHF](#) [049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#) [0494.500NRHF](#) [CF06V3T1R60](#)
[CF06V3T2R50](#) [06H1300D](#) [JFC0603-1200FS](#) [CP06V3T2R0](#) [06F-0200L1](#) [06F-0500L1](#)