

为您的产品保驾护航

PRODUCT DATASHEET

Nano Fuse · Surface Mount


JFC2410 慢断



**SCOPE**


- Notebook PC
- LCD/PDF TV
- LCD/PDP panel
- LCD monitor
- LCD backlight inverter
- Portable DVE player
- Power supply
- Networking
- PC server
- Cooling fan system
- Storage system
- Telecom system
- Wireless base station
- White goods
- Game console
- Automotive
- Battery charging circuit
- Office Automation
- Industrial equipment
- Medical equipment

**Agency Approvals**

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E486200            |

**PART NUMBERING**

**JF C xxxx - xxxx T S**

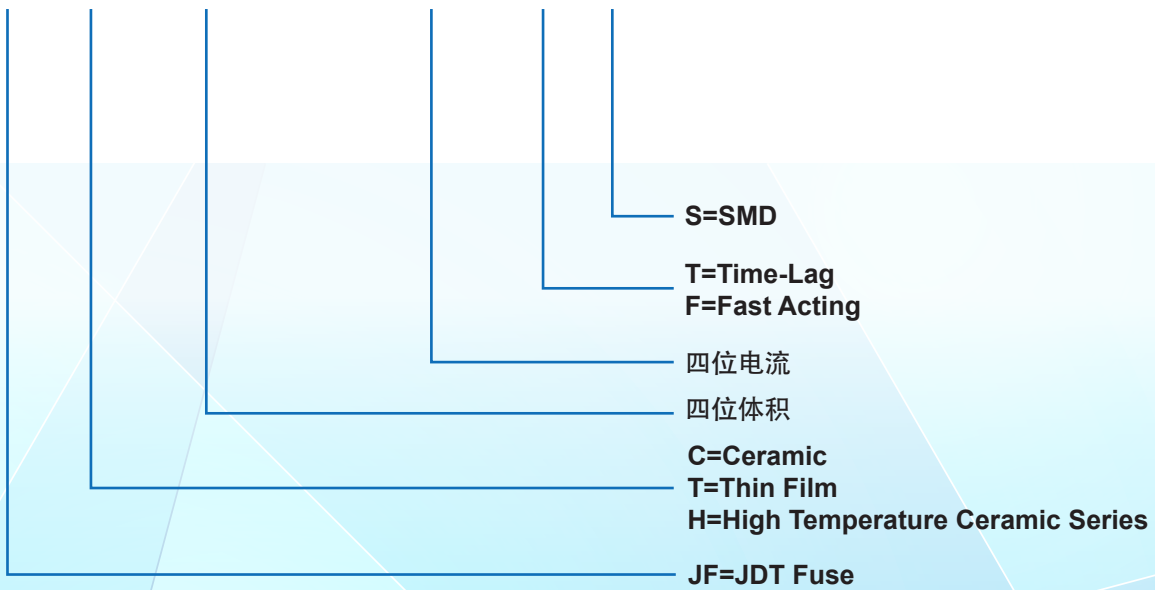

### RATED CURRENT AND RATED VOLTAGE

- Rated Current 50mA—15A
- Rated Voltage 250V AC ( 20A-30A:72V AC )

### MARKING

The fuses shall have the following marking

- Manufacturing factory mark & logo :
  - Rated Current(A):\_mA / \_A
  - Electrical characteristics: T
- Note  
There is no provision on label size and position

### APPEARANCES AND CONFIGURATION


- Appearance : No significant stains, rust or crack, mark should be easy to recognize.
- Shape: Surface Mount Fuse

### Performance Specification

| Part Number    | Rated Current (A) | Max Voltage Rating(V) | Interrupting Rating | Nominal Cold Resistance (ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) |
|----------------|-------------------|-----------------------|---------------------|--------------------------------|---|
| JFC2410-0500TS | 0.50              | 250V                  | 50A@250V            | 0.7000                         | 0.240   |
| JFC2410-0750TS | 0.75              |                       |                     | 0.3600                         | 0.904   |
| JFC2410-1100TS | 1.00              |                       |                     | 0.2250                         | 1.98  |
| JFC2410-1150TS | 1.50              |                       |                     | 0.0930                         | 3.65  |
| JFC2410-1200TS | 2.00              |                       |                     | 0.0625                         | 8.20  |
| JFC2410-1250TS | 2.50              |                       |                     | 0.0450                         | 15.0  |
| JFC2410-1300TS | 3.00              |                       |                     | 0.0340                         | 20.16   |
| JFC2410-1350TS | 3.50              |                       |                     | 0.0224                         | 26.53   |
| JFC2410-1400TS | 4.00              |                       |                     | 0.0186                         | 34.40   |
| JFC2410-1500TS | 5.00              |                       |                     | 0.0136                         | 53.72   |
| JFC2410-1600TS | 6.00              |                       |                     | 0.0123                         | 84.58   |
| JFC2410-1630TS | 6.30              |                       |                     | 0.0115                         | 95.32   |
| JFC2410-1700TS | 7.00              |                       |                     | 0.0105                         | 123.83  |
| JFC2410-1800TS | 8.00              |                       |                     | 0.0088                         | 137.34  |
| JFC2410-2100TS | 10.0              |                       |                     | 0.0073                         | 187.45  |
| JFC2410-2120TS | 12.0              |                       |                     | 0.0061                         | 260.46  |
| JFC2410-2150TS | 15.0              |                       |                     | 0.0038                         | 320.65  |
| JFC2410-2200TS | 20.0              | 72V                   | 500A@72V            | 0.0023                         | 210   |
| JFC2410-2250TS | 25.0              |                       |                     | 0.0017                         | 400   |
| JFC2410-2300TS | 30.0              |                       |                     | 0.0012                         | 900   |

### OUTLINE DRAWING AND STRUCTURE

- Outline Drawing and dimensions (unit : mm)

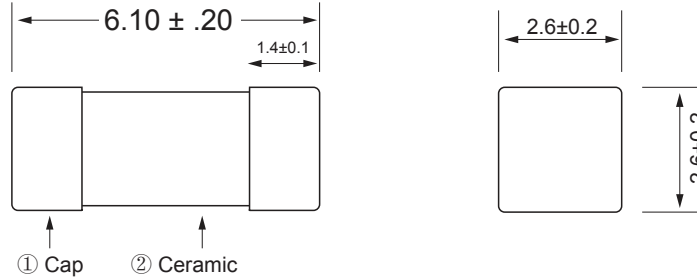

- Structure

| NO. | Component | Material            | Quantity |
|-----|-----------|---------------------|----------|
| ①   | Cap       | Silver Plated Brass | 2        |
| ②   | Body      | Ceramic tube        | 1        |

### PRODUCT CHARACTERISTICS

| No. | Item                         | Contain  | Reference standard                         |
|-----|------------------------------|--|--|
| 1   | Insulation Resistance        | 10,000 ohms minimum                                    | MIL-STD-202G, Method 302 Test Condition A  |
| 2   | Solderability                | T=235°C ± 5°C, t=5+0/-0.5s, Cover ≥ 95%                | MIL-STD-202G, Method 208H                  |
| 3   | Resistance to Soldering Heat | 10 sec at 260°C  | MIL-STD-202G, Method 210F Test Condition B |
| 4   | Thermal Shock                | 5 cycles, -65°C to 125°C, 15 minutes @ each extreme    | MIL-STD-202G, Method 107G Test Condition B |
| 5   | Mechanical Shock             | 100G's peak for 6 milliseconds, 3 cycles               | MIL-STD-202G, Method 213B Test 1           |
| 6   | Vibration                    | 0.03" amplitude, 10-55 Hz in 1 min. 2hrs each XYZ=6hrs | MIL-STD-202G, Method 201A                  |
| 7   | Moisture Resistance          | 10 cycles  | MIL-STD-202G, Method 106G                  |
| 8   | Salt spray                   | 48hrs  | MIL-STD-202G, Method 101E Test Condition B |

### ELECTRICAL CHARACTERISTICS

- Pre-Arcing Time / Current Characteristics:


| Ampere Rating | % of Ampere Rating | Opening Time               |
|---------------|--------------------|----------------------------|
| 50mA – 30A    | 100%               | 4 hours, Minimum           |
|               | 200%               | 1s Minimum 60s Maximum     |
|               | 300%               | 0.2 s Minimum 3s Maximum   |
|               | 800%               | 0.02s Minimum 0.1s Maximum |

- Breaking Capacity  
50mA-15A : 50A@250V AC  
20A-30A:500A@72V AC


**ENVIRONMENTAL CHARACTERISTIC**

- Operating temperature range : -55°C to 125°C
- Company operating temperature of the environment more than 25+/-5°C , in the selection of fuse specifications, it needs to consider the impact of the operating environment of the temperature fuse. Photo: temperature derating curve.

**Temperature Derating Curve**

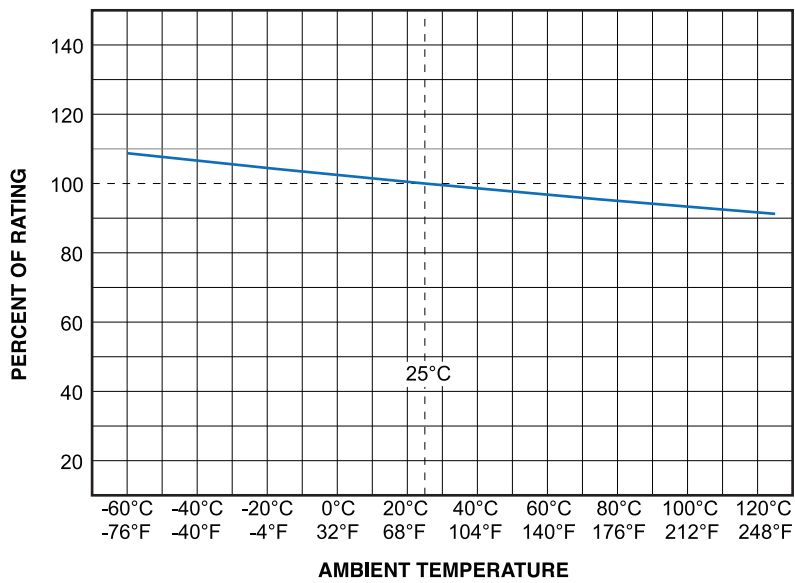


**Average Time-Current Curve**

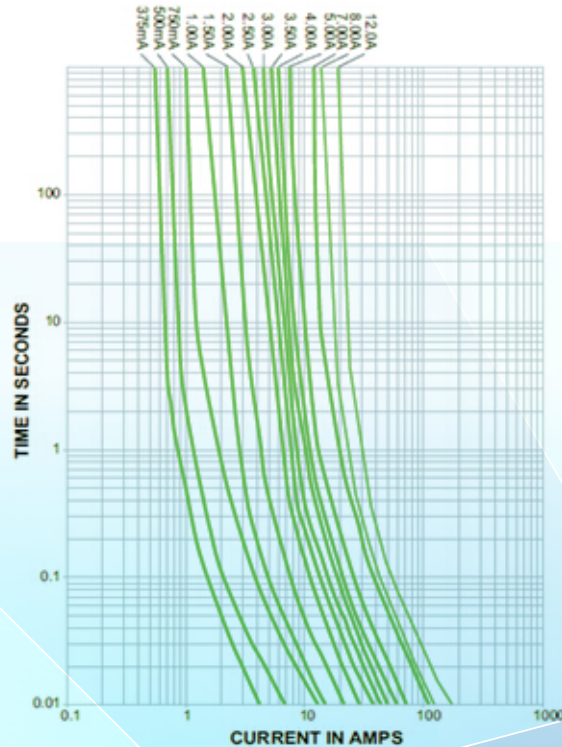


### INSTALLATION WAY AND PARAMETERS

- Propose that the following picture installation way is installed and satisfied the required size.

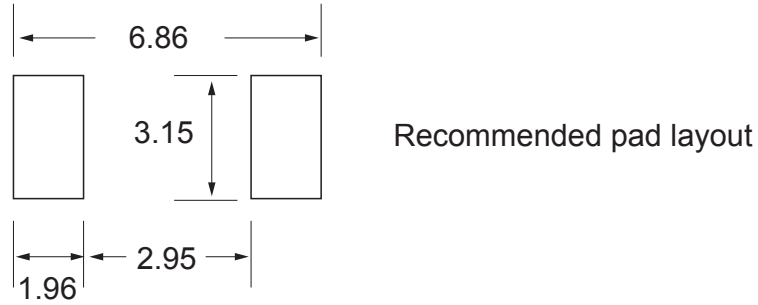

- Recommended Customer Soldering Parameters

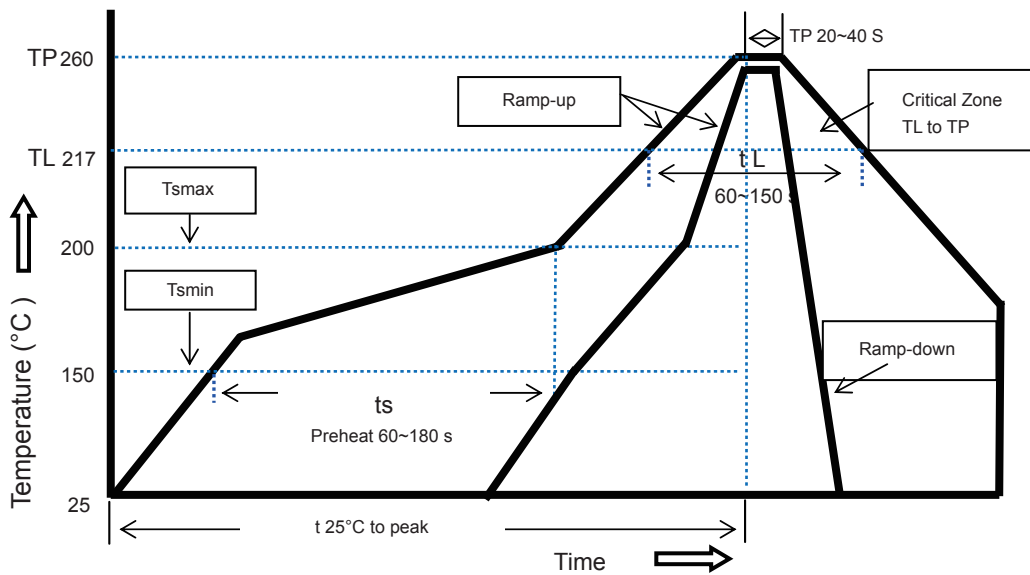

|            | Reflow Condition           | Pb-Free assembly |
|------------|----------------------------|------------------|
| Preheating | Temperature Min Ts(min)    | 150 C            |
|            | Temperature Max Ts(max)    | 200 C            |
|            | Time Max                   | 120 secs         |
| Soldering  | Temperature (TL)(Liquidus) | 260 C            |
|            | Time Max (TL)              | 60 secs          |
|            | Temperature (TP)           | Max 260 C        |
|            | Time Max (TP)              | 10 secs          |

---

### OTHER NOTICE IN USED

- It could be in conformance with another file which made by our company.

---

### PACKING

- Packing Quantity
- 1000 fuses each disc

---

### OTHERS

- If in use beyond the requirements of the specifications, must pass through the mutual confirmation!
- If the specification is not appropriate, must through consultation between the two sides and by the company to modify.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Surface Mount Fuses](#) category:*

*Click to view products by [JDT](#) manufacturer:*

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [SFT-125MA](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308.250UR](#)  
[0308.375UR](#) [0308.750UR](#) [0308001.UR](#) [030801.5UR](#) [F0603G0R03FNTR](#) [SKY87604-12](#) [SKY87604-11](#) [SKY87604-13](#) [R451003.L](#)  
[R451.500L](#) [R451001.L](#) [3-103-119](#) [3-103-123](#) [CF12V6T2R0](#) [ABB-A 25A 500V](#) [PSFB-1.6A](#) [PSFB-2.5A](#) [PSFA-1.6A](#) [PSFB-1A](#) [2410FA-5A](#)  
[SGB401](#) [SGB075](#) [MTS2200A](#) [0154002.DRL](#) [0154008.DRL](#) [0154.500DRL](#) [189140.1,25](#) [189140.0,8](#) [189140.0,4](#) [189140.0,63](#) [189140.0,25](#)  
[0402FA-R200](#) [0402SFF150F/24-2](#) [0435.250KRHFS](#) [0468003.WR](#) [0494001.NRHF](#) [0494002.NRHF](#) [0494003.NRHF](#) [049402.5NRHF](#)  
[049403.5NRHF](#) [0494.250NRHF](#) [0494.375NRHF](#)