

## Glass3225






## **Features**


- ▶ 4 pads SMD glass sealed crystal ;
- Applications in wireless communication ,DSC and USB interface card;
- Excellent heat resistance and environmental characteristics;
- Contains Pb in sealing glass exempted by RoHS directive.

Crysta	ls speci	fications
--------	----------	-----------


ITEMS(项目)	PARAMETER(规格说明)				
Frequency Range	10~12MHz	12~20MHz	20~28MHz	28~54MHz	
Equivalent Series Resistance	120ΩMax.	80ΩMax.	60ΩMax.	50ΩMax.	
Drive Level	1 ~ 50 μW (10 μW typical)				
Frequency Tolerance (at 25 °C)	± 30 ppm, or specify				
Frequency Stability Over Operating Temperature Range	± 30 ppm, or specify				
Operating Temperature Range	-10 ~ +70℃, or specify				
Shunt Capacitance (C0)	3 pF Max.				
Load Capacitance	8 pF, 10 pF, or specify				
Aging (at 25 °C)	± 3 ppm / year Max.				
Storage Temperature Range	- 40 ~ + 85 °C				
Packing Unit(包装单位)	3,000pcs/Reel				

## **Dimensions**

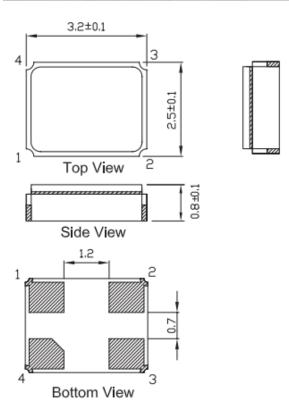



Top View Suggested Connection



Top View Suggested Layout

Units: mm

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Resonators category:

Click to view products by JGHC manufacturer:

Other Similar products are found below:

B39431R820H210 CSAC2.00MGCM-TC ECS-HFR-40.00-B-TR CSTLS4M00G53Z-A0 ZTB455E ECS-CR2-16.00-A-TR ECS-HFR-20.00-B-TR ECS-CR2-20.00-A-TR RO3164E-3 ASR418S2-T CSTNE10M0G520000R0 CSTLS8M00G53093-A0 CSTNE12M0G52A000R0 CSTLS18M4X54-A0 CSTLS16M9X53Z-B0 CSTLS24M0X51-A0 CSTLS25M0X51-B0 CSTLS18M0X51-B0 CSTLS4M00G53093-A0 CSTLS18M4X53-A0 CSTNE16M0V510000R0 CSTLS30M0X53-B0 CSTLS33M8X53-B0 CSTLS16M9X53-A0 CSTLS6M40G56-B0 CSTLS6M25G56-A0 CSTNE14M7V510000R0 CSTLS18M4X53-B0 CSTLS33M0X51-B0 CSTLS5M50G56-B0 7B008000101 7D038400101 TAXM24M2ILDBET2T TAXM26M2IHDBET2T 146-32.768-12.5-20-20/A 3225-24.00-12-10-10/A 7B009843M01 CF4016M00009T8188042 S32400001B0730D1JB X252016MLB4SI Q24FA20H00389 CSTLS16M0X54-B0 CSTLS4M19G56-B0 9AC04194152080D2JB CST3.58MGW CSTCR4M91G55B-R0 CSTLS3M68G56-B0 S2100327072090 FC-12M32.768KHZ9PF20PPM 7Y032768NW2