






### Features

- Extremely small SMD seam sealed clock oscillator unit;
- Tri-State function available;
- Low current consumption;
- Small supply voltage shift;
- Main application :Application for smart phone, sip module, variety of compact portable consumer products;
- RoHS Compliant / Pb Free.


### Crystals specifications

| ITEMS (项目)                              |                      | PARAMETER (规格说明) 022           |
|---|----------------------|--------------------------------|
| Output Type(输出模式)                       |                      | CMOS                           |
| Output Load(输出负载条件)                     |                      | 15 pF , or specify             |
| Oscillation Mode(振荡模式)                  |                      | Fundamental                    |
| Supply Voltage(电源电压)                    |                      | 1.8±10%V ; 2.5±10%V ; 3.3±10%V |
| Frequency Range(输出频率范围)                 |                      | 4 ~ 54MHz                      |
| Frequency Stability                     |                      | ± 25 ppm , ± 50 ppm            |
| Operating Temperature Range(工作温度)       |                      | - 10 ~ + 70 ℃ , - 40 ~ + 85 ℃  |
| Storage Temperature Range(储存温度)         |                      | - 55 ~ + 125 ℃                 |
| Oscillating voltage(振荡电压)               | Voltage Vol ( Max. ) | 10 % VCC Max.                  |
|   | Voltage Voh ( Min. ) | 90 % VCC Min                   |
| Rise ( Tr ) / Fall ( Tf ) Time: 上升/下降时间 |                      | 5 ns Max.                      |
| Current Consumption ( 功耗 )              |                      | 5 mA Max.                      |
| Symmetry(占空比)                           |                      | 40 ~ 60 %                      |
| Start-up Time(振荡启动时间)                   |                      | 5 ms Max.                      |
| Phase Jitter ( 12 KHz ~ 20 MHz )        |                      | 1 ps Max.                      |
| Aging ( at 25 ℃ )频率老化                   |                      | ± 3 ppm / year Max.            |
| Packing Unit(包装单位)                      |                      | 3, 000pcs/Reel                 |

### Dimensions

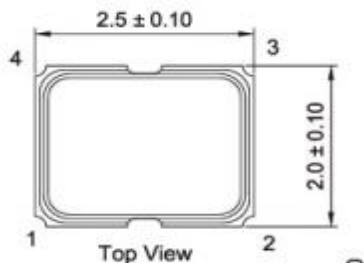

**PAD FUNCTION:**  
 1: ENABLE CONTROL  
 2: GND  
 3: OUT  
 4: VDD



Units: mm

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard Clock Oscillators](#) category:*

*Click to view products by [JGHC](#) manufacturer:*

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#)