





CD 263 BK Series

2000h at 105°C

Standard 105°C

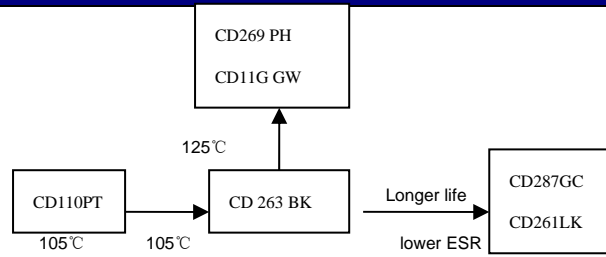


Items	Characteristics	
Operating Temperature Range(°C)	-40~+105	-25~+105
Voltage Range(V)	6.3~250	315~500
Capacitance Range(µF)	0.1~15000	
Capacitance Tolerance(20°C,120Hz)	±20%	
Leakage Current(µA)	6.3~100V	160~500V
	After 2 minutes at 20°C application of rated voltage,leakage current is not more than 0.01CV or 3,whichever is greater.	After 1 minute at 20°C application of rated voltage,leakage current is not more than : CV≤1000:0.1 CV +40 CV>1000:0.04 CV +100
C: Nominal Capacitance (µF) V: Rated Voltage(V)		
Dissipation Factor (20°C, 120Hz)	Rated Voltage(V)	6.3 10 16 25 35 50 63 100 160 200 250 315 350 400 420 450 500
	Tan δ (max)	0.22 0.19 0.16 0.14 0.12 0.10 0.09 0.08 0.15 0.20
When nominal capacitance is over 1000µF tan δ shall be added 0.02 to the listed value with increase of every 1000µF		
Stability at low temperature(Impedance Ratio at 120Hz)	Rated Voltage(V)	6.3 10 16 25 35 50 63 100 160 200 250 315 350 400 420 450 500
	Z _{-25°C} /Z _{+20°C}	4 3 2 3 6
	Z _{-40°C} /Z _{+20°C}	8 6 4 3 8 -

	Useful Life	Load Life	Endurance Test	Shelf Life
Lifetime	$\phi \leq 8$:2000h $\phi \geq 10$:3000h	>100000h	$\phi \leq 8$:1000h $\phi \geq 10$:2000h	2000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value
Capacitance Change	Within ±30% of initial value		Within ±20% of initial value	Within ±20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 150% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U _R I _R 105°C	U _R 1.4×I _R 40°C	U _R I _R 105°C	U _R I _R =0 105°C
				After test: U _R to be applied for 30min>24h before measurement

Dimensions

mm

Frequency Coefficient

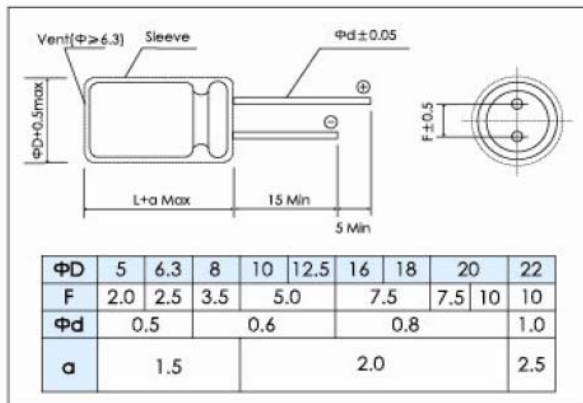

Rated Voltage(V)	Frequency Cap(µF)	50/60Hz	120Hz	1kHz	10kHz	50kHz	100kHz
		6.3~100	0.1~4.7	0.32	0.4	0.7	0.8
	10~47	0.40	0.5	0.8	0.9	0.96	1.0
	100~220	0.56	0.7	0.9	0.9	0.96	1.0
	330~1000	0.64	0.8	0.9	1.0	1.0	1.0
	2200~15000	0.72	0.9	1.0	1.0	1.0	1.0
160~500	0.47~10	0.80	1.0	1.75	2.0	2.4	2.5
	22~56	0.80	1.0	1.6	1.8	1.9	2.0
	68~220	0.80	1.0	1.3	1.4	1.6	1.65

Temperature Coefficient

Temperature (°C)	+70	+85	+105
Rated Voltage (V)			
6.3~100	2.0	1.7	1.0
160~500	1.8	1.4	1.0


Ratings for CD263 BK Series

U _s (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Max Imp 20°C, 100KHz	Rated Ripple Current 105°C, 100KHz	Size Φ D x L	P/N
(v)	(μF)	(Ω)	(Ω)	(mA Arms)	(mm)	-
6.3 (7.2) 0J	33	8.8	2.5	105	5*11.5	ECR0JBK330M00050011
	47	6.2	1.5	120	5*11.5	ECR0JBK470M00050011
	100	2.9	1.2	130	5*11.5	ECR0JBK101M00050011
	220	1.3	0.87	180	6.3*11.5	ECR0JBK221M00063011
	330	0.9	0.58	220	6.3*11.5	ECR0JBK331M00063011
	470	0.6	0.39	315	8*11.5	ECR0JBK471M00080011
	1000	0.29	0.23	500	10*12.5	ECR0JBK102M00100012
	2200	0.14	0.095	765	10*20	ECR0JBK222M00100020
	3300	0.105	0.09	1050	12.5*20	ECR0JBK332M00125020
	4700	0.079	0.061	1670	16*25	ECR0JBK472M00160025
	6800	0.062	0.056	1740	16*25	ECR0JBK682M00160025
	10000	0.053	0.045	2110	16*31.5	ECR0JBK103M00160031
	15000	0.044	0.036	25800	18*35.5	ECR0JBK153M00180035
10 (13) 1A	22	11.5	2.5	92	5*11.5	ECR1ABK220M00050011
	33	7.6	1.9	105	5*11.5	ECR1ABK330M00050011
	47	5.4	1.5	120	5*11.5	ECR1ABK470M00050011
	100	2.5	1.2	130	5*11.5	ECR1ABK101M00050011
	220	1.1	0.58	220	6.3*11.5	ECR1ABK221M00063011
	330	0.76	0.47	265	8*11.5	ECR1ABK331M00080011
	470	0.54	0.39	315	8*11.5	ECR1ABK471M00080011
	1000	0.25	0.18	615	10*16	ECR1ABK102M00100016
	2200	0.13	0.09	1050	12.5*20	ECR1ABK222M00125020
	3300	0.09	0.068	1300	12.5*25	ECR1ABK332M00125025
	4700	0.07	0.056	1740	16*25	ECR1ABK472M00160025
	6800	0.06	0.045	2110	16*31.5	ECR1ABK682M00160031
10000	0.05	0.036	2580	18*35.5	ECR1ABK103M00180035	
16 (20) 1C	10	21.2	2.5	92	5*11.5	ECR1CBK100M00050011
	22	9.7	1.9	105	5*11.5	ECR1CBK220M00050011
	33	6.4	1.5	120	5*11.5	ECR1CBK330M00050011
	47	4.5	1.2	130	5*11.5	ECR1CBK470M00050011
	100	2.1	0.58	220	6.3*11.5	ECR1CBK101M00063011
	220	0.97	0.47	290	8*11.5	ECR1CBK221M00080011
	330	0.64	0.39	315	8*11.5	ECR1CBK331M00080011
	470	0.45	0.23	500	10*12.5	ECR1CBK471M00100012
	1000	0.21	0.12	825	10*20	ECR1CBK102M00100020
	2200	0.11	0.068	1300	12.5*25	ECR1CBK222M00125025
25 (32) 1E	4.7	39.5	3	85	5*11.5	ECR1EBK47M00050011
	10	18.6	2.5	92	5*11.5	ECR1EBK100M00050011
	22	8.4	1.9	105	5*11.5	ECR1EBK220M00050011
	33	5.6	1.5	120	5*11.5	ECR1EBK330M00050011
	47	4.0	1.2	130	5*11.5	ECR1EBK470M00050011
	100	1.9	0.58	220	6.3*11.5	ECR1EBK101M00063011
	220	0.84	0.39	315	8*11.5	ECR1EBK221M00080011
	330	0.56	0.23	500	10*12.5	ECR1EBK331M00100025
25 (32) 1E	470	0.40	0.18	615	10*16	ECR1EBK471M00100016
	1000	0.19	0.09	1050	12.5*20	ECR1EBK102M00125020
	2200	0.10	0.056	1740	16*25	ECR1EBK222M00160025
	3300	0.07	0.045	2110	16*31.5	ECR1EBK332M00160031
	4700	0.06	0.036	2580	18*35.5	ECR1EBK472M00180035


U _s (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Max Imp 20°C, 100KHz	Rated Ripple Current 105°C, 100KHz	Size Φ D x L	P/N	
(v)	(μF)	(Ω)	(Ω)	(mA Arms)	(mm)	-	
35 (44) 1V	4.7	33.9	2.5	92	5*11.5	ECR1VBK47M00050011	
	10	15.9	1.8	105	5*11.5	ECR1VBK100M00050011	
	22	7.2	1.5	120	5*11.5	ECR1VBK220M00050011	
	33	4.8	1.5	130	5*11.5	ECR1VBK330M00050011	
	47	3.4	0.58	220	6.3*11.5	ECR1VBK470M00063011	
	100	1.6	0.39	315	8*11.5	ECR1VBK101M00080011	
	220	0.72	0.23	500	10*12.5	ECR1VBK221M00100012	
	330	0.48	0.18	615	10*16	ECR1VBK331M00100016	
	470	0.34	0.12	825	10*20	ECR1VBK471M00100020	
	1000	0.16	0.068	1300	12.5*25	ECR1VBK102M00125025	
	2200	0.08	0.045	2110	16*31.5	ECR1VBK222M00160031	
	3300	0.06	0.036	2580	18*35.5	ECR1VBK332M00180035	
	50 (63) 1H	0.1	1327	18	10	5*11.5	ECR1HBK0R1M00050011
		0.22	603	13	15	5*11.5	ECR1HBKR22M00050011
0.33		402	10	18	5*11.5	ECR1HBKR33M00050011	
0.47		282	7	23	5*11.5	ECR1HBKR47M00050011	
1		133	4.9	35	5*11.5	ECR1HBK010M00050011	
2.2		60	4.2	53	5*11.5	ECR1HBK2R2M00050011	
3.3		40	3.9	65	5*11.5	ECR1HBK3R3M00050011	
4.7		28	3.6	82	5*11.5	ECR1HBK4R7M00050011	
10		13	2.7	100	5*11.5	ECR1HBK100M00050011	
22		6	1.9	125	5*11.5	ECR1HBK220M00050011	
33		4	1.1	195	6.3*11.5	ECR1HBK330M00063011	
47		2.8	0.9	245	6.3*11.5	ECR1HBK470M00063011	
100		1.3	0.5	385	8*11.5	ECR1HBK101M00080011	
220		0.60	0.27	505	10*16	ECR1HBK221M00100016	
330		0.40	0.18	675	10*20	ECR1HBK331M00100020	
470		0.28	0.12	895	12.5*20	ECR1HBK471M00125020	
1000		0.13	0.076	1495	16*25	ECR1HBK102M00160025	
2200		0.07	0.05	2190	18*35.5	ECR1HBK222M00180035	
63 (79) 1J	4.7	25	5.8	74	5*11.5	ECR1JBK47M00050011	
	10	12	3.6	95	5*11.5	ECR1JBK100M00050011	
	22	5	2.1	130	6.3*11.5	ECR1JBK220M00063011	
	33	4	1.7	160	6.3*11.5	ECR1JBK330M00063011	
	47	2.5	1.2	305	8*11.5	ECR1JBK470M00080011	
	100	1.2	0.65	395	10*12.5	ECR1JBK101M00100012	
	220	0.54	0.32	505	10*20	ECR1JBK221M00100020	
	330	0.36	0.22	660	12.5*20	ECR1JBK331M00125020	
	470	0.25	0.16	850	12.5*25	ECR1JBK471M00125025	
	1000	0.12	0.098	1430	16*31.5	ECR1JBK102M00160031	
	100 (125) 2A	0.47	226	13	30	5*11.5	ECR2ABK47M00050011
		1	106	11	45	5*11.5	ECR2ABK010M00050011
2.2		48	9.2	60	5*11.5	ECR2ABK2R2M00050011	
3.3		32	7.2	67	5*11.5	ECR2ABK3R3M00050011	
4.7		23	6.3	75	5*11.5	ECR2ABK4R7M00050011	
10		11	3.3	110	6.3*11.5	ECR2ABK100M00063011	
22		5	1.4	165	8*11.5	ECR2ABK220M00080011	
33		3.2	0.94	305	10*12.5	ECR2ABK330M00100012	
47		2.3	0.68	320	10*16	ECR2ABK470M00100016	
100		1.1	0.28	585	12.5*20	ECR2ABK101M00125020	
220		0.48	0.16	1120	16*25	ECR2ABK221M00160025	
330		0.32	0.13	1290	16*25	ECR2ABK331M00160025	
470		0.23	0.11	1350	16*31.5	ECR2ABK471M00160031	



Lifetime Diagram



Lifetime Diagram 160-500V



Ratings for CD263 BK Series

U _s (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Rated Ripple Current 105°C, 120Hz	Size ΦD x L	P/N
(v)	(μF)	(Ω)	(mArms)	(mm)	-
160 (200) 2C	0.47	423.5	12	6.3*11.5	ECR2CBK47M□□063011
	1	199.0	18	6.3*11.5	ECR2CBK010M□□063011
	2.2	90.5	26	6.3*11.5	ECR2CBK2R2M□□063011
	3.3	60.3	37	8*11.5	ECR2CBK3R3M□□080011
	4.7	42.3	44	8*11.5	ECR2CBK4R7M□□080011
	10	19.9	75	10*12.5	ECR2CBK100M□□100012
	22	9.0	135	10*16	ECR2CBK220M□□100016
	33	6.0	175	10*20	ECR2CBK330M□□100020
	47	4.2	230	12.5*20	ECR2CBK470M□□125020
	100	2.0	330	16*25.5	ECR2CBK101M□□160025
200 (250) 2D	0.47	423.5	12	6.3*11.5	ECR2DBK47M□□063011
	1	199.0	18	6.3*11.5	ECR2DBK010M□□063011
	2.2	90.5	26	6.3*11.5	ECR2DBK2R2M□□063011
	3.3	60.3	37	8*11.5	ECR2DBK3R3M□□080011
	4.7	42.3	50	10*12.5	ECR2DBK4R7M□□100012
	10	19.9	80	10*16	ECR2DBK100M□□100016
	22	9.0	135	10*20	ECR2DBK220M□□100020
	33	6.0	190	12.5*20	ECR2DBK330M□□125020
	100	2.0	360	16*25.5	ECR2DBK101M□□160025
	220	0.9	525	18*31.5	ECR2DBK221M□□180031
250 (300) 2E	0.47	423.5	12	6.3*11.5	ECR2EBK47M□□063011
	1	199.0	18	6.3*11.5	ECR2EBK010M□□063011
	2.2	90.5	30	8*11.5	ECR2EBK2R2M□□080011
	3.3	60.3	43	8*11.5	ECR2EBK3R3M□□080011
	4.7	42.3	50	10*12.5	ECR2EBK4R7M□□100012
	10	19.9	90	10*16	ECR2EBK100M□□100016
	22	9.0	155	12.5*20	ECR2EBK220M□□125020
	33	6.0	190	12.5*25	ECR2EBK330M□□125025
	47	4.2	225	16*25.5	ECR2EBK470M□□160025
	100	2.0	340	16*31.5	ECR2EBK101M□□160031
315 (350) 2F	0.47	564.6	11	6.3*11.5	ECR2FBK47M□□063011
	1	265.4	18	8*11.5	ECR2FBK010M□□080011
	2.2	120.6	30	10*12.5	ECR2FBK2R2M□□100012
	3.3	80.4	36	10*12.5	ECR2FBK3R3M□□100012
	4.7	56.5	47	10*16	ECR2FBK4R7M□□100016
	10	26.5	95	10*20	ECR2FBK100M□□100020
	22	12.1	130	12.5*20	ECR2FBK220M□□125020
	33	8.0	180	12.5*25	ECR2FBK330M□□125025
	47	5.6	330	16*25.5	ECR2FBK470M□□160025
	100	2.7	620	18*31.5	ECR2FBK101M□□180031
350 (400) 2V	0.47	564.6	11	6.3*11.5	ECR2VBK47M□□063011
	1	265.4	18	8*11.5	ECR2VBK010M□□080011
	2.2	120.6	30	10*12.5	ECR2VBK2R2M□□100012
	3.3	80.4	36	10*12.5	ECR2VBK3R3M□□100012
	4.7	56.5	47	10*16	ECR2VBK4R7M□□100016
	10	26.5	95	10*20	ECR2VBK100M□□100020
	22	12.1	130	12.5*20	ECR2VBK220M□□125020
	33	8.0	180	12.5*25	ECR2VBK330M□□125025
	47	5.6	330	16*25.5	ECR2VBK470M□□160025
	100	2.7	620	18*31.5	ECR2VBK101M□□180031
400 (450) 2G	1	265.4	18	8*11.5	ECR2GBK010M□□080011
	2.2	120.6	25	8*11.5	ECR2GBK2R2M□□080011
	3.3	80.4	30	10*12.5	ECR2GBK2R2M□□100012
	3.3	80.4	35	10*12.5	ECR2GBK3R3M□□100012

U _s (Surge Voltage) Code	Rated Capacitance	Max ESR 20°C, 120Hz	Rated Ripple Current 105°C, 120Hz	Size ΦD x L	P/N	
(v)	(μF)	(Ω)	(mArms)	(mm)	-	
420 (470) 2X	1	265.4	16	8*11.5	ECR2XBK010M□□080011	
		265.4	19	10*12.5	ECR2XBK010M□□100012	
	2.2	120.6	24	8*11.5	ECR2XBK2R2M□□080011	
		120.6	29	10*12.5	ECR2XBK2R2M□□100012	
	3.3	80.4	34	10*12.5	ECR2XBK3R3M□□100012	
		80.4	38	10*16	ECR2XBK3R3M□□100016	
	4.7	56.5	46	10*16	ECR2XBK4R7M□□100016	
		56.5	52	10*20	ECR2XBK4R7M□□100020	
	10	26.5	110	10*20	ECR2XBK100M□□100020	
		26.5	116	12.5*20	ECR2XBK100M□□125020	
	22	12.1	162	12.5*25	ECR2XBK220M□□125025	
		8.0	204	16*20	ECR2XBK330M□□160020	
	33	8.0	228	16*25.5	ECR2XBK330M□□160025	
		5.6	380	16*31.5	ECR2XBK470M□□160031	
	56	4.7	420	16*31.5	ECR2XBK560M□□160031	
		4.7	420	18*25.5	ECR2XBK560M□□180025	
	68	3.9	542	18*31.5	ECR2XBK680M□□180031	
		3.9	542	16*36	ECR2XBK680M□□160036	
	82	3.2	608	18*31.5	ECR2XBK820M□□180031	
		3.2	608	16*40	ECR2XBK820M□□160040	
	100	2.7	713	18*36	ECR2XBK101M□□180036	
		2.7	7136	16*45	ECR2XBK101M□□160045	
	120	2.2	779	18*40	ECR2XBK121M□□180040	
		2.2	779	16*50	ECR2XBK121M□□160050	
	150	1.8	874	20*41	ECR2XBK151M□□200041	
		1.8	874	16*60	ECR2XBK151M□□160060	
450 (500) 2W	1	265.4	16	8*11.5	ECR2WBK010M□□080011	
		265.4	19	10*12.5	ECR2WBK010M□□100012	
	2.2	120.6	26	10*12.5	ECR2WBK2R2M□□100012	
		120.6	29	10*16	ECR2WBK2R2M□□100016	
	3.3	80.4	38	10*16	ECR2WBK3R3M□□100016	
		80.4	42	10*20	ECR2WBK3R3M□□100020	
	4.7	56.5	49	10*16	ECR2WBK4R7M□□100016	
		56.5	54	10*20	ECR2WBK4R7M□□100020	
	10	26.5	122	10*20	ECR2WBK100M□□100020	
		26.5	122	12.5*20	ECR2WBK100M□□125020	
	22	12.1	170	12.5*25	ECR2WBK220M□□125025	
		8.0	240	16*25.5	ECR2WBK330M□□160025	
	47	5.6	400	16*31.5	ECR2WBK470M□□160031	
		4.7	440	18*25.5	ECR2WBK560M□□180025	
	56	4.7	440	16*31.5	ECR2WBK560M□□160031	
		3.9	570	18*31.5	ECR2WBK680M□□180031	
	68	3.9	570	16*36	ECR2WBK680M□□160036	
		3.2	640	18*31.5	ECR2WBK820M□□180031	
	82	3.2	640	18*36	ECR2WBK820M□□180036	
		3.2	640	16*40	ECR2WBK820M□□160040	
	100	2.7	750	18*36	ECR2WBK101M□□180036	
		2.7	750	16*45	ECR2WBK101M□□160045	
	120	2.2	820	18*40	ECR2WBK121M□□180040	
		2.2	820	16*50	ECR2WBK121M□□160050	
	150	1.8	920	18*46	ECR2WBK151M□□180046	
		1.8	920	20*41	ECR2WBK151M□□200041	
	180	1.5	1100	22*41	ECR2WBK181M□□220041	
		1.5	1100	16*60	ECR2WBK151M□□160060	
	500 (550) 2H	1	265.4	21	10*12.5	ECR2HBK010M□□100012
			120.6	35	10*16	ECR2HBK2R2M□□100016
80.4			48	10*20	ECR2HBK3R3M□□100020	

CD 263 BK Series




4.7	80.4	40	10*16	ECR2GBK3R3M□□100016
	56.5	47	10*12.5	ECR2GBK4R7M□□100012
10	56.5	52	10*16	ECR2GBK4R7M□□100016
	26.5	80	10*16	ECR2GBK100M□□100016
	26.5	95	10*20	ECR2GBK100M□□100020
22	26.5	120	12.5*20	ECR2GBK100M□□125020
	12.1	150	12.5*25	ECR2GBK220M□□125025
33	8.0	180	12.5*25	ECR2GBK330M□□125025
	8.0	180	16*20	ECR2GBK330M□□160020
	8.0	215	16*25.5	ECR2GBK330M□□160025
47	5.6	360	16*25.5	ECR2GBK470M□□160025
68	3.9	470	18*25.5	ECR2GBK680M□□180025
82	3.2	575	18*31.5	ECR2GBK820M□□180031
100	2.7	675	18*36	ECR2GBK101M□□180036
120	2.2	735	18*40	ECR2GBK121M□□180040
150	1.8	825	20*41	ECR2GBK151M□□20004

4.7	56.5	63	12.5*20	ECR2HBK4R7M□□125020
10	26.5	120	12.5*25	ECR2HBK100M□□125025
22	12.1	180	16*25.5	ECR2HBK220M□□160025
33	8.0	240	16*31.5	ECR2HBK330M□□160031
47	5.6	405	18*31.5	ECR2HBK470M□□180031
56	4.7	450	16*40	ECR2HBK560M□□160040
	4.7	450	18*31.5	ECR2HBK560M□□180031
68	3.9	560	18*36	ECR2HBK680M□□180036
	3.9	560	18*40	ECR2HBK680M□□180040
	3.9	560	16*45	ECR2HBK680M□□160045
82	3.2	640	18*40	ECR2HBK820M□□180040
	3.2	640	16*55	ECR2HBK820M□□160055
100	2.7	800	20*41	ECR2HBK101M□□200041
	2.7	800	18*46	ECR2HBK101M□□180046
	2.7	800	16*60	ECR2HBK101M□□160060
120	2.2	840	22*45	ECR2HBK121M□□220045
150	1.8	890	22*45	ECR2HBK151M□□220045


Customer products are available on request

Lifetime Diagram

Lifetime Diagram 6.3 ~ 100V

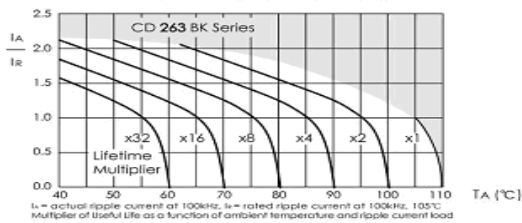

Lifetime Diagram 160 ~ 500V

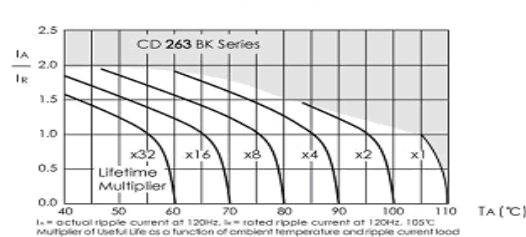

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Jianghai](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#)
[SZ010M1500A5S-1015](#) [227RZS050M](#) [476CKH100MSA](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#)
[VTL100S10](#) [VTL470S10](#) [VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-](#)
[S560M16V6.3X7TBSTF](#) [RGA221M1CTA-0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [MAL214658821E3](#)
[NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#) [NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#)