



CD 261X QX SERIES



5000 - 10000h at 105°C

- Extra high Ripple Current
- Downsized
- Electronic Ballast, LED Lighting




Items	Characteristics																								
Operating Temperature Range (°C)	-40 ~ +105																								
Voltage Range (V)	160 ~ 500																								
Capacitance Range (µF)	1.0 ~ 220																								
Capacitance Tolerance (20°C, 120Hz)	± 20%																								
Leakage Current (µA)	After 1 minute at 20°C application of rated voltage, leakage current is not more than 0.04CV + 100. C: Nominal Capacitance (µF) V: Rated Voltage (V)																								
Dissipation Factor (20°C, 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> </thead> <tbody> <tr> <td>Tan δ (max)</td> <td colspan="3">0.15</td> <td colspan="4">0.20</td> </tr> </tbody> </table>	Rated Voltage (V)	160	200	250	350	400	450	500	Tan δ (max)	0.15			0.20											
	Rated Voltage (V)	160	200	250	350	400	450	500																	
Tan δ (max)	0.15			0.20																					
Stability at Low Temperature (Impedance Ratio at 120Hz)	<table border="1"> <thead> <tr> <th>Rated Voltage (V)</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> <th>500</th> </tr> </thead> <tbody> <tr> <td>Z_{-25°C} / Z_{+20°C}</td> <td colspan="3">3</td> <td colspan="4">6</td> </tr> <tr> <td>Z_{-40°C} / Z_{+20°C}</td> <td colspan="3">6</td> <td colspan="2">8</td> <td colspan="2">10</td> </tr> </tbody> </table>	Rated Voltage (V)	160	200	250	350	400	450	500	Z _{-25°C} / Z _{+20°C}	3			6				Z _{-40°C} / Z _{+20°C}	6			8		10	
	Rated Voltage (V)	160	200	250	350	400	450	500																	
	Z _{-25°C} / Z _{+20°C}	3			6																				
Z _{-40°C} / Z _{+20°C}	6			8		10																			

	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	Φ6.3×11.5 : 7000h Φ8~10 : 10000h Φ ≥ 12.5 : 12000h	≥ 100000h	Φ6.3×11.5 : 5000h Φ8~10 : 8000h Φ ≥ 12.5 : 10000h	Φ6.3×11.5 : 7000h Φ8~10 : 10000h Φ ≥ 12.5 : 12000h	1000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacitance Change	Within ± 50% of initial value		Within ± 30% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 500% of specified value		Not more than 300% of specified value	Not more than 200% of specified value	Not more than 200% of specified value
Condition: Applied Voltage Applied Current Applied Temperature	U _R I _R 105°C	U _R 1.6 × I _R 50°C	U _R I _R 105°C	U _R I _R = 0 105°C	U _s = 0 I _s = 0 105°C After test: U _s to be applied for 30min >24h before measurement

Dimensions

mm

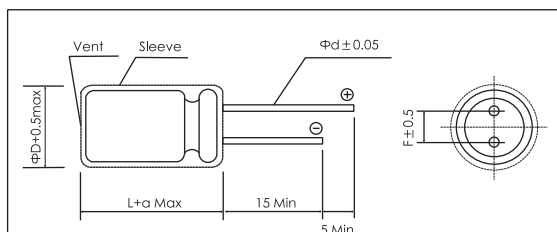

ΦD	6.3	8	10	12.5	16	18	20
F	2.5	3.5	5.0		7.5		10
Φd	0.5		0.6		0.8		
a	1.5		2.0				

Frequency Coefficient

Frequency Cap (µF)	120Hz	1kHz	10kHz	50kHz	100kHz
	1 ~ 5.6	0.2	0.4	0.8	0.92
6.8 ~ 15	0.3	0.6	0.9	0.96	1.0
22 ~ 82	0.4	0.7	0.9	0.96	1.0
100 ~ 220	0.45	0.75	0.9	0.96	1.0

Temperature Coefficient

Ambient Temperature(°C)	+65	+85	+105
Coefficient	2.1	1.7	1.0


Ratings for CD 261X QX Series

U _R (Surge Voltage) Code	Rated Capa- cance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 105°C, 100kHz	Size ΦD x L	P/N	
(V)	(μF)	(Ω)	(Ω)	(mA _{rms})	(mm)	-	
160 (200) 2C	10	19.9	8	320	10×16	ECR2CQX100M□□100016	
	22	9	3.6	500	10×20	ECR2CQX220M□□100020	
	33	6	2.4	650	10×20	ECR2CQX330M□□100020	
	47	4.2	1.7	750	10×20	ECR2CQX470M□□100020	
	68	2.9	1.2	1180	12.5×20	ECR2CQX680M□□125020	
		2.9	1.2	1180	16×20	ECR2CQX680M□□160020	
	100	2	0.8	1420	12.5×25	ECR2CQX101M□□125025	
		2	0.8	1420	16×20	ECR2CQX101M□□160020	
150	1.3	0.5	1890	16×25.5	ECR2CQX151M□□160025		
220	0.9	0.4	2370	18×25.5	ECR2CQX221M□□180025		
200 (250) 2D	4.7	42.3	16.9	160	8×11.5	ECR2DQX4R7M□□080011	
		42.3	16.9	200	10×12.5	ECR2DQX4R7M□□100012	
	6.8	29.3	11.7	220	10×16	ECR2DQX6R8M□□100016	
	10	19.9	8	320	10×16	ECR2DQX100M□□100016	
	22	9	3.6	500	10×20	ECR2DQX220M□□100020	
	33	6	2.4	650	10×20	ECR2DQX330M□□100020	
	47	4.2	1.7	980	12.5×20	ECR2DQX470M□□125020	
	68	2.9	1.2	1300	12.5×25	ECR2DQX680M□□125025	
		2.9	1.2	1300	16×20	ECR2DQX680M□□160020	
	100	2	0.8	1420	16×20	ECR2DQX101M□□160020	
	150	1.3	0.5	1890	16×25.5	ECR2DQX151M□□160025	
	250 (300) 2E	4.7	42.3	16.9	160	8×11.5	ECR2EQX4R7M□□080011
			42.3	16.9	200	10×12.5	ECR2EQX4R7M□□100012
		6.8	29.3	11.7	250	10×12.5	ECR2EQX6R8M□□100012
10		19.9	8	320	10×16	ECR2EQX100M□□100016	
22		9	3.6	470	10×16	ECR2EQX220M□□100016	
		9	3.6	500	10×20	ECR2EQX220M□□100020	
33		6	2.4	760	12.5×16	ECR2EQX330M□□125016	
		6	2.4	800	12.5×20	ECR2EQX330M□□125020	
47		4.2	1.7	980	12.5×20	ECR2EQX470M□□125020	
68		2.9	1.2	1300	16×20	ECR2EQX680M□□160020	
		2.9	1.2	1300	12.5×25	ECR2EQX680M□□125025	
100		2	0.8	1530	16×25.5	ECR2EQX101M□□160025	
		2	0.8	1440	18×20.5	ECR2EQX101M□□180020	
150		1.3	0.5	1960	18×25.5	ECR2EQX151M□□180025	
350 (400) 2V	1.5	176.9	53.1	80	6.3×11.5	ECR2VQX1R5M□□063011	
		176.9	53.1	90	8×11.5	ECR2VQX1R5M□□080011	
	2.2	120.6	36.2	120	8×11.5	ECR2VQX2R2M□□080011	
		120.6	36.2	140	10×12.5	ECR2VQX2R2M□□100012	
	3.3	80.4	24.1	150	8×11.5	ECR2VQX3R3M□□080011	
		80.4	24.1	180	10×12.5	ECR2VQX3R3M□□100012	
	4.7	56.5	16.9	150	10×12.5	ECR2VQX4R7M□□100012	
	5.6	47.4	14.2	180	10×12.5	ECR2VQX5R6M□□100012	
	6.8	39	11.7	280	10×16	ECR2VQX6R8M□□100016	
	10	26.5	8	350	10×20	ECR2VQX100M□□100020	
	22	12.1	3.6	650	12.5×20	ECR2VQX220M□□125020	
	33	8	2.4	900	16×20	ECR2VQX330M□□160020	
	47	5.6	1.7	1080	16×20	ECR2VQX470M□□160020	
	68	3.9	1.2	1470	18×25.5	ECR2VQX680M□□180025	
82	3.2	0.97	1530	18×25.5	ECR2VQX820M□□180025		
400 (450) 2G	1	265.4	79.6	50	6.3×11.5	ECR2GQX010M□□063011	
		265.4	79.6	60	8×11.5	ECR2GQX010M□□080011	
	1.5	176.9	53.1	70	6.3×11.5	ECR2GQX1R5M□□063011	
		176.9	53.1	80	8×11.5	ECR2GQX1R5M□□080011	
	2.2	120.6	36.2	95	8×11.5	ECR2GQX2R2M□□080011	
		120.6	36.2	140	10×12.5	ECR2GQX2R2M□□100012	
	3.3	80.4	24.1	150	10×12.5	ECR2GQX3R3M□□100012	
		80.4	24.1	180	10×16	ECR2GQX3R3M□□100016	
	4.7	56.5	16.9	220	10×16	ECR2GQX4R7M□□100016	
	5.6	47.4	14.2	250	10×20	ECR2GQX5R6M□□100020	
	6.8	39	11.7	280	10×20	ECR2GQX6R8M□□100020	
	10	26.5	8	350	10×20	ECR2GQX100M□□100020	
	15	17.7	5.3	550	12.5×20	ECR2GQX150M□□125020	
	22	12.1	3.6	760	12.5×25	ECR2GQX220M□□125025	
		12.1	3.6	760	16×20	ECR2GQX220M□□160020	
	33	8	2.4	900	16×20	ECR2GQX330M□□160020	

U _R (Surge Voltage) Code	Rated Capa- cance	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Rated Ripple Current 105°C, 100kHz	Size ΦD x L	P/N
(V)	(μF)	(Ω)	(Ω)	(mA _{rms})	(mm)	-
400 (450) 2G	47	5.6	1.7	1180	16×25.5	ECR2GQX470M□□160025
		5.6	1.7	1180	18×20.5	ECR2GQX470M□□180020
	68	3.9	1.2	1470	18×25.5	ECR2GQX680M□□180025
	82	3.2	1	1600	18×31.5	ECR2GQX820M□□180031
	100	2.7	0.8	1778	18×36	ECR2GQX101M□□180036
450 (500) 2W	2.2	120.6	36.2	90	8×11.5	ECR2WQX2R2M□□080011
		120.6	36.2	150	10×12.5	ECR2WQX2R2M□□100012
	3.3	80.4	24.1	180	10×12.5	ECR2WQX3R3M□□100012
		80.4	24.1	190	10×16	ECR2WQX3R3M□□100016
	4.7	56.5	16.9	212	10×16	ECR2WQX4R7M□□100016
		56.5	16.9	220	10×20	ECR2WQX4R7M□□100020
	5.6	47.4	14.2	200	10×16	ECR2WQX5R6M□□100016
		47.4	14.2	250	10×20	ECR2WQX5R6M□□100020
	6.8	39	11.7	230	10×16	ECR2WQX6R8M□□100016
		39	11.7	280	10×20	ECR2WQX6R8M□□100020
	10	26.5	8	330	10×20	ECR2WQX100M□□100020
	15	17.7	5.3	450	12.5×20	ECR2WQX150M□□125020
	22	12.1	3.6	730	16×20	ECR2WQX220M□□160020
		12.1	3.6	600	12.5×25	ECR2WQX220M□□125025
33	8	2.4	980	16×25.5	ECR2WQX330M□□160025	
47	5.6	1.7	1200	18×25.5	ECR2WQX470M□□180025	
68	3.9	1.2	1575	18×31.5	ECR2WQX680M□□180031	
82	3.2	1	1675	18×36	ECR2WQX820M□□180036	
100	2.7	0.8	1730	18×36	ECR2WQX101M□□180036	
120	2.2	0.7	1820	18×40	ECR2WQX121M□□180040	
500 (550) 2H	10	26.5	9.3	360	12.5×20	ECR2HQX100M□□125020
	15	17.7	6.2	480	12.5×25	ECR2HQX150M□□125025
	22	12.1	4.2	580	16×25.5	ECR2HQX220M□□160025
	33	8	2.8	720	16×31.5	ECR2HQX330M□□160031
	47	5.6	2	900	18×31.5	ECR2HQX470M□□180031
	68	3.9	1.4	1250	18×36	ECR2HQX680M□□180036
	82	3.2	1.1	1380	20×41	ECR2HQX820M□□200041
	100	2.7	0.9	1450	20×41	ECR2HQX101M□□200041

Customer products are available on request.

Lifetime Diagram

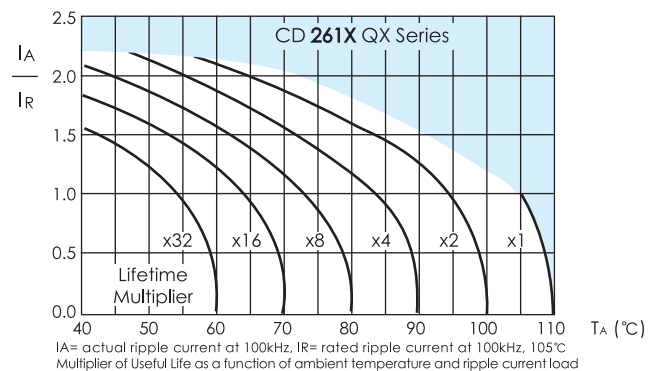

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminium Electrolytic Capacitors - Radial Leaded](#) category:

Click to view products by [Jianghai](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [RFO-100V471MJ7P#](#) [ECE-A1EGE220](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#)
[EKXG201EC3101ML20S](#) [EKZM160ETD471MHB5D](#) [NCD681K10KVY5PF](#) [NEV1000M25EF-BULK](#) [NEV100M35DC](#) [NEV100M63DE](#)
[NEV220M25DD-BULK](#) [NEV.33M100AA](#) [NEV4700M50HB](#) [NEV.47M100AA](#) [NEVH1.0M250AB](#) [NEVH3.3M250BB](#) [NEVH3.3M450CC](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESMG160ETD102MJ16S](#) [ESX472M16B](#) [227RZS050M](#)
[476CKH100MSA](#) [477RZS050M](#) [UVX1V101KPA1FA](#) [UVX1V222MHA1CA](#) [KME25VB100M-6.3X11](#) [VTL100S10](#) [VTL470S10](#)
[VTL470S16A](#) [511D336M250EK5D](#) [052687X](#) [ECE-A1CF471](#) [EKMA500ELL4R7ME07D](#) [NRE-S560M16V6.3X7TBSTF](#) [RGA221M1CTA-](#)
[0611G](#) [ERZA630VHN182UP54N](#) [UPL1A331MPH](#) [SK035M0100AZS-0611](#) [NEV1000M6.3DE](#) [NEV100M16CB](#) [NEV100M50DD-BULK](#)
[NEV2200M16FF](#) [NEV220M50EE](#) [NEV2.2M50AA](#) [NEV330M63EF](#)