



SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Brass

Contact Plating: Au or Sn Over Ni


Insulator Material: Polyester (UL94V-0)

Standard: PBT

Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

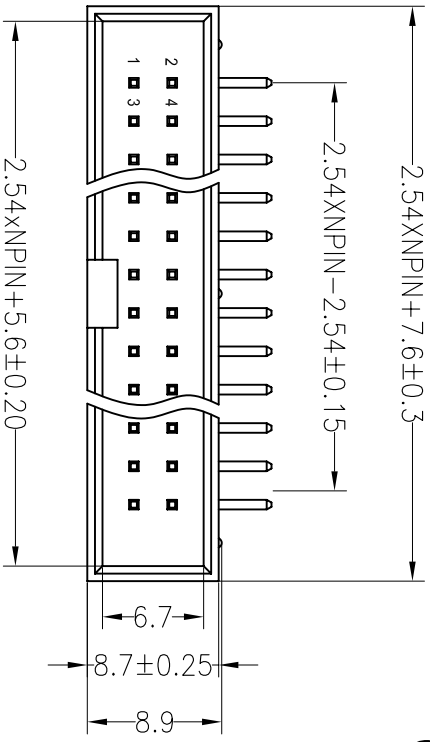



Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

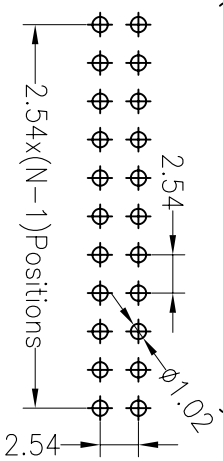

Ordering Information

3210-XX R XX X B K00 X 01

- No. of Pins Per Row: 6--64
- Contact Plating: G0:Gold Flash, G1:3U" Gold, G2:5U" Gold, G3:1.0U" Gold, G4:1.5U" Gold, G5:3.0U" Gold, SN:Tin
- Insulator Material Option: A=BK-PBT, B=BK-PA66, C=BK-PA6T, D=BK-PA46, F=BK-LCP
- Packing: 0=PE Bag, A=Troy, T=Tube, P=Tube+Cap

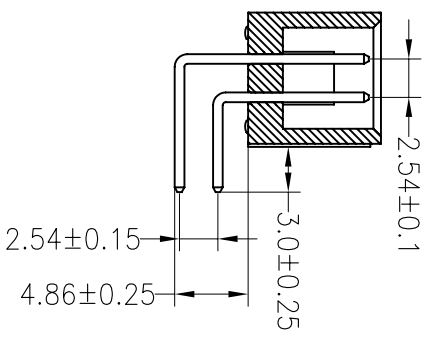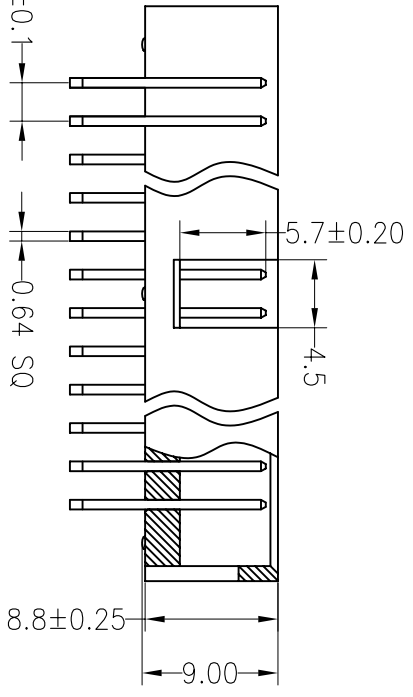

| | | | | | | | |
|-----------|-------|-----------|----------|-------|-----|--|--|
| OPERATION | DRAW | YYSUsheng | 13.08.15 | SCALE | FIT | 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONIC CO.,LTD Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892 | |
| X.X | ±0.30 | | | UNIT | mm | PART NO. | 3210-XXRXXBK00X01 2.54mm Box Header H8.8mm 90° L=16.0/L=21.0 |
| X.XXX | ±0.20 | CHECK | | SIZE | A4 | | |
| Angle | ±3° | | | SHEET | 1/1 | TITLE: | |
| DM | TOL | APPROVE | | PROJ. | | | |

| | | | |
|-----|------------|-------------------------------------|-----------|
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
| A | 2012.09.10 | NEW DRAWING | |
| B | 2013.08.15 | 变更项目针长,将原来的L=16.5/21.5改成L=16.0/21.0 | YYSUSHENG |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [jiln](#) manufacturer:

Other Similar products are found below :

[JL15EDGVC-38106G01](#) [331010SG0ABLA02](#) [JL950-95004B01](#) [JL25C-76204B01](#) [JL15EDGVC-35005G01](#) [JL25C-76206B01](#)
[321006RG0ABK00A01](#) [JL2EDGR-50806G01](#) [331026SG0ABLA02](#) [531440YBS0BW01](#) [321050MG0CBK00A01](#) [531412YBS0BW01](#)
[321034RG0ABK00A01](#) [JL15EDGVC-35009G01](#) [JL15EDGRC-38110G01](#) [331030SG0ABLA02](#) [321010RG0ABK00A02](#) [JL301-50009U02](#)
[JL250-35006E01](#) [531416YBS0BW01](#) [JL2EDGR-50808G01](#) [JL15EDGK-35003G01](#) [JL15EDGVC-25004G01](#) [JL2EDGRC-50808G01](#)
[JL2EDGRC-50809G01](#) [JL15EDGVC-38108G01](#) [JL45C-09505B01](#) [JL15EDGVC-38110G01](#) [JL15EDGK-35012G01](#) [JL127-50003G01](#)
[JL250-12106B01](#) [JL2EDGRC-50812G01](#) [JL103-50003G01](#) [JL15EDGVC-35010G01](#) [JL250-35005E01](#) [JL500H-50003G01](#) [JL500H-](#)
[50002G01](#) [JL15EDGVC-38107G01](#) [JL850-85004BA1](#) [JL2EDGV-50809G01](#) [JL500HH-50803G01](#) [321040RG0ABK00A01](#) [JL2EDGR-](#)
[50812G01](#) [JL15EDGKD-25002G01](#) [331008SG0ABLA02](#) [JL2EDGV-50810G01](#) [JL500HH-50003G01](#) [531416YBS0BW02](#)
[331040SG0ABLA02](#) [JL2EDGR-50807G01](#)