



FILE NO. 8282010

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C



Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: Polyester (UL94V-0)

Standard: PBT



Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

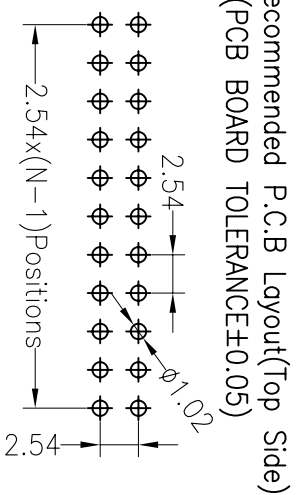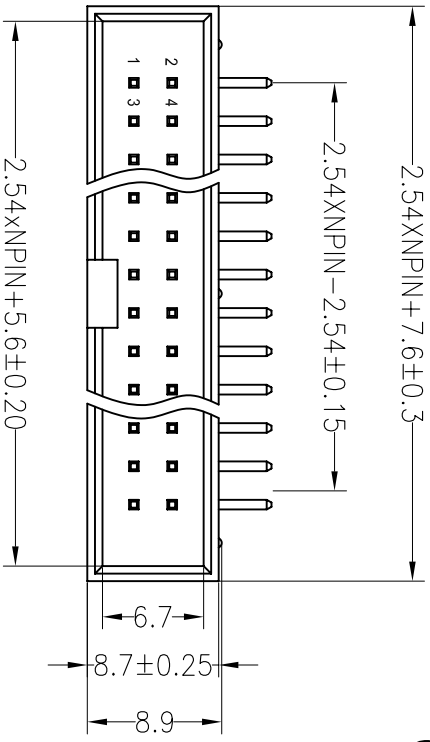

Ordering Information

3210-XX R XX X BK00 X 01

- | | | | | | |
|---------------------|-------|-----------------|--------------------|------------|---------|
| No. of Pins Per Row | 6--64 | Contact Plating | Insulator Material | Option | Packing |
| | | G0:Gold Flash | | 0=PE Bag | |
| | | G1:3U" Gold | | A=Tray | |
| | | G2:5U" Gold | | B=BK-PBT | |
| | | G3:10U" Gold | | C=BK-PA66 | |
| | | G4:15U" Gold | | D=BK-PA6T | |
| | | G5:30U" Gold | | F=BK-LCP | |
| | | SN: Tin | | P=Tube+Cap | |

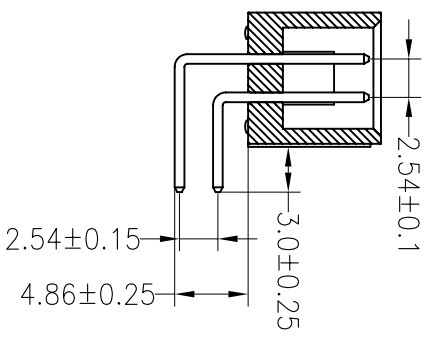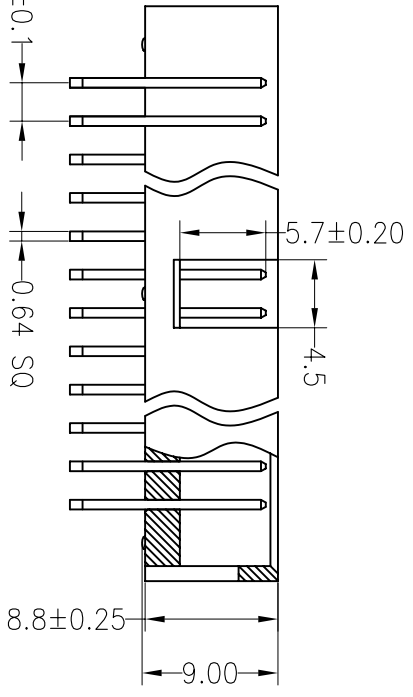

OPERATION	X.X	±0.30	DRAW	YYSsheng	13.08.15	SCALE	FIT	UNIT	mm
	X.XX	±0.20	CHECK			SIZE	A4	SHEET	1/1
ANGLE	X.XXX	±3°	APPROVE			SHEET	1/1	PROJ.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DM	TOL	PART NO.	TITLE:		
A	2012.09.10	NEW DRAWING				3210-XXRXXBK00X01	2.54mm Box Header H8.8mm 90°		
B	2013.08.15	变更项目针长,将原来的L=16.5/21.5改成L=16.0/21.0					SHENZHEN JINLING ELECTRONIC CO.,LTD		

JINLING 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [jiln](#) manufacturer:

Other Similar products are found below :

[JL15EDGVC-38106G01](#) [331010SG0ABLA02](#) [JL950-95004B01](#) [JL25C-76204B01](#) [JL15EDGVC-35005G01](#) [JL25C-76206B01](#)
[321006RG0ABK00A01](#) [JL2EDGR-50806G01](#) [331026SG0ABLA02](#) [531440YBS0BW01](#) [321050MG0CBK00A01](#) [531412YBS0BW01](#)
[321034RG0ABK00A01](#) [JL15EDGVC-35009G01](#) [JL15EDGRC-38110G01](#) [331030SG0ABLA02](#) [321010RG0ABK00A02](#) [JL301-50009U02](#)
[JL250-35006E01](#) [531416YBS0BW01](#) [JL2EDGR-50808G01](#) [JL15EDGK-35003G01](#) [JL15EDGVC-25004G01](#) [JL2EDGRC-50808G01](#)
[JL2EDGRC-50809G01](#) [JL15EDGVC-38108G01](#) [JL45C-09505B01](#) [JL15EDGVC-38110G01](#) [JL15EDGK-35012G01](#) [JL127-50003G01](#)
[JL250-12106B01](#) [JL2EDGRC-50812G01](#) [JL103-50003G01](#) [JL15EDGVC-35010G01](#) [JL250-35005E01](#) [JL500H-50003G01](#) [JL500H-](#)
[50002G01](#) [JL15EDGVC-38107G01](#) [JL850-85004BA1](#) [JL2EDGV-50809G01](#) [JL500HH-50803G01](#) [321040RG0ABK00A01](#) [JL2EDGR-](#)
[50812G01](#) [JL15EDGKD-25002G01](#) [331008SG0ABLA02](#) [JL2EDGV-50810G01](#) [JL500HH-50003G01](#) [531416YBS0BW02](#)
[331040SG0ABLA02](#) [JL2EDGR-50807G01](#)