
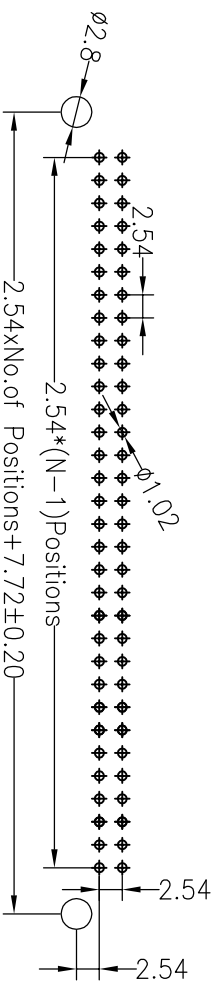
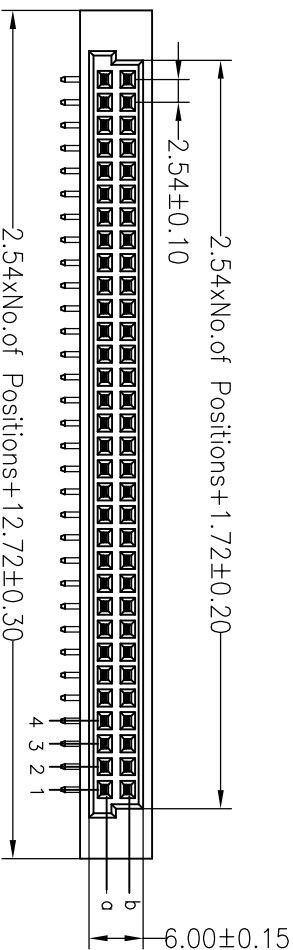

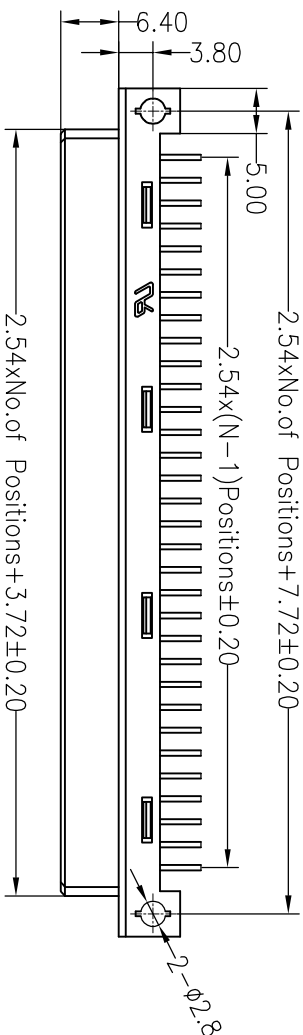


SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 30mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PBT
 Max. Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

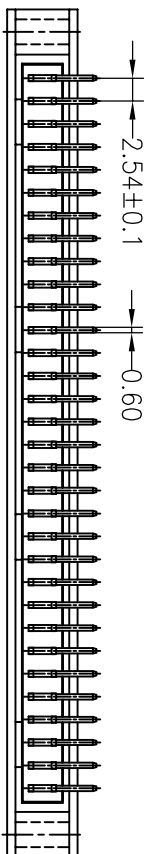

Ordering Information

35112 XX B F R XX BNA1

No. of Pins: 16-64P
 Contact Type: M=Male, F=Female
 Contact Plating: G0:Gold Flash, S1:3U" Gold, S2:5U" Gold, S3:10U" Gold, S0:Gold Flash/Tin, SN:Tin

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90
Alternate	

OPERATION		DRAW		SCALE		FIT		TITLE:	
OPERATION	DRAW	UNIT	FIT	SCALE	PROJ.	SHEET	PART NO.	PART NO.	
X.X	Y.YuSheng	mm	A4	1/1	1/1	35112XXBFRXXBNA1	35112XXBFRXXBNA1		
X.XX ±0.30	14.09.16						Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892		
X.XX ±0.20	CHECK						深圳市锦凌电子有限公司		
X.XXX ±0.10	APPROVE						SHENZHEN JINLING ELECTRONIC CO.,LTD		
Angle ±3°							Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892		
DIM TOL							SHENZHEN JINLING ELECTRONIC CO.,LTD		
CHANGE							Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892		
MODIFICATION DESCRIPTION							SHENZHEN JINLING ELECTRONIC CO.,LTD		
DATE							Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5892		
REV							SHENZHEN JINLING ELECTRONIC CO.,LTD		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [45970-4130](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [0717420006](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [YTQ-11201HQ](#) [IL-WX-10PB-HF-B-E1000E](#) [YFT-50-05-H-10-SB-K](#) [FCN-268M024-G/3D](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [74220-001](#) [354184](#) [P50-028-DDS-TG](#)