




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

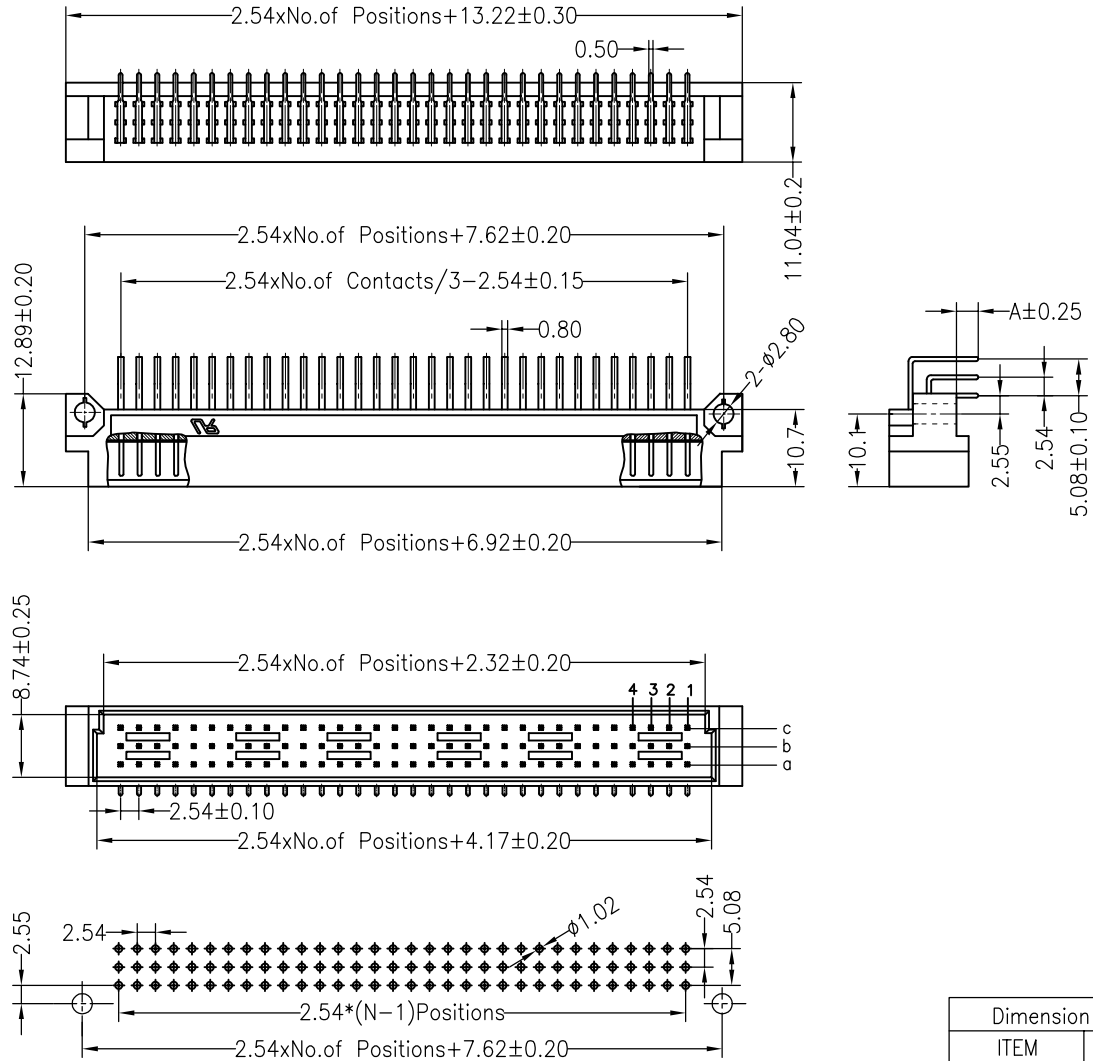

Ordering Information

35113 XX A M R XX B N A 01

No. of Pins
30~96PIN

Contact Type
M= male

Contact Plating
 G0:Gold Flash
 S2:2U" Gold
 S3:10U" Gold
 S4:15U" Gold
 S5:30U" Gold
 S0:Gold Flash/Tin
 SN:Tin

Packing
 0=PE Bag
 A=Tray

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

| Dimension antitheses list | |
|---------------------------|------|
| ITEM | A |
| Standard | 3.00 |
| Alternate | |

| | | | | | |
|-------------|---------|-----------|----------|-------|-----|
| OPERATION | DRAW | YiYuSheng | 14.09.16 | SCALE | FIT |
| X.X ±0.30 | CHECK | | | UNIT | mm |
| X.XX ±0.20 | | | | SIZE | A4 |
| X.XXX ±0.10 | | | | SHEET | 1/1 |
| Angle ±3° | APPROVE | | | PROJ. | |
| DIM TOL | | | | | |

JiLN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

| | | | |
|-----|------------|--------------------------|--------|
| B | 2014.09.16 | 增加UL标识 | |
| A0 | 2012.04.10 | NEW DRAWING | |
| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |

| | |
|----------|--------------------------|
| PART NO. | 35113XXAMRXXBNA01 |
| TITLE: | 欧式插座 公座 90度 3xNPIN 成品系列图 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [MIS-048-01-F-D-DP-K](#)
[832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [MDF7-40DP-2.54DSA\(55\)](#)
[MIT-114-03-F-D-K](#) [55323-1519](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-](#)
[7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [YTQ-](#)
[12103HQ](#) [541371078](#) [IL-WX-10PB-HF-B-E1000E](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [354184](#) [MIT-019-04-F-D-K](#) [P50-028-DDS-TG](#)
[53309-2471](#) [54546-2071](#) [1586617-1](#) [504208-3010](#) [504208-5010](#) [504248-1010](#) [504248-1210](#) [504248-2010](#) [LST-115-07-S-D](#) [LST-105-07-G-](#)
[D](#) [9159005551906](#) [NDS100-004-BF](#)