

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Contact Material: Brass

Contact Plating: Au or Sn Over Ni




Insulator Material: Polyester (UL94V-0)

Standard: PBT

Max. Processing Temp: 180°C for 30-60 seconds (200°C for 10 seconds)

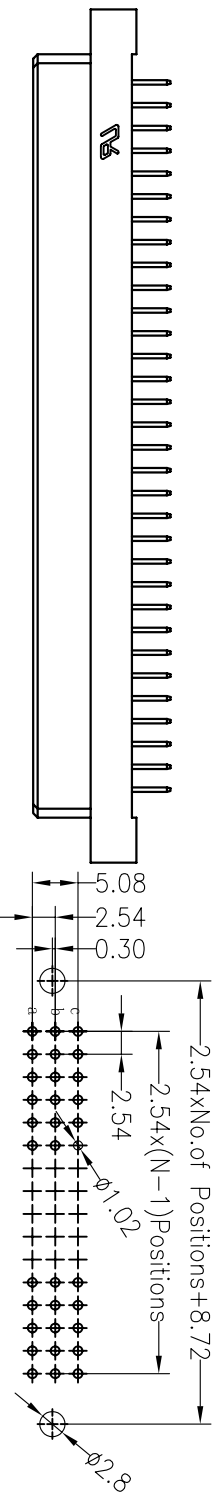

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ±0.05)

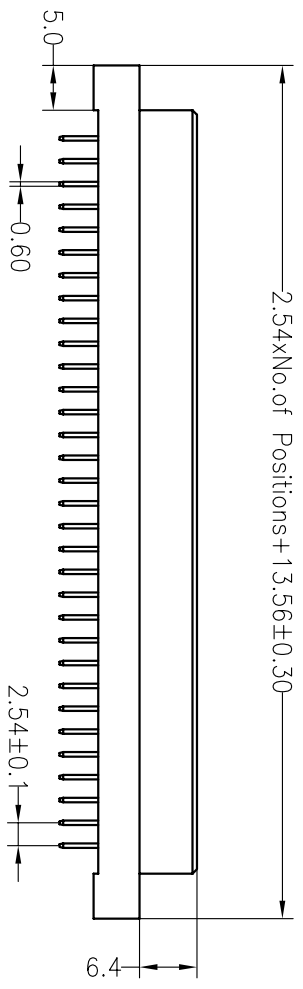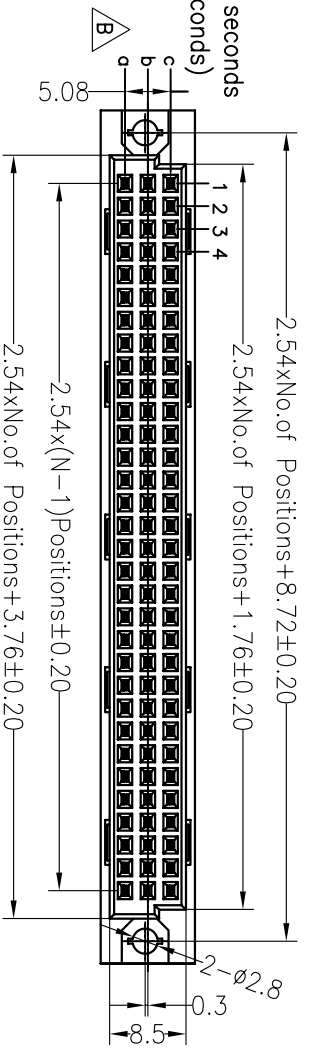

**Ordering Information**

35113 XX A F S XX BNA1

No. of Pins 320~396  
 Contact Type F=Female

Contact Plating  
 G0:Gold Flash  
 S0:Gold Flash/Tin  
 S1:2U" Gold/Tin  
 S2:5U" Gold/Tin  
 S3:10U" Gold/Tin  
 S4:15U" Gold/Tin  
 S5:30U" Gold/Tin  
 SN:Tin

Dimension antitheses list	
ITEM	A
Standard	4.00
Alternate	

OPERATION		DRAW		SCALE		FIT		PART NO.	
X.X	±0.30	YTYuSheng	16.07.05	UNIT	mm	A4	1/1	35113XXAFSXXBNA1	
X.XX	±0.20	CHECK		SIZE	A4			SHENZHEN JINLING ELECTRONIC CO.,LTD	
X.XXX	±0.10			SHEET	1/1			Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
Angle	±3°	APPROVE		PROJ.				深圳市锦凌电子有限公司	
DIM	TOL							SHENZHEN JINLING ELECTRONIC CO.,LTD	
CHANGE								DIN 41612 3xNpin 180° Female	
MODIFICATION DESCRIPTION								35113XXAFSXXBNA1	
DATE								Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992	
REV								DIN 41612 3xNpin 180° Female	

更正塑胶 A B C方向

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [93696-330](#) [224393](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [45970-4130](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [101A10019X](#) [105061100000861+](#) [55650-0588-C](#) [75140-7012](#) [87471-650](#) [YTW-30-07-H-Q-410-140](#) [YTT-112-01-H-Q](#) [063209](#) [0717420006](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [YTQ-11201HQ](#) [IL-WX-10PB-HF-B-E1000E](#) [YFT-50-05-H-10-SB-K](#) [FCN-268M024-G/3D](#) [MDF7-16DP-2.54DSA\(55\)](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [74220-001](#) [354184](#) [P50-028-DDS-TG](#)