

NOTES1:

- UL Standard
- 1.Rated voltage/current : 300V / 20A
- 3.Torque value : M2.5 , 3.5Lb.in
- 4.Wire range : 30~12AWG

IEC Standard

- 1.Rated voltage/current : 250V / 24A
- 2.Torque value : M2.5 , 0.4N·m
- 3.Wire range : 0.5~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.00mm, Poles : N=02~24P
- 3.Stripping length : 12~13mm
- 4.Withstanding voltage : AC2000V/1Min
- 5.Operating temperature: -40°C~+105°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range		mm	
Over	TO	Over	TO	Over	TO
6	10	30	60	100	150
10	24	30	60	100	150
10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00
					±2°





7.RoHS Compliance

Ordering Information

JL105R-500 XX G 0 1

Pitch 500=5.0PH No.of pins 2P~24P Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey

Packging 0=Pe bag T=Tube A=Tray

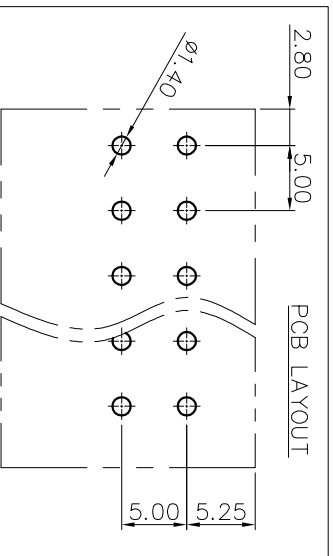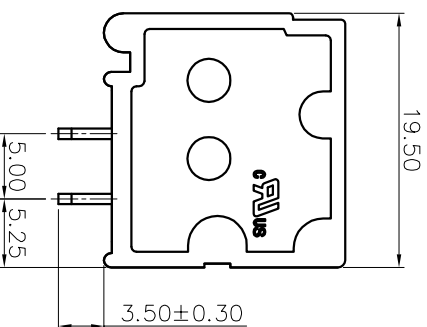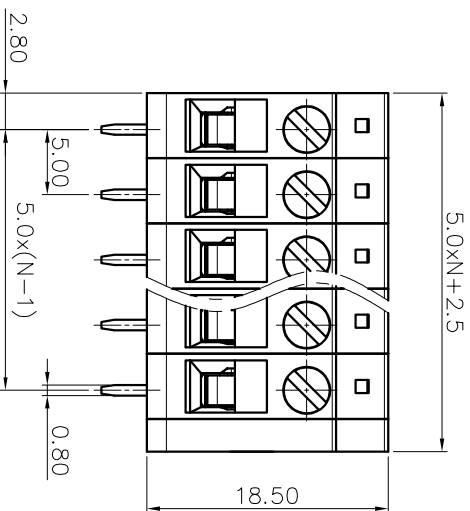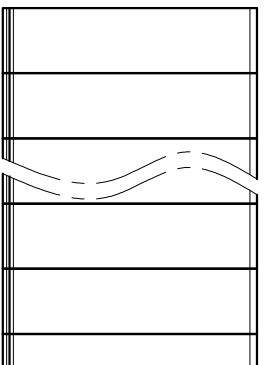

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.08.16

DRAW	SHUANGPING ZHENG	SCALE	FIT	<p>JIN 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>
CHECK	LICHAD LIU	UNIT	mm	
APPROVE	YONGLIANG GAO	SIZE	A4	
		SHEET	1/1	PART NO.
		PRDJ		JL105R-500XXG01
				TITLE:
				JL105R-5.0-XXP 螺钉式/弯脚/绿色

1 2 3 4 5 6 7 8 9

A B C D E F G

1 2 3 4 5 6 7 8 9

A B C D E F G

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)