

NOTES1:

- UL Standard  
 1. Rated voltage/current : 300V / 20A  
 3. Torque value : M2.5 , 3.5Lb.in  
 4. Wire range : 30~12AWG

IEC Standard

1. Rated voltage/current : 450V / 24A  
 2. Torque value : M2.5 , 0.4N·m  
 3. Wire range : 0.5~2.5mm<sup>2</sup>

NOTES2:







1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 7.50mm, Poles : N=02~16P  
 3. Stripping length : 12~13mm  
 4. Withstanding voltage : AC2500V/1Min  
 5. Operating temperature: -40°C~+105°C  
 6. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		Tolerance	
Over	TO	Over	TO	Over	TO
6	10	30	60	100	150
10	24	30	60	100	150
				±0.15	±0.20
				±0.30	±0.50
				±0.70	±1.00
				±1.30	±2.0

7. RoHS Compliance

# Ordering Information

JL105V-750 XX G 0 1

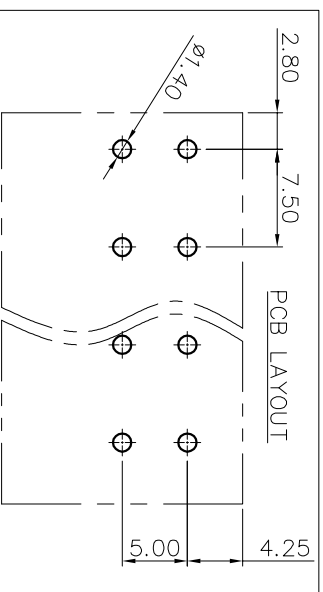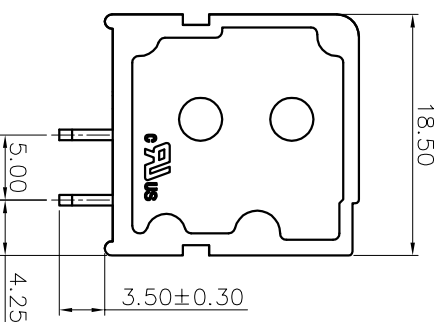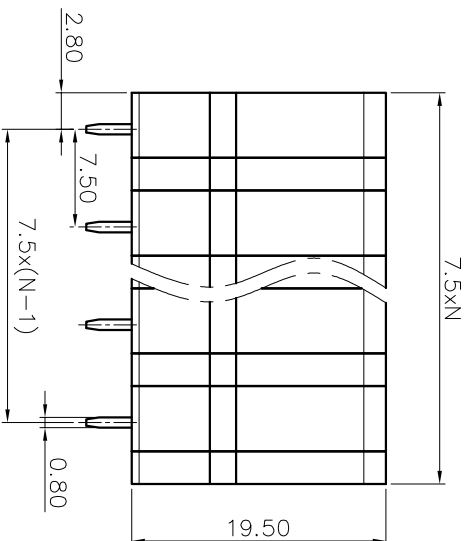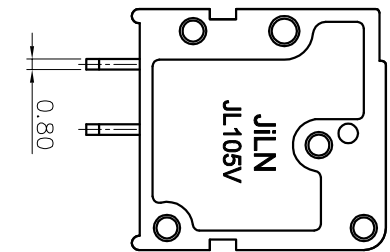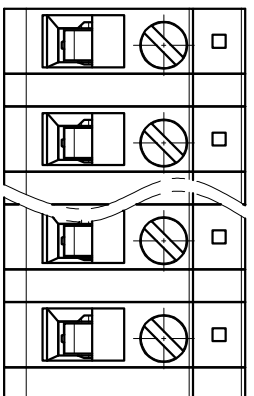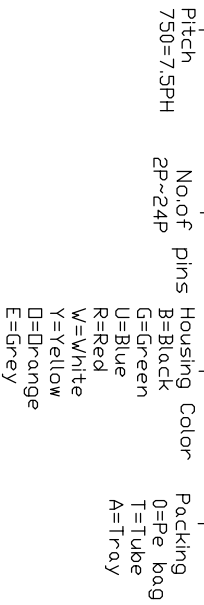

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.08.16

DRAW	SHUANGPING ZHENG	SCALE	FIT	<p><b>jiLN</b>® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD</p>
CHECK	LICHAD LIU	UNIT	mm	
APPROVE	YONGLIANG GAO	SIZE	A4	
		SHEET	1/1	PART NO.
		PRD		JL105V-750XXG01
				TITLE:
				JL105V-7.5-XXP 螺钉式直脚绿色

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)  
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)  
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)  
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)