

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 60A
2. Torque value : M4 , 10.53Lb.in
3. Wire range : 20~6AWG

IEC Standard

1. Rated voltage/current : 1000V/65A
2. Torque value : M4 , 1.2N.m
3. Wire range : 2.5~16mm²

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.16mm, Poles : N=01~12P
3. Stripping length : 10~11mm
4. Withstanding voltage : AC3500V/1Min
5. Operating temperature: -40°C~+105°C
6. Undimensioned tolerances:





Pitch range in mm	Nominal dimension range in mm		-	~	D				
	Over	TO				Over	TO	Over	TO
6	10	TO	30	60	100	150	0.1/10		
10	24	TO	30	60	100	150	<		
±0.15±0.20		±0.30±0.50		±0.50±0.70		±1.00±1.30		±2°	

7. RoHS Compliance

Ordering Information

JL136HT-1016 XX G 0 1

Pitch 1016=1016PH
 No.o.f pins IP~12P
 Housing Color B=Black G=Green U=Blue R=Red W=White Y=Yellow D=Orange E=Grey
 Packing 0=Pe bag T=Tube A=Tray

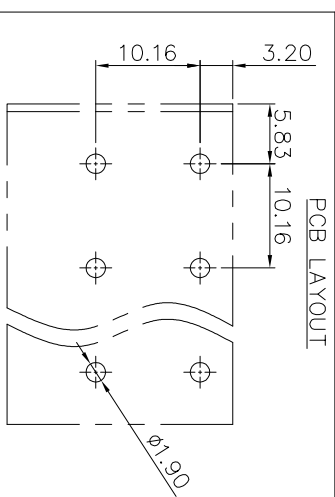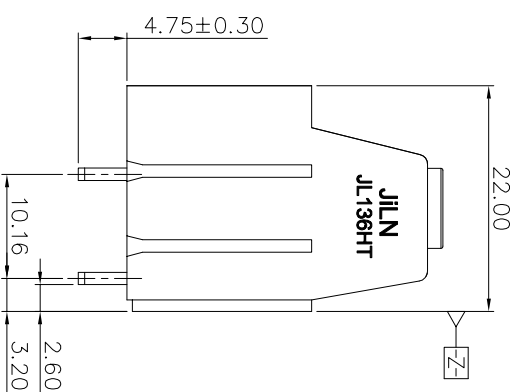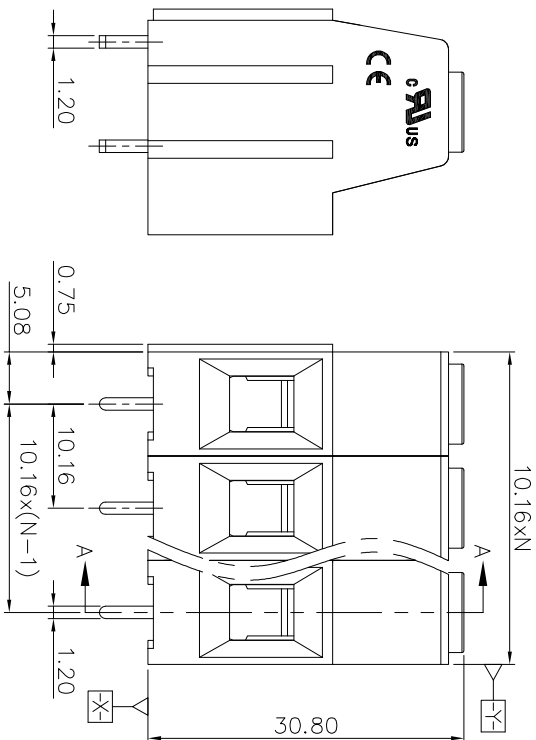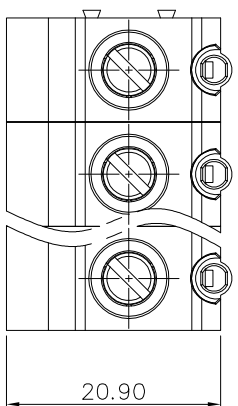

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.23

DRAW	SHUANGPING ZHENG
CHECK	LICHAD LIU
APPROVE	YONGLIANG GAO

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PRD J	

JIN 东莞市锦凌电子有限公司
 DONGGUAN JINLING ELECTRONIC CO., LTD

PART NO. JL136HT-1016XXG01

TITLE: JL136HT-10.16-XXP螺钉式绿色/一字螺丝

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)