


SPECIFICATIONS

Rated (额定参数): 300V, 10A  
 Dielectric strength (抗电强度): AC1500V/1 Minute  
 Insulation Resistance (绝缘电阻): 1000MΩ Min  
 Contact Resistance (接触电阻): 20mΩ Max  
 Wire Range (线径): 14~22AWG  
 Strip length (剥线长度): 10mm  
 Temp. range (操作温度): -40°C~+105°C  
 MAX Soldering (瞬时温度): +260°C, 5s

Housing Material (塑件): PA66 (UL94 V-0)  
 Contact (端子): Brass, Tin plating (黄铜镀锡)  
 Reed (弹片): Stainless steel (不锈钢)

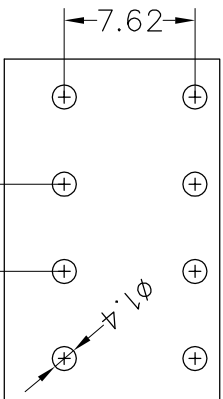

Recommended P.C.B Layout

Ordering Information





JL 142R - 508 XX X X 1

Pitch  
 508=5.08PH  
 750=7.5PH  
 762=7.62PH

No. of pins  
 2P~30P

Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey

Packing  
 0=Pe  
 bog  
 T=Tube  
 A=Tray

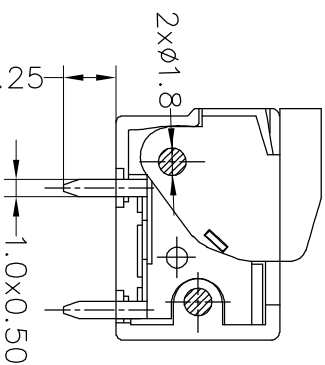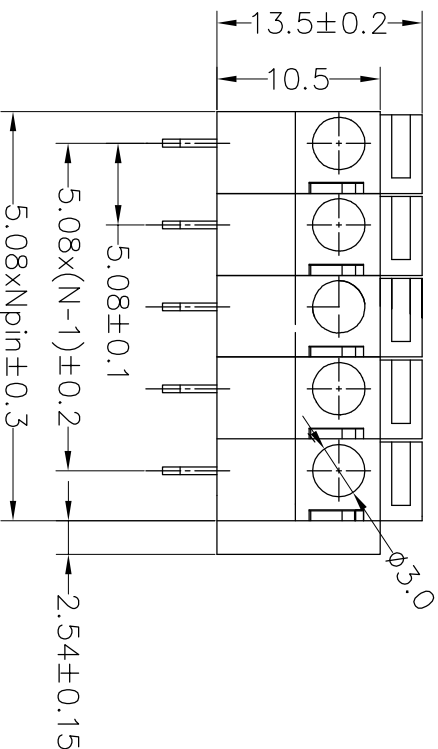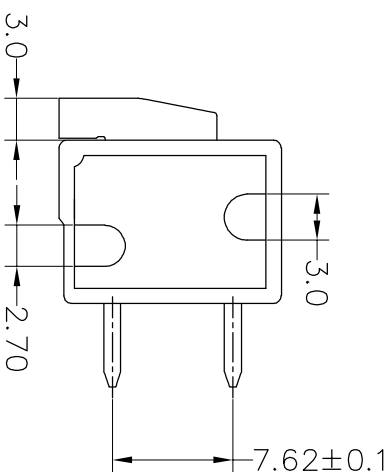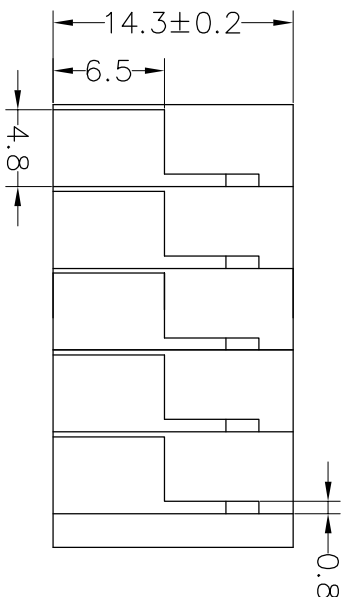

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.12.17	NEW DRAWING	
1			

OPERATION	SCALE	DRAW	DATE
X.X	±0.30	yiyusheng	18.12.17
X.XX	±0.20	CHECK	
X.XXX	±0.10	APPROVE	
Angle	±3°		
DIM	TOL		

UNIT	FIT	SCALE	PROU.
mm	A4	1/1	
SIZE	SHEET	PART NO.	TITLE:
A4	1/1	JL142R-508XXXXX1	5.08mm SCREWLESS Terminal Blocks
<p><b>JILN</b> 深圳市锦凌电子有限公司                  SHENZHEN JINLING ELECTRONIC CO.,LTD                  Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992</p>			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MPT-275](#) [ELM10110G](#) [BA311TU](#)  
[BA411SU](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVEB-153](#) [1705142](#) [1-796689-8](#) [1841320000](#) [S451](#) [29.007](#) [29.116](#) [30.204](#)  
[30.503](#) [30.756](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1710052](#) [20020316-G071B01LF](#) [20020327-C061B01LF](#) [29590](#) [30.652](#) [30.710](#)  
[30.754](#) [30.757](#) [32.058](#) [37.206](#) [37.208](#) [37.507](#) [37.558](#) [38331-5812](#) [38331-8018](#) [38540-1910](#) [39.002](#) [MBE-1517](#) [MBE-153](#)