


SPECIFICATIONS

Rated (额定参数): 300V, 10A
 Dielectric strength (抗电强度): AC1500V/1 Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20mΩ Max
 Wire Range (线径): 14~22AWG
 Strip length (剥线长度): 10mm
 Temp. range (操作温度): -40°C~+105°C
 MAX Soldering (瞬时温度): +260°C, 5s

Housing Material (塑件): PA66 (UL94 V-0)
 Contact (端子): Brass, Tin plating (黄铜镀锡)
 Reed (弹片): Stainless steel (不锈钢)

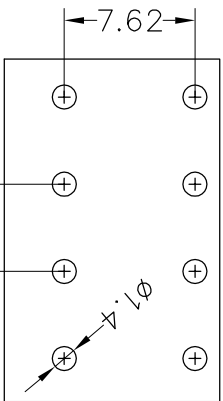

Recommended P.C.B Layout

Ordering Information





JL 142R - 508 XX X X 1

Pitch
 508=5.08PH
 750=7.5PH
 762=7.62PH

No. of pins
 2P~30P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 0=Pe bag
 T=Tube
 A=Tray

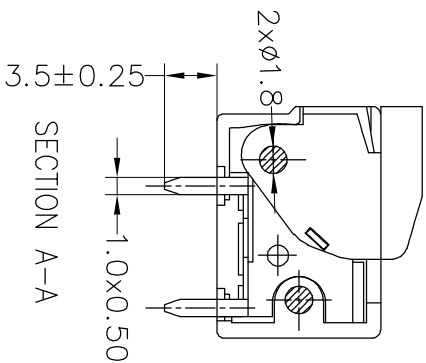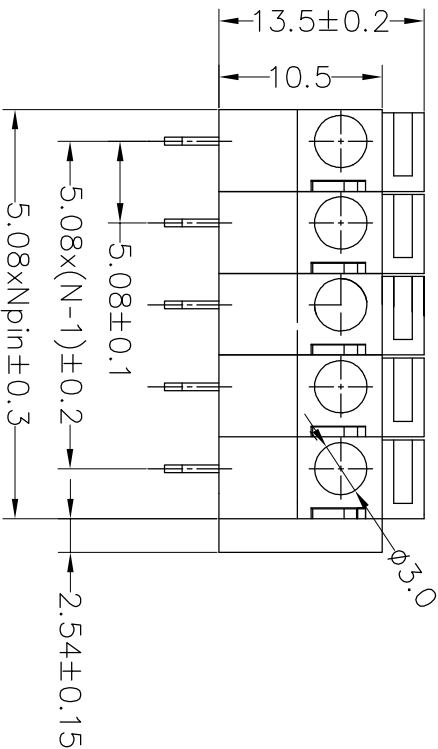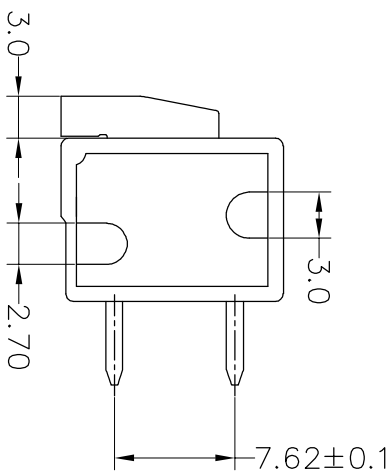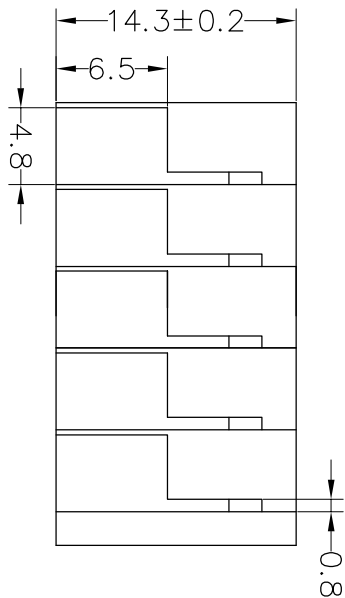

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2018.12.17	NEW DRAWING	
1			

OPERATION	SCALE	FIT
±0.30	mm	A4
±0.20		
±0.10		
±3°		

OPERATION	DRAW	yiyusheng	18.12.17	SCALE	FIT	PART NO.	JL142R-508XXXXX1
CHECK	APPROVE			UNIT	mm	TITLE:	5.08mm SCREWLESS Terminal Blocks
ANGLE				SIZE	A4		
DIM				SHEET	1/1		
TOL				PROU.			

JILIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[MBE-1512](#) [MBE-1520](#) [MBE-154](#) [MBE-156](#) [MBES-156](#) [MH-2512](#) [MHE-132](#) [MHE-163](#) [MI-254 \(35\)](#) [MI-272](#) [MPT-275](#) [ELM10110G](#)
[BA311TU](#) [BA411SU](#) [MV-253/NCNOC](#) [MV-254-D](#) [MV-255](#) [MV-493](#) [MVE-252](#) [MVE-253](#) [MVE-273](#) [MVEB-153](#) [1700096](#) [1705142](#)
[1712417](#) [1713088](#) [1745195](#) [1760594](#) [1-796689-8](#) [1-796692-6](#) [1800114](#) [20020314-C121B01LF](#) [20020316-G041B01LF](#) [KP03215000J0G](#)
[KP04215000J0G](#) [S451](#) [29.007](#) [29.116](#) [30.103](#) [30.106](#) [30.503](#) [30.608](#) [30.755](#) [30.853](#) [9872-0-00-15-00-00-33-0](#) [996750](#) [1706303](#) [1710052](#)
[1712418](#) [1733868](#)