

HSF RoHS **CE** **RAI** us **CE**

SPECIFICATIONS

Rated (额定参数): 300V, 8A
 Dielectric strength (抗电强度): AC1500V/1 Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20mΩ Max
 Screw Torque (扭矩): 0.2Nm (1.7Lb.in)
 Wire Range (线径): 1.6~28AWG
 Strip length (剥线长度): 6~7mm
 Temp. range (操作温度): -40°C~+105°C
 MAX Soldering (瞬时温度): +260°C, 5s

Housing Material (塑件): PA66 (UL94 V-0)
 Contact (端子): Phosphor Bronze, Tin plating (磷铜镀锡)
 Clamp (方块): Brass (黄铜), Ni plating (镀镍)
 Screw (螺丝): M2.0 Steel, Zinc plating (钢, 镀锌)

PITCH RANGE	NOMINAL DIMENSION RANGE					
	IN MM		IN MM		IN MM	
OVER	OVER	OVER	OVER	OVER	OVER	OVER
TO	TO	TO	TO	TO	TO	TO
6	10	10	30	60	100	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±1.00

Ordering Information







JL15EDGKA - XXX XX G X 1

Pitch
 350=3.5PH
 381=3.81PH

No. of pins
 2P, 3P, 4P~24P

Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey

Packing
 O=Pe bog
 T=Tube
 A=Troy

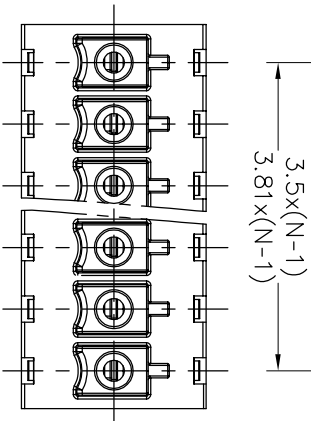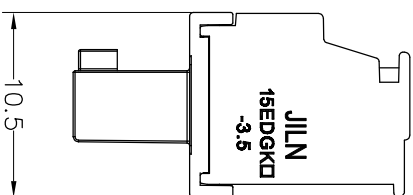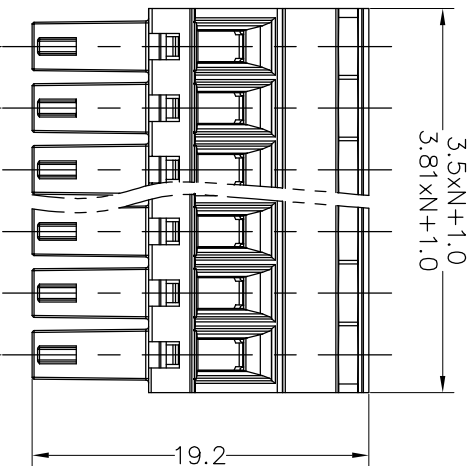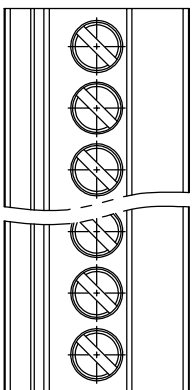

OPERATION	DRAW		SCALE	FIT	PART NO.
	XX	±0.30			
X.XX	±0.20	CHECK	A4		JL15EDGKA-XXXXXXG1
X:XXX	±0.10	APPROVE	1/1		3.5/3.81 Pitch Female Pluggable Terminal Blocks
Angle	±3°				
DIM	TOL				

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.	TITLE:
A0	2020.03.03	NEW DRAWING				JL15EDGKA-XXXXXXG1
1						3.5/3.81 Pitch Female Pluggable Terminal Blocks

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)