

**HSF** RoHS **c** **UL** us **CE**

**SPECIFICATIONS**

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Screw Torque(扭矩): 0.2Nm (1.7Lb.in)  
 Wire Range(线径):16~28AWG  
 Strip length(剥线长度):6~7mm  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+260℃,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀镍)  
 Clamp(方块): Brass(黄铜), Ni plating(镀镍)  
 Screw (螺丝): M2.0 Steel, Zinc plating(钢,镀锌)

| PITCH RANGE<br>IN MM |           |            | NOMINAL DIMENSION RANGE<br>IN MM |            |            |             |             |
|----------------------|-----------|------------|----------------------------------|------------|------------|-------------|-------------|
| T0                   | OVER<br>6 | OVER<br>10 | T0                               | OVER<br>30 | OVER<br>60 | OVER<br>100 | OVER<br>150 |
| 6                    | T0<br>10  | T0<br>24   | 30                               | T0<br>60   | T0<br>100  | T0<br>150   |             |
| ±0.10                | ±0.15     | ±0.25      | ±0.30                            | ±0.30      | ±0.50      | ±0.70       | ±1.00       |

**Ordering Information**






**JL15EDGKA - XXX XX G X 1**

Pitch  
350=3.5PH  
381=3.81PH

No.of pins  
2P,3P,4P~24P

Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
E=Grey

Packing  
O=Pe bag  
T=Tube  
A=Tray

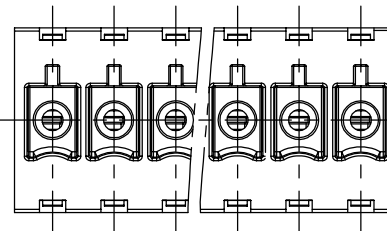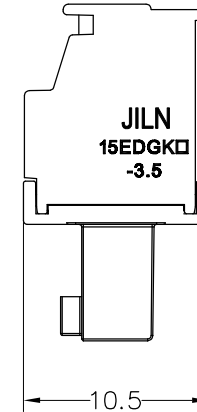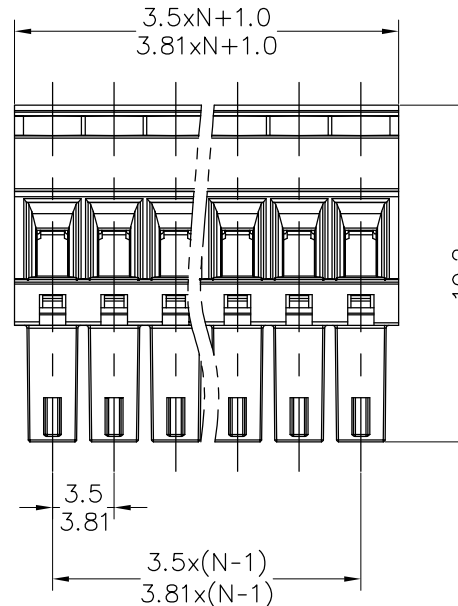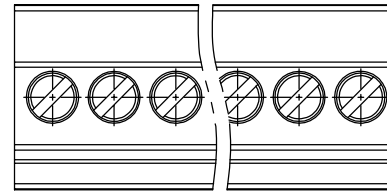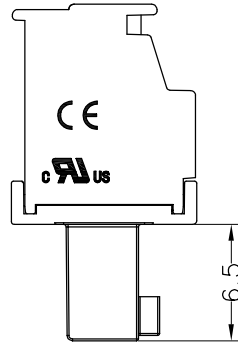

|             |         |          |          |       |     |
|-------------|---------|----------|----------|-------|-----|
| OPERATION   | DRAW    | iyusheng | 20.03.03 | SCALE | FIT |
| X.X ±0.30   | CHECK   |          |          | UNIT  | mm  |
| X.XX ±0.20  | APPROVE |          |          | SIZE  | A4  |
| X.XXX ±0.10 |         |          |          | SHEET | 1/1 |
| Angle ±3°   |         |          |          | PROJ. |     |
| DIM TOL     |         |          |          |       |     |

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

|     |            |                          |        |  |  |          |   |
|-----|------------|--------------------------|--------|--|--|----------|---|
| A0  | 2020.03.03 | NEW DRAWING              |        |  |  | PART NO. | JL15EDGKA-XXXXXGX1                              |
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE |  |  | TITLE:   | 3.5/3.81 Pitch Female Pluggable Terminal Blocks |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)