
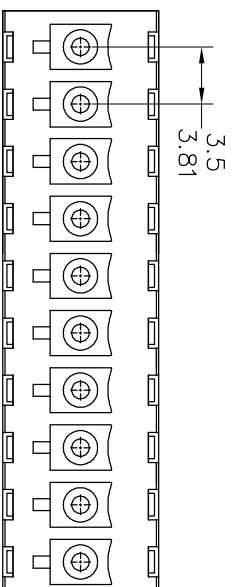

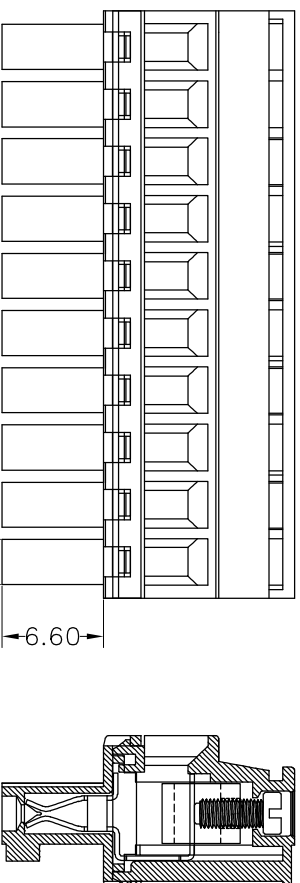
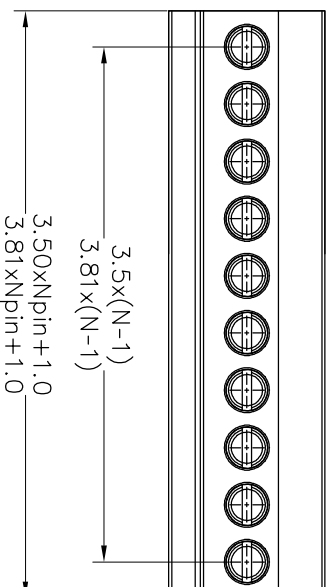


## SPECIFICATIONS

Rated (额定参数): 300V, 8A  
 Dielectric strength (抗电强度): AC1500V/1 Minute  
 Insulation Resistance (绝缘电阻): 1000MΩ Min  
 Contact Resistance (接触电阻): 20mΩ Max  
 Screw Torque (扭矩): 0.2Nm (1.7Lb.in)  
 Wire Range (线径): 28~16AWG  
 Strip length (剥线长度): 6~7mm  
 Temp. range (操作温度): -40°C~+105°C  
 MAX Soldering (瞬时温度): +250°C, 5s

Housing Material (塑件): PA66 (UL94 V-0)  
 Contact (端子): Phosphor Bronze, Tin plating (磷铜镀锡)  
 Clamp (方块): Brass (黄铜), Ni plating (镀镍)  
 Screw (螺丝): M2.0 Steel, Zinc plating (钢, 镀锌)

PITCH RANGE	NOMINAL DIMENSION RANGE					
	IN MM	IN MM	IN MM	IN MM	IN MM	IN MM
OVER 6 TO 10	OVER 10 TO 24	OVER 30 TO 60	OVER 60 TO 100	OVER 100 TO 150	OVER 150 TO 150	OVER 150 TO 150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70 ±1.00

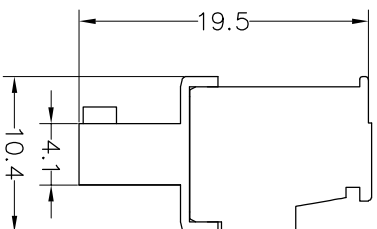

## Ordering Information

JL15EDGKB-XXX XX G X 1

Pitch 350=3.5PH 2P, 3P, 4P~24P  
 381=3.81PH  
 No. of pins  
 Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 O=Orange  
 E=Grey  
 Pocking  
 O=Pe bog  
 T=Tube  
 A=Toy

OPERATION	DRAW	BEN	17.01.05	SCALE	FIT
				UNIT	mm
XX	±0.30			A4	1/1
X:XX	±0.20				
X:XXX	±0.10				
Angle	±3°				
DIM	TOL				

OPERATION	DRAW	BEN	17.01.05	SCALE	FIT
CHECK					
APPROVE					

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROU.	

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992  
 PART NO. JL15EDGKB-XXXXXXG1  
 TITLE: 3.50/3.81 Pitch Female Pluggable Terminal Blocks

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2017.01.05	NEW DRAWING	
1			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)