

SPECIFICATIONS

Rated (额定参数): 300V, 8A
 Dielectric strength (抗电强度): AC1500V/1 Minute
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Contact Resistance (接触电阻): 20mΩ Max
 Screw Torque (扭矩): 0.2Nm (1.7Lb.in)
 Wire Range (线径): 28~16AWG
 Strip length (剥线长度): 6~7mm
 Temp. range (操作温度): -40°C~+105°C
 MAX Soldering (瞬时温度): +250°C, 5s






Housing Material (塑件): PA66 (UL94 V-0)
 Contact (端子): Phosphor Bronze, Tin plating (磷铜镀锡)
 Clamp (方块): Brass (黄铜), Ni plating (镀镍)
 Screw (螺丝): M2.0 Steel, Zinc plating (钢, 镀锌)

PITCH RANGE	NOMINAL DIMENSION RANGE					
	IN MM	IN MM	IN MM	IN MM	IN MM	IN MM
OVER	OVER	OVER	OVER	OVER	OVER	OVER
TO	TO	TO	TO	TO	TO	TO
6	10	30	60	100	150	150
10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
						±1.00

Ordering Information

JL15EDGKB-XXX XX G X 1

Pitch
 350=3.5PH
 381=3.81PH
 No. of pins
 2P, 3P, 4P~24P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 O=Orange
 E=Grey
 Pocking
 O=Pe bog
 T=Tube
 A=Tray

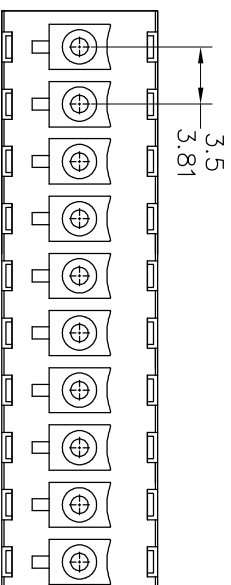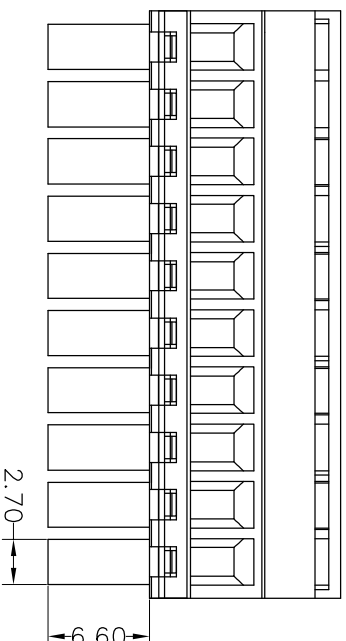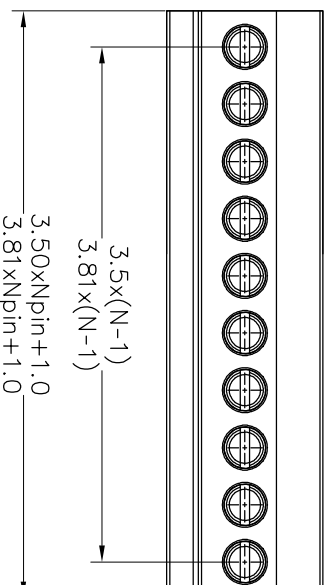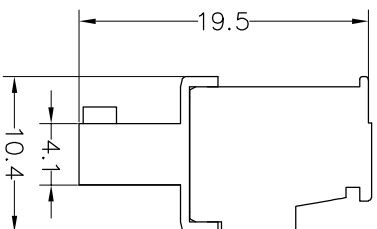

OPERATION	OPERATION	OPERATION	OPERATION	OPERATION	OPERATION	OPERATION	OPERATION	OPERATION	OPERATION
XX	±0.30	XX	±0.20	XX	±0.10	XX	±0.10	XX	±0.10
X:XX	±0.20	X:XX	±0.20	X:XX	±0.10	X:XX	±0.10	X:XX	±0.10
Angle	±3°	Angle	±3°	Angle	±3°	Angle	±3°	Angle	±3°
DIM	TOL	DIM	TOL	DIM	TOL	DIM	TOL	DIM	TOL

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	BEN	17.01.05	SCALE	FIT	UNIT	SIZE	SHEET	PROU.	PART NO.	TITLE:
A0	2017.01.05	NEW DRAWING	CHECK	APPROVE			A4	1/1					JL15EDGKB-XXXXXXG1	3.50/3.81 Pitch Female Pluggable Terminal Blocks
1														

JIN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)