

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A

2. Withstanding voltage : AC1250V/1Min.

3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree 2

Overvoltage category III

Rate impulse voltage(KV) 2.5KV

Rate voltage(V) 320V

Rate current(A) 6A

2. Wire range : 0.2~0.5mm²

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.54mm, Poles : N=04~48P

3. Stripping length : 7~8mm

4. Operating temperature: -40°C~+105°C


5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm		Tolerance
	Over	Under	
6 TO 10	10 TO 10	30 TO 30	0.1/10
10 TO 24	24 TO 30	60 TO 60	<
±0.15	±0.20	±0.30	±1.30
		±0.50	±1.00
		±0.70	±1.30






6. RoHS Compliance

Ordering Information

JL15EDGKDH-254 XX B 0 1

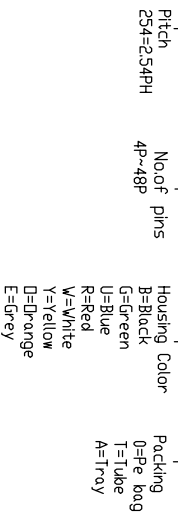

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A		NEW	22.3.3
B		按实物修改字符	Z.S.P 22.4.8

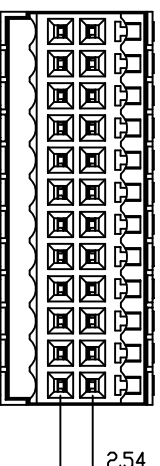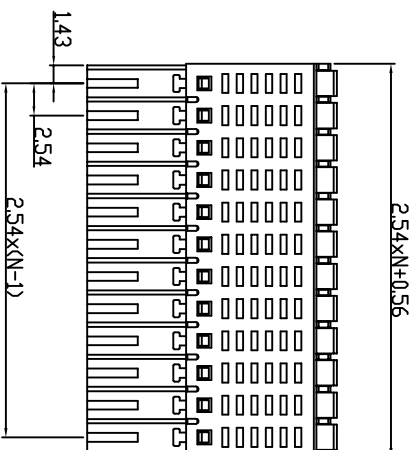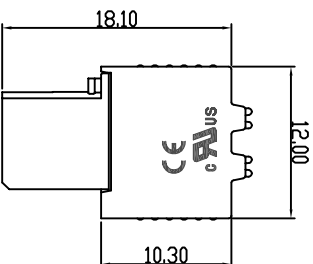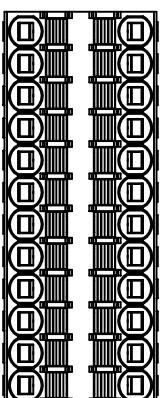

DRAW	SHUANGPING ZHENG		SCALE	FIT	PART NO.	JILIN® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO		SHEET	1/1	TITLE:	JL15EDGKDH-254-2XNP插拔式母座黑色
			PRD.			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#)
[PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#)
[ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1740291](#) [1740628](#) [1740990](#)
[1746952](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)
[1812513](#) [1823215](#) [1836066](#)