

NOTES1:

- 1. Rated voltage/current : 150V / 5A
- 2. Withstanding voltage : AC1250V/1Min.
- 3. Wire range : 30~20AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate Impulse voltage(KV)	2.5KV
Rate voltage(V)	320V
Rate current(A)	6A

- 2. Wire range : 0.2~0.5mm²

NOTES2:


- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5mm, Poles : N=04~48P
- 3. Stripping length : 7~8mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm	Over	Under
Over 6	Over 30	Over 100	Over 150
TO 6	TO 10	TO 60	TO 100
Over 10	Over 24	Over 30	Over 60
TO 10	TO 24	TO 30	TO 100
±0.15	±0.20	±0.30	±0.50
		±0.70	±1.00
		±1.30	±2*

6. RoHS Compliance

Ordering Information

JL15EDGKD^H-350 XX B 0 1

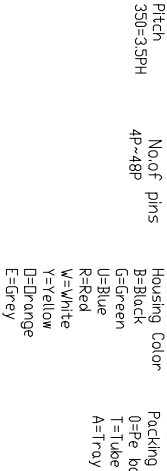






5	Spring	Stainless Steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	PA66-GF	UL94V-0
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DRAW	SHUANGPING ZHENG
CHECK	LICHAD LIU
APPROVE	YINGLIANG GAO

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.	JL15EDGKD ^H -350XXB01
	JL15EDGKD ^H -3.5-2XN ^H 插拔式母座/黑色
TITLE:	

REVISION RECORD			
REV	EON	DESCRIPTION	DATE
A		NEW	22.12.15

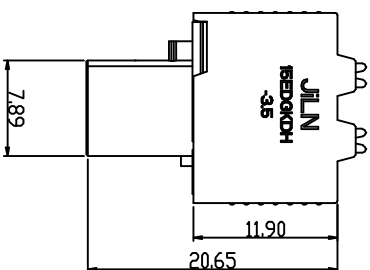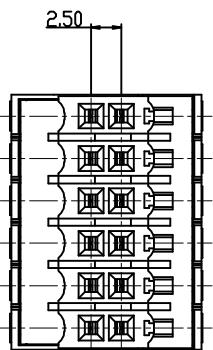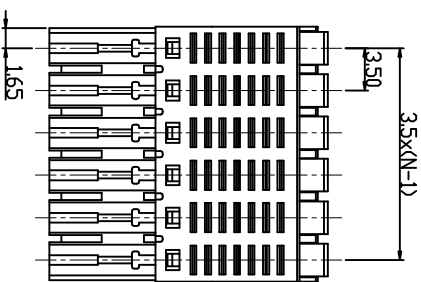

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)