

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1500V/1Min.
3. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	250V
Rate current(A)	7A

2. Wire range : 0.2~1.3mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 3.5mm, Poles : N=02~22P
3. Stripping length : 6~7mm
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		mm
	Over	Over	
6 TO 10	10 TO 30	60 TO 100	0.1/10
10 TO 24	30 TO 60	100 TO 150	≤
±0.15/±0.20	±0.30/±0.30	±0.70/±1.00	±1.30

6. RoHS Compliance

## Ordering Information

**JL15EDGKDM-350 XX G 01**

Pitch  
350=3.5PH




No. of pins  
2P, 3P, 4P~24P

Housing Color

- B=Black
- G=Green
- U=Blue
- R=Red
- W=White
- Y=Yellow
- O=Orange
- E=Grey

Packing

- 0=Pe\_bog
- A=Troy

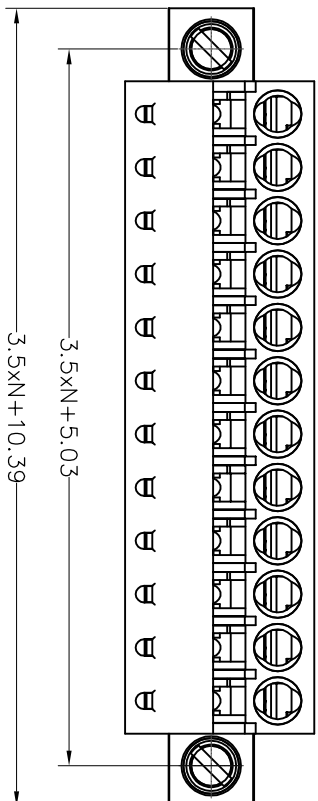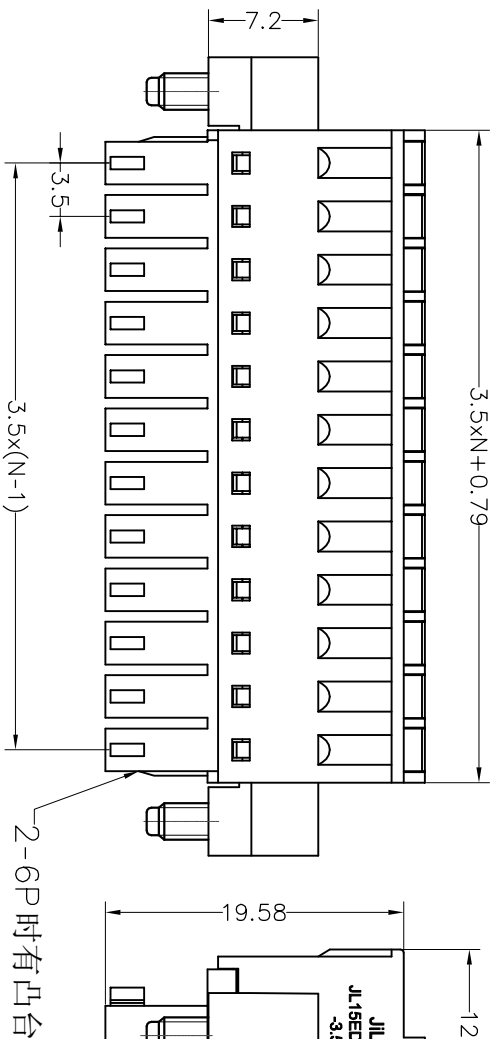

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

DRAW	SCALE	FIT	PART NO.	TITLE:
	UNIT	mm		
CHECK	SIZE	A4	JL15EDGKDM-350XXG01	JINLING 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD
	SHEET	1/1		
APPROVE	PROJ.		JL15EDGKDM-3.5-XXP插拔式母座/绿色/带耳	

**JINLING** 东莞市锦凌电子有限公司  
DONGGUAN JINLING ELECTRONIC CO., LTD

A

B

C

D

E

F

G

B

C

D

E

F

G

1

2

3

4

5

6

7

8

9

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)