

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 8A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Wire range : 24~16AWG

IEC Standard

| | | | |
|--------------------------|-------|-------|-------|
| 1. Pollution degree | 2 | 2 | 3 |
| Overvoltage category | II | III | III |
| Rate impulse voltage(KV) | 2.5KV | 2.5KV | 2.5KV |
| Rate voltage(V) | 320V | 160V | 160V |
| Rate current(A) | 8A | | |

- 2. Wire range : 0.2~1.0mm², 1.5mm²(sol)

NOTES2:






- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.81mm, Poles : N=04~48P
- 3. Stripping length : 8~9mm
- 4. Operating temperature: -40°C~+105°C
- 5. Undimensioned tolerances:

| Pitch range in mm | Nominal dimension range | | | mm |
|-------------------|-------------------------|-------------|-------------|--------|
| | Over | Over | Over | |
| 6 TO 10 | 6 TO 10 | 30 TO 60 | 60 TO 100 | 0.1/10 |
| 10 TO 24 | 10 TO 24 | 30 TO 60 | 100 TO 150 | ≤ |
| ±0.15/±0.20 | ±0.30/±0.30 | ±0.50/±0.50 | ±0.70/±1.00 | ±1.30 |

6. RoHS Compliance

Ordering Information

JL15EDGKNHCM-381 XX G 0 1

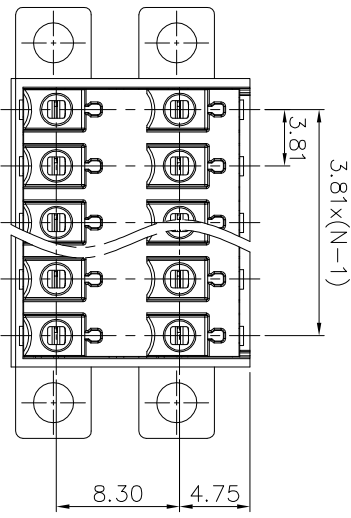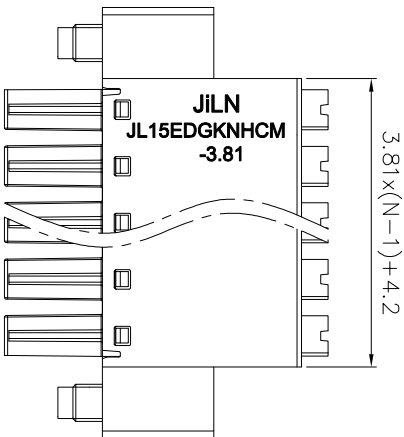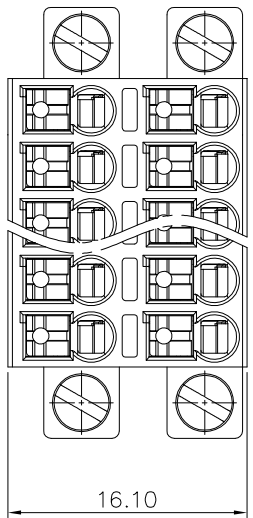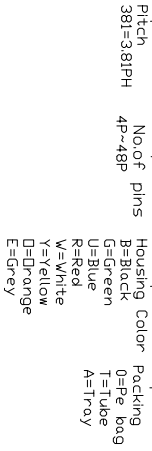

| REVISION RECORD | | | | |
|-----------------|-----|-------------|------|----------|
| REV | ECN | DESCRIPTION | DRFT | DATE |
| A0 | | NEW | | 21.06.08 |

| | | | | | | |
|---------|------------------|-----|-------|-----|----------|--------------------------------|
| DRAW | SHUANGPING ZHENG | | SCALE | FIT | PART NO. | JL15EDGKNHCM-381XXG01 |
| | UNIT | mm | UNIT | A4 | | |
| CHECK | LICHAD LIU | | SIZE | 1/1 | TITLE: | JL15EDGKNHCM-381-2XNP 插拔式母座/绿色 |
| | SHEET | 1/1 | PRD J | | | |
| APPROVE | YONGLIANG GAO | | | | | |

JILIN 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)