

**HSF** ROHS **us** **CE**

**SPECIFICATIONS**






Rated(额定参数): 150V,8A  
 Dielectric strength(抗电强度): AC:1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Wire Range(线径):26~16AWG  
 Strip length(剥线长度):10mm  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+250℃,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Reed(弹片): Stainless steel (不锈钢)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)  
 Button(手柄): POM, Color:Orange

	PITCH RANGE		NOMINAL DIMENSION RANGE				
	IN MM		IN MM				
TO	OVER	OVER	OVER	OVER	OVER	OVER	OVER
	6	10	10	30	60	100	150
6	TO	24	TO	30	TO	100	150
	10		60	100	150		
	±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70
							±1.00

**Ordering Information**

**JL15EDGKNH - 350 XX X X 1**

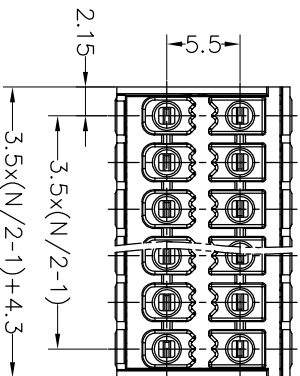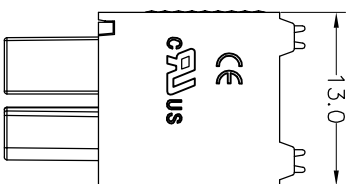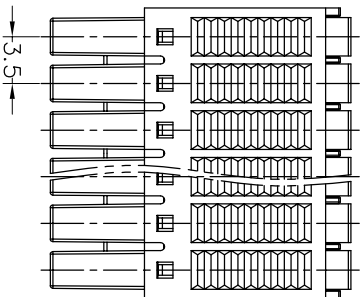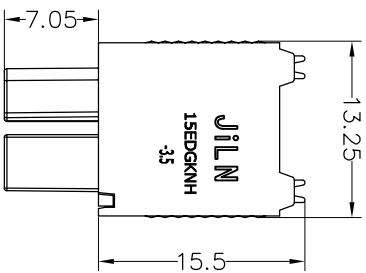

REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL		APPROVE		DRAW		yiyusheng		19.12.12		SCALE		FIT		PART NO.		TITLE:	
A0		2019.12.12		NEW DRAWING				Angle		±3°		APPROVE		CHECK						UNIT		A4		JL15EDGKNH-350XXXX1		3.5mm Pitch Female Pluggable Terminal Blocks	
1		2		3		4		5		6		7		8		9											

**JILN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)