

HSF ROHS **us** **CE**

SPECIFICATIONS

Rated(额定参数): 150V,8A
 Dielectric strength(抗电强度): AC:1500V/1 Minute
 Insulation Resistance(绝缘电阻):1000MΩ Min
 Contact Resistance(接触电阻):20mΩ Max
 Wire Range(线径):26~16AWG
 Strip length(剥线长度):10mm
 Temp. range(操作温度): -40℃~+105℃
 MAX Soldering(瞬时温度):+250℃,5s






Housing Material(塑件): PA66 (UL94 V-0)
 Reed(弹片): Stainless steel (不锈钢)
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)
 Button(手柄): POM, Color:Orange

	PITCH RANGE		NOMINAL DIMENSION RANGE					
	IN MM		IN MM		IN MM		IN MM	
TO	OVER	OVER	TO	OVER	TO	OVER	TO	OVER
6	10	10	30	60	60	100	100	150
	10	24	30	TO	TO	TO	TO	150
			60	100	150			
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00	

Ordering Information

JL15EDGKNH - 350 XX X X 1

Pitch
350=3.5PH
 No.of pins
4P~48P
 Housing Color
 B=Black
 G=Green
 U=Blue
 R=Red
 W=White
 Y=Yellow
 O=Orange
 E=Grey
 Packing
 O=Pe bog
 A=Tray

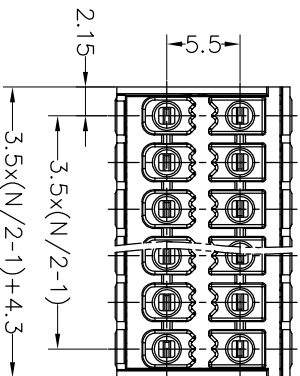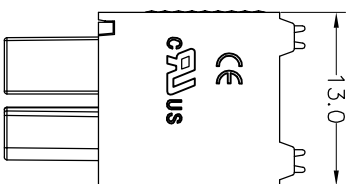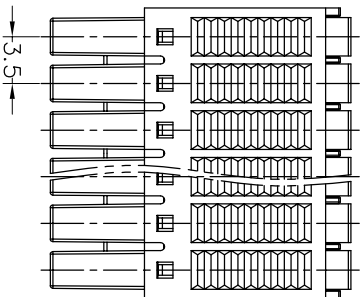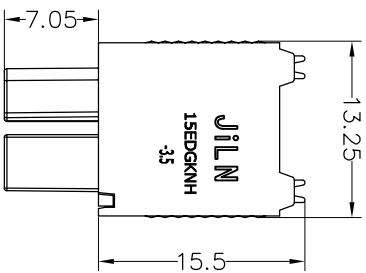

OPERATION	DRAW	yiyusheng	19.12.12	SCALE	FIT	PART NO.	TITLE:
				UNIT	mm		
XX	±0.30						
X:XX	±0.20	CHECK					
X:XXX	±0.10						
Angle	±3°	APPROVE					
DIM	TOL						

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

JL15EDGKNH-350XXXX1

3.5mm Pitch Female Pluggable Terminal Blocks

1	2	3	4	5	6	7	8	9
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	PROJ.			
A0	2019.12.12	NEW DRAWING						

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pluggable Terminal Blocks](#) category:

Click to view products by [JILN](#) manufacturer:

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)