

SPECIFICATIONS

Rated(额定参数): 300V,8A  
 Dielectric strength(抗电强度): AC1500V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Wire Range(线径):28~16AWG  
 Strip length(剥线长度):8~9mm  
 Temp. range(操作温度): -40℃~+105℃  
 MAX Soldering(瞬时温度):+250℃,5s





Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Phosphor Bronze, Tin plating(磷铜镀锡)

PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM		IN MM		IN MM	
OVER	TO	OVER	TO	OVER	TO	OVER	TO
6	10	10	30	60	100	150	150
6	10	24	30	60	100	150	150
±0.10	±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00

# Ordering Information

**JL15EDGKN - 350 XX G X 1**

Pitch  
350=3.5PH  
 No.of pins  
2P,3P,4P~24P  
 Housing Color  
B=Black  
G=Green  
U=Blue  
R=Red  
W=White  
Y=Yellow  
O=Orange  
F=Grey  
 Packing  
O=Pe bog  
A=Troy

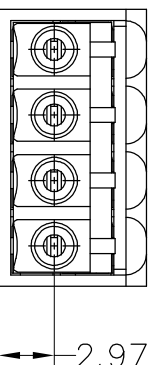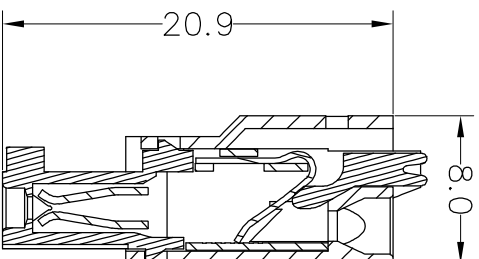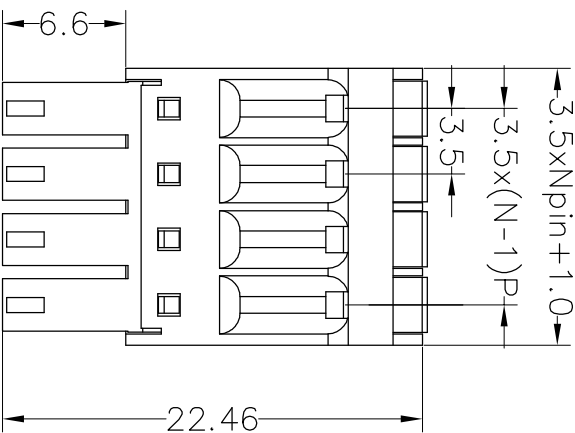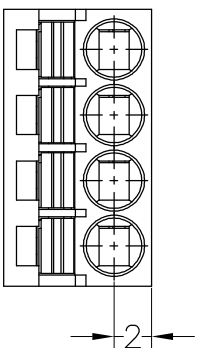

A		B		C		D		E		F		G	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	OPERATION	DRAW	SCALE	FIT	PART NO.	TITLE:	jilin 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD JL15EDGKN-350XXGX1 3.5mm Pitch Female Pluggable Terminal Blocks		
A0	2020.05.22	NEW DRAWING			<del>X.X</del> X.XX X.XXX Angle DIM	yiyusheng 20.05.22 mm A4 1/1 PROJ.	FIT mm A4 1/1 PROJ.		JL15EDGKN-350XXGX1	3.5mm Pitch Female Pluggable Terminal Blocks			
1	2	3		4	5	6	7	8	9				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP03-3,50](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFT07250](#) [ELVD12100](#) [ELVF09400](#) [ELVP03100](#) [ELXH071G0E](#) [1700410](#) [1702246](#) [1705229](#) [1714537](#) [1717806](#) [1719600](#) [1728941](#) [1734692](#) [1734795](#) [1740291](#) [1740628](#) [1746952](#) [1750207](#) [1752865](#) [1754115](#) [1754144](#) [1756913](#) [1760051](#) [1760336](#) [1765111](#) [1776388](#) [1777701](#) [1783410](#) [1800227](#) [1801080](#) [1809474](#)