

**SPECIFICATIONS**

Rated(额定参数): 150V,4A  
 Dielectric strength(抗电强度): AC:1250V/1 Minute  
 Insulation Resistance(绝缘电阻):1000MΩ Min  
 Contact Resistance(接触电阻):20mΩ Max  
 Temp. range(操作温度): -40°C~+105°C  
 MAX Soldering(瞬时温度):+250°C,5s

Housing Material(塑件): PA66 (UL94 V-0)  
 Contact(端子): Brass, Tin plating(黄铜镀锡)

PITCH RANGE IN MM		NOMINAL DIMENSION RANGE IN MM		OVER		OVER		OVER	
TO	6	OVER	10	OVER	30	OVER	60	OVER	100
TO	10	TO	24	TO	30	TO	60	TO	100
TO	10	TO	24	TO	30	TO	60	TO	100
±0.10	±0.15	±0.25	±0.30	±0.30	±0.30	±0.50	±0.70	±1.00	

## Ordering Information




**JL15EDGVC-XXX XX X X 1**

Pitch  
 250=2.50PH  
 254=2.54PH

No. of pins  
 2P~24P

Housing Color  
 B=Black  
 G=Green  
 U=Blue  
 R=Red  
 W=White  
 Y=Yellow  
 O=Orange  
 E=Grey

Packing  
 O=Pe bag  
 T=Tube  
 A=Troy

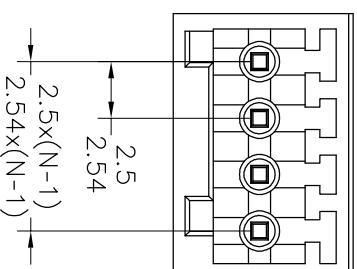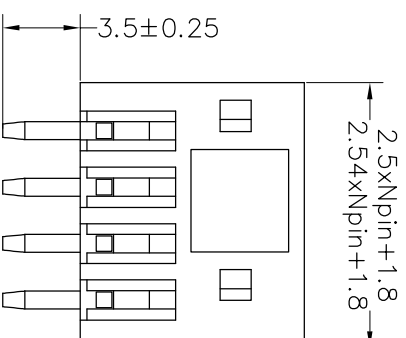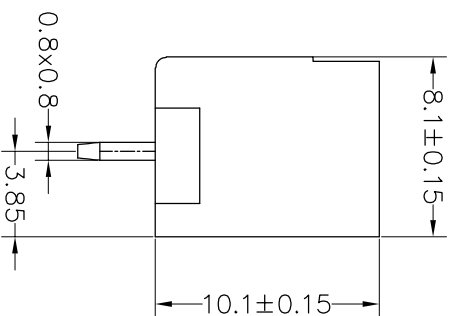

OPERATION		DRAW		SCALE		FIT		PART NO.	
XX	±0.30	Ben	2017.01.05	UNIT	mm	A4	1/1	JL15EDGVC-XXXXXX11	
X:XX	±0.20	CHECK		SIZE					
X:XXX	±0.10	APPROVE		SHEET					
Angle	±3'			PROU.					
DIM	TOL								

**JIN** 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONIC CO.,LTD  
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

2.50/2.54mm Pitch Male  
 Pluggable Terminal Blocks

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1703243](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)