

NOTES1:

UL Standard

1. Rated voltage/current : 150V / 5A

2. Withstanding voltage : AC1250V/1Min.

3. Wire range : 30~20AWG

IEC Standard

|                          |       |
|--------------------------|-------|
| 1. Pollution degree      | 2     |
| Overvoltage category     | III   |
| Rate impulse voltage(KV) | 2.5KV |
| Rate voltage(V)          | 320V  |
| Rate current(A)          | 6A    |

2. Wire range : 0.2~0.5mm<sup>2</sup>

NOTES2:

1. Dimension shall be interpreted per

ASME Y14.5-2009

2. Pitch : 2.54mm, Poles : N=04~48P

3. Stripping length : 7~8mm

4. Operating temperature: -40°C~+105°C

5. Undimensioned tolerances:


| Pitch range in mm | Nominal dimension range in mm |          | Tolerance |
|-------------------|-------------------------------|----------|-----------|
|                   | Over                          | Under    |           |
| 6 TO 10           | 10 TO 24                      | 30 TO 60 | 0.1/10    |
| ±0.15             | ±0.20                         | ±0.30    | ±0.50     |
|                   |                               | ±0.70    | ±1.00     |
|                   |                               |          | ±1.30     |
|                   |                               |          | ±2°       |

6. RoHS Compliance






### Ordering Information

JL15EDGKDHM-254 XX

B 0 1

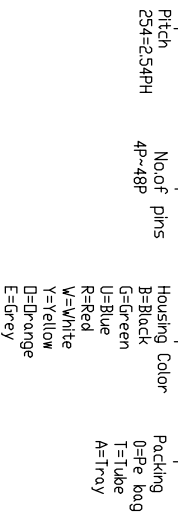

| REVISION RECORD |     |             |           |
|-----------------|-----|-------------|-----------|
| REV             | ECN | DESCRIPTION | DRFT DATE |
| A               |     | NEW         | 22.3.3    |

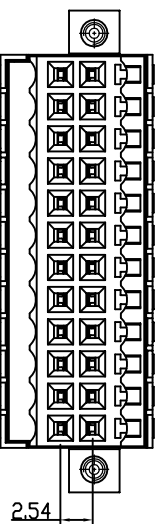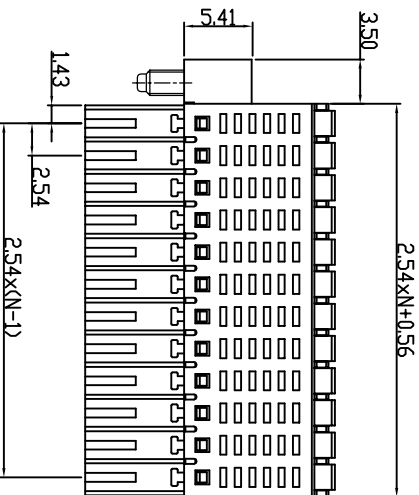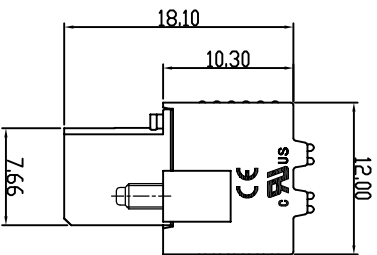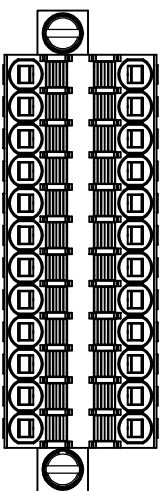

|         |                  |            |       |     |                      |                                |
|---------|------------------|------------|-------|-----|----------------------|--------------------------------|
| DRAW    | SHUANGPING ZHENG |            | SCALE | FTT | PART NO.             | TITLE:                         |
|         | CHECK            | LICHAO LIU | UNIT  | mm  |                      |                                |
| APPROVE | YONGLIANG GAO    |            | SIZE  | A4  | JL15EDGKDHM-254XXB01 | JL15EDGKDHM-2.54-2XN 插拔式母座黑色带耳 |
|         |                  |            | SHEET | 1/1 |                      |                                |
|         |                  |            | PRD.  |     |                      |                                |

**JILN** 东莞市锦凌电子有限公司  
DONGGUAN JINLING ELECTRONIC CO., LTD

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [JILN](#) manufacturer:*

Other Similar products are found below :

[57.510.0053](#) [721-104/026-047](#) [721-204/026-045](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [860505](#) [860516](#) [860810](#) [GBPACX-12](#)  
[93.731.4953.0](#) [PVP03-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [1377680000](#) [1531000000](#) [1546228-5](#) [ELFP03110](#) [ELFP10210](#) [ELFT07250](#)  
[ELVD12100](#) [ELVF09400](#) [ELXH071G0E](#) [1725220000](#) [1760336](#) [1855000000](#) [19346](#) [1946309](#) [1973592](#) [19892](#) [25.320.4053.1](#) [25.320.4553.9](#)  
[25.320.4753.1](#) [25.320.5453.1](#) [25.340.0353.1](#) [25.340.1053.1](#) [25.345.3553.0M001](#) [25.640.3553.1](#) [SH02-5,08](#) [SH06-3,81](#) [SH08-5,08](#) [SH08-](#)  
[5,08-K](#) [SH12-5,08](#) [SHS04-5,00](#) [30.303](#) [30.305](#) [30.306](#) [PHP09-5,08](#) [25.193.0453.0](#) [25.320.4653.1](#) [25.332.2453.1](#)